




608 MHz Bandpass Filter

Part Number: AE608B9621

Specifications:

- Center Frequency: 608 MHz
- Insertion Loss @ Fc : <1dB
- Passband 578-638 MHz Flatness <3dB
- Return Loss >14dB 590-665 MHz
- Rejection >50dB @ 0-508 MHz
- >50dB @ 708-2000 MHz

Response Plot:

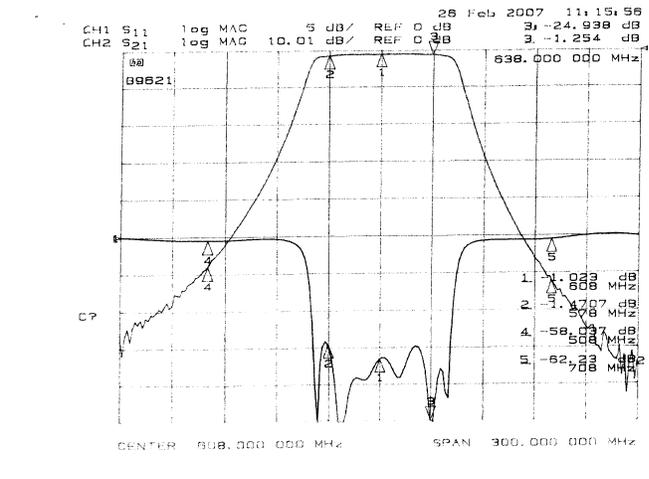

Outline Drawing:

