



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

491 MHz CDMA 450 F-Band RF-Rx Saw Filter

Part Number: AM491S502




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	491.2	-
Insertion Loss in 489.0 ~ 493.5 MHz	dB	-	2.5	3.5
VSWR in 489.0 ~ 493.5 MHz	-	-	1.5	2.0
Stop Band Attenuation:				
0.3 ~ 479.0 MHz	dB	40	50	-
479.0 ~ 483.5 MHz	dB	35	49	-
515.0 ~ 800.0 MHz	dB	40	49	-
800.0 ~ 1200.0 MHz	dB	30	42	-
1200.0 ~ 2000.0 MHz	dB	20	35	-


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	27
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size and Type	3.8 x 3.8 x 1.4 mm		P	



Outline Drawing:

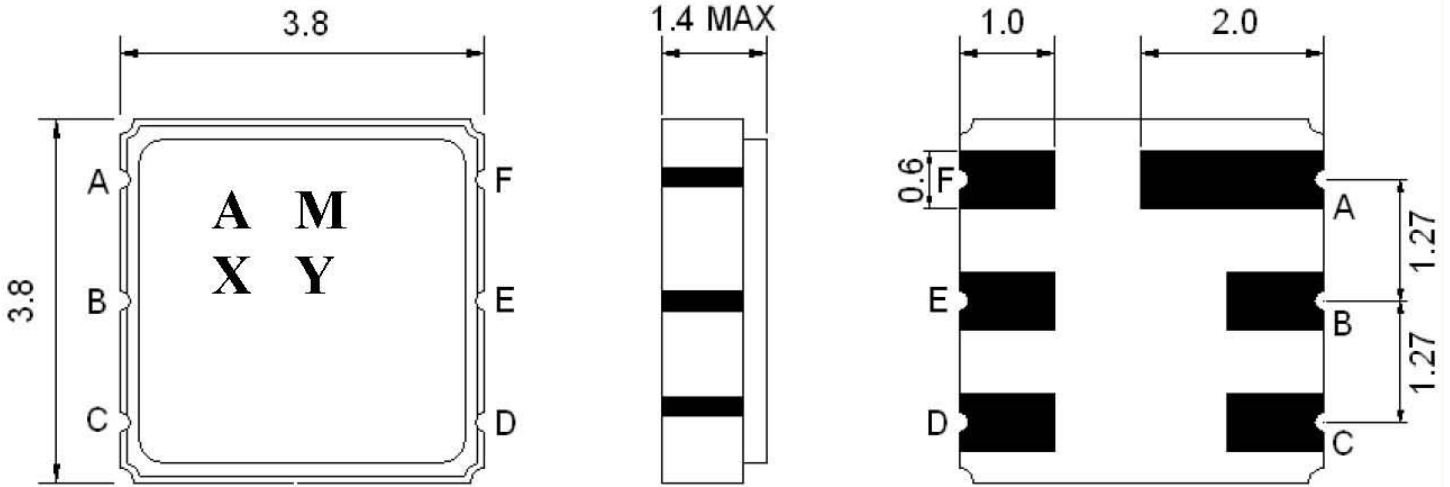



Testing Environment:

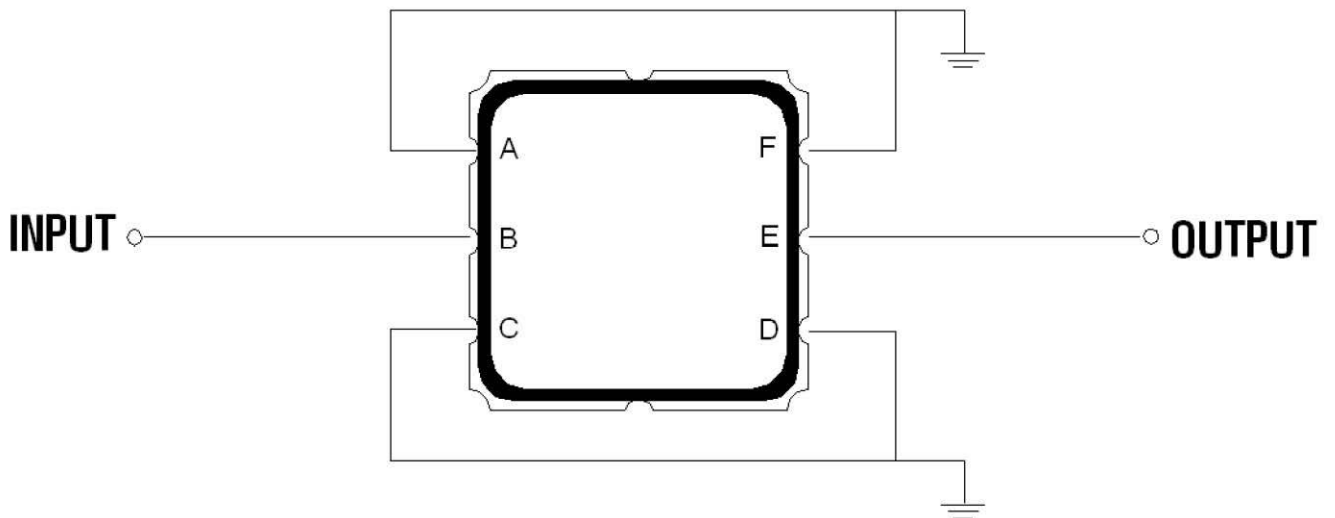

Source & Load Impedance: 50 Ω





Response Plot:

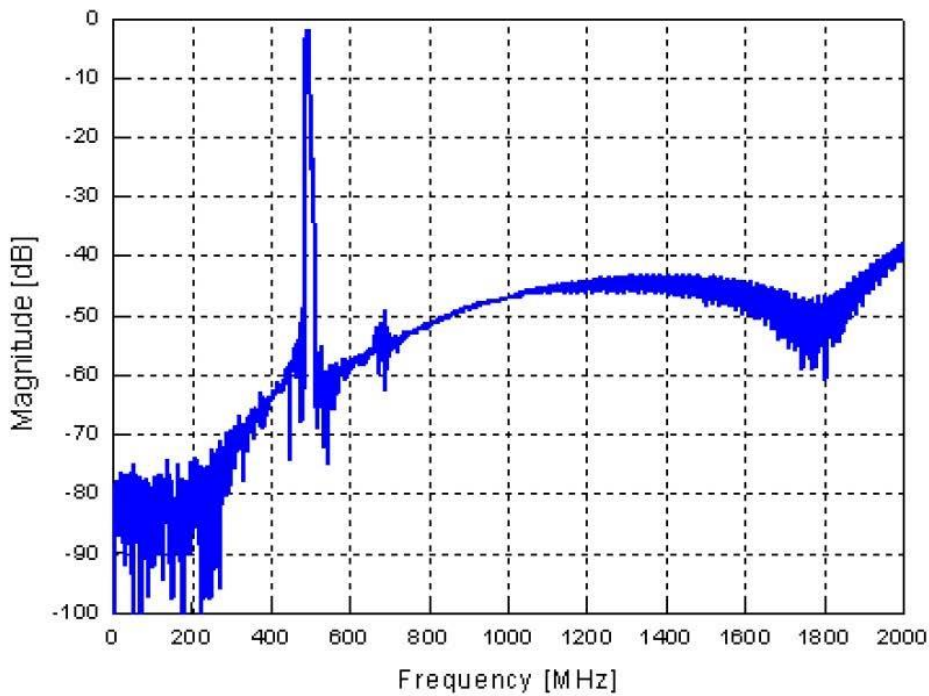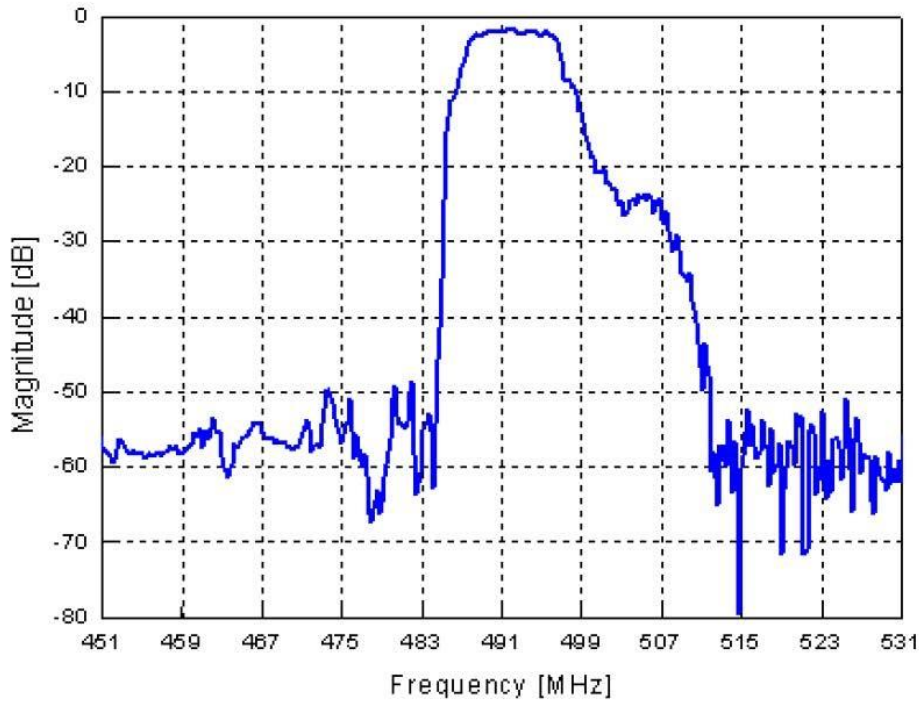



VSWR

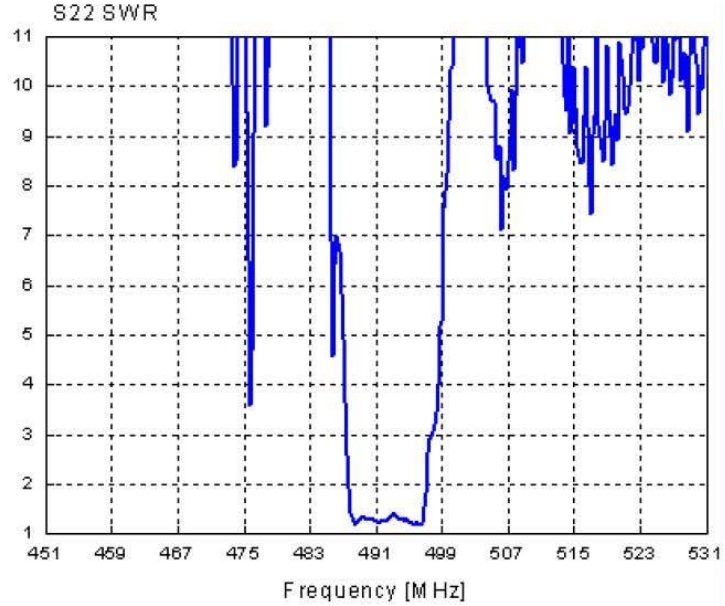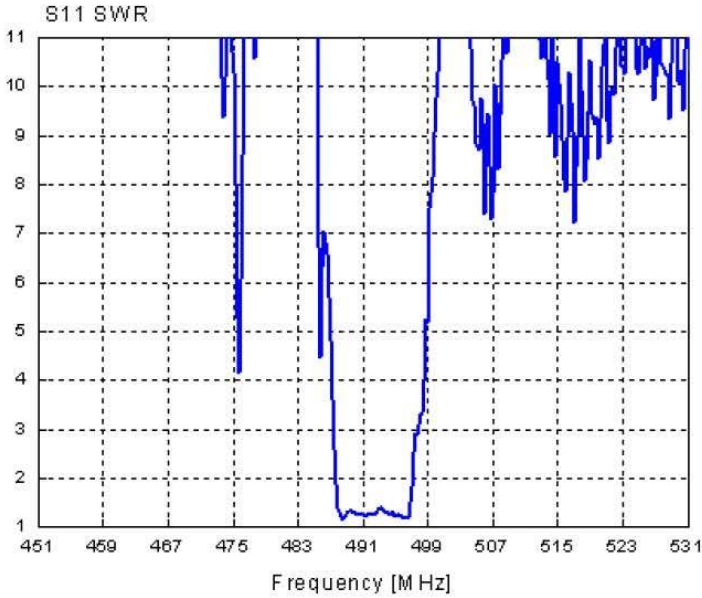

Smith Chart

