



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

**415-420 MHz / 425-430 MHz
Cavity Duplexer
Part Number: AD417-422D225**




<u>Characteristics</u>	<u>Band 1</u>	<u>Band 2</u>
Passband:	415-420 MHz	425-430 MHz
Bandwidth:	5 MHz	5 MHz
Passband Return Loss:	20 dB	20 dB
Passband Insertion Loss:	< 1.2 dB	< 1.2 dB
Passband Ripple:	0.2 dB	0.2 dB
Input / Output Impedance:	50 Ohms	50 Ohms
Isolation:	> 80 dB	> 80 dB
Power Handling:	100 Watts	100 Watts

<u>Mechanical</u>	
Mounting Method:	Threaded Mounting Holes
Connector Type:	N -Type (F)
Dimensions:	250 x 230 x 73 mm

<u>Environmental</u>	
Operating Temperature:	-40 to +70 deg.C
Storage Temperature:	-50 to +90 deg.C

Outline Drawing:

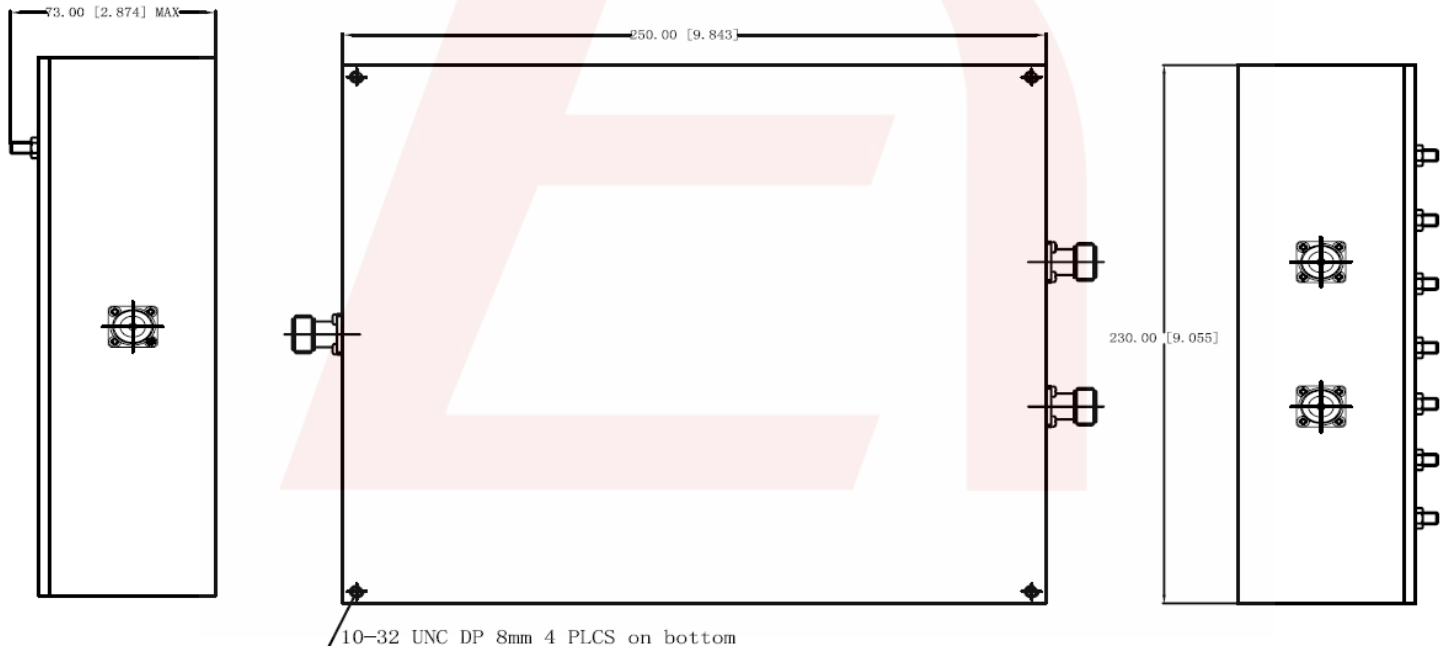

DS-D225-08202015-Rev0