



Electrical Specifications

Center Frequency: 100 MHz
3dB Bandwidth: 5 MHz
Passband: 97.5-102.5 MHz
Insertion Loss: 6 dB Max
Return Loss: 14 dB Min
Rejection: >50 dB @ 0-80 MHz
 >50 dB @ 120-1000 MHz


Mechanical

Connector Type: SMA (F)
Dimensions: 1.5 x 0.75 x 0.5 inches

Environmental

Operating Temperature: -40 to +70°
Shock: 10 G. 11 ms
Vibration: 10 G. 5 to 200 Hz

Outline Drawing:

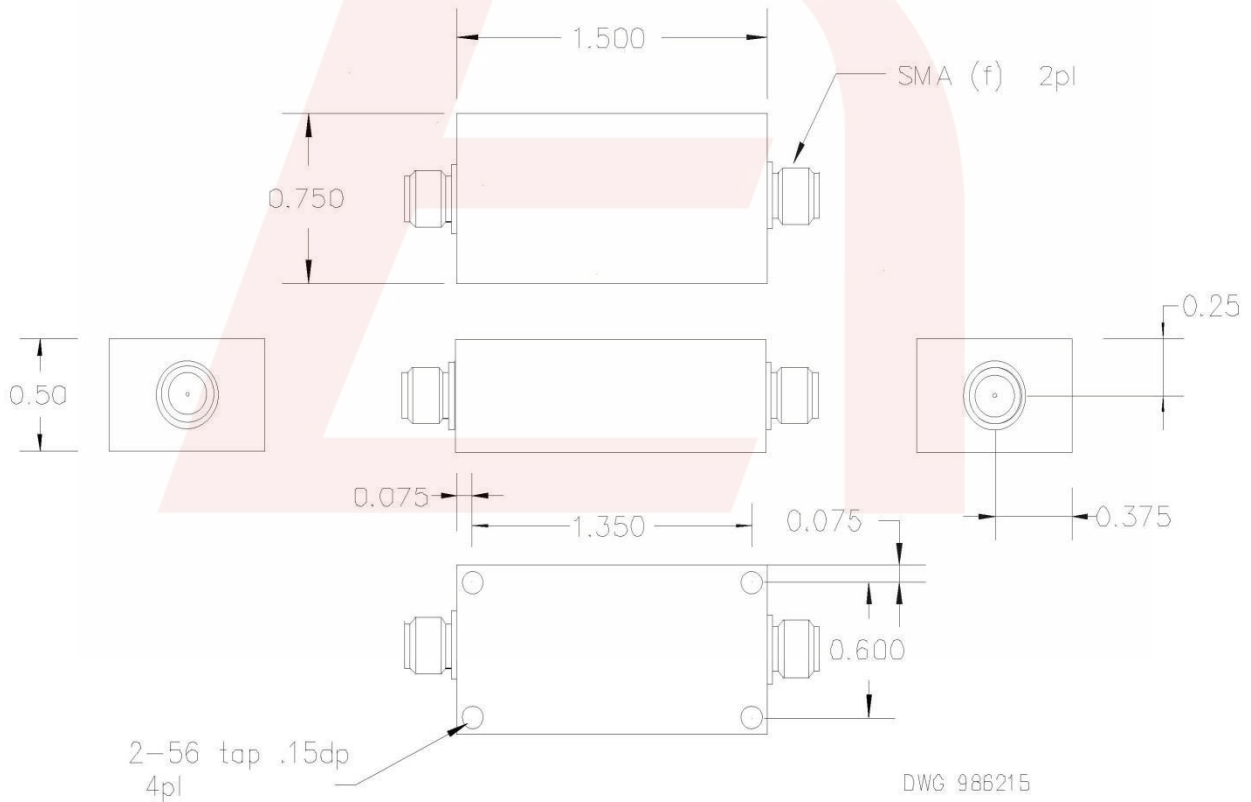



Response Plot:

