



Electrical specifications

Center Frequency: 1030 MHz
Bandwidth: 10 MHz
Return Loss: 18 dB Min
Insertion Loss: 5.0 dB max
Ripple in (BW): 0.5 dB max
Attenuation: 50 dB min at 990 MHz
Attenuation: 50 dB min at 1070 MHz
Power Handling: 3 Watt
Input / Output Impedance: 50 Ohms

Mechanical


Mounting Method: SMT
Dimensions: 32 x 17 x 7.5 mm

Environmental

Operating Temperature: -40 C to 80 C
Storage Temperature: -45 C to +85 C

This product is RoHs compliant.

Outline Drawing:

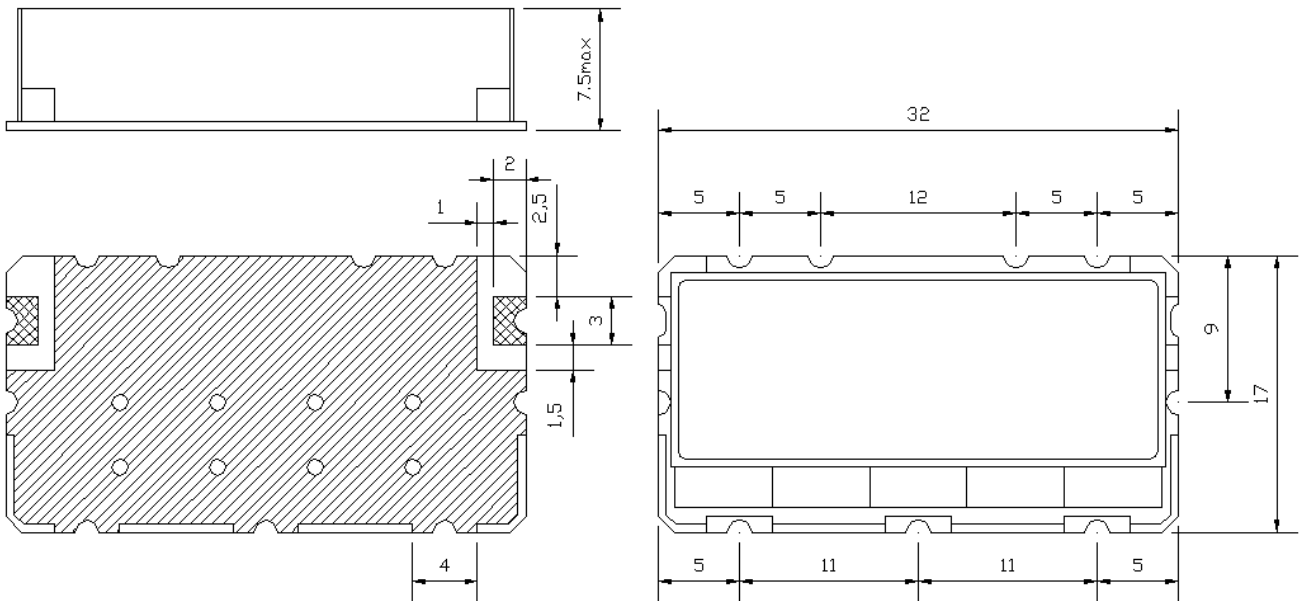

Unit:mm
Tolerance:±0,3