



Electrical Specifications

Notch Center Frequency: 1030 MHz
Notch Passband: 1023 – 1037 MHz
Insertion Loss in Passband: 3.0 dB Max
Passband Below Notch: DC – 1014 MHz
Passband Above Notch: 1106 – 3500 MHz
Notch Rejection: 45 dB Min
VSWR: 2.0:1 Max
Impedance: 50 Ohms In/Out
Power Handling: 20 W AVG, 400 W Peak


Mechanical

Connector Type: N-Type Female
Dimensions: 4.76 x 2.36 x 0.94 in.
121 x 60 x 24 mm

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +95°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200Hz

Outline Drawing:

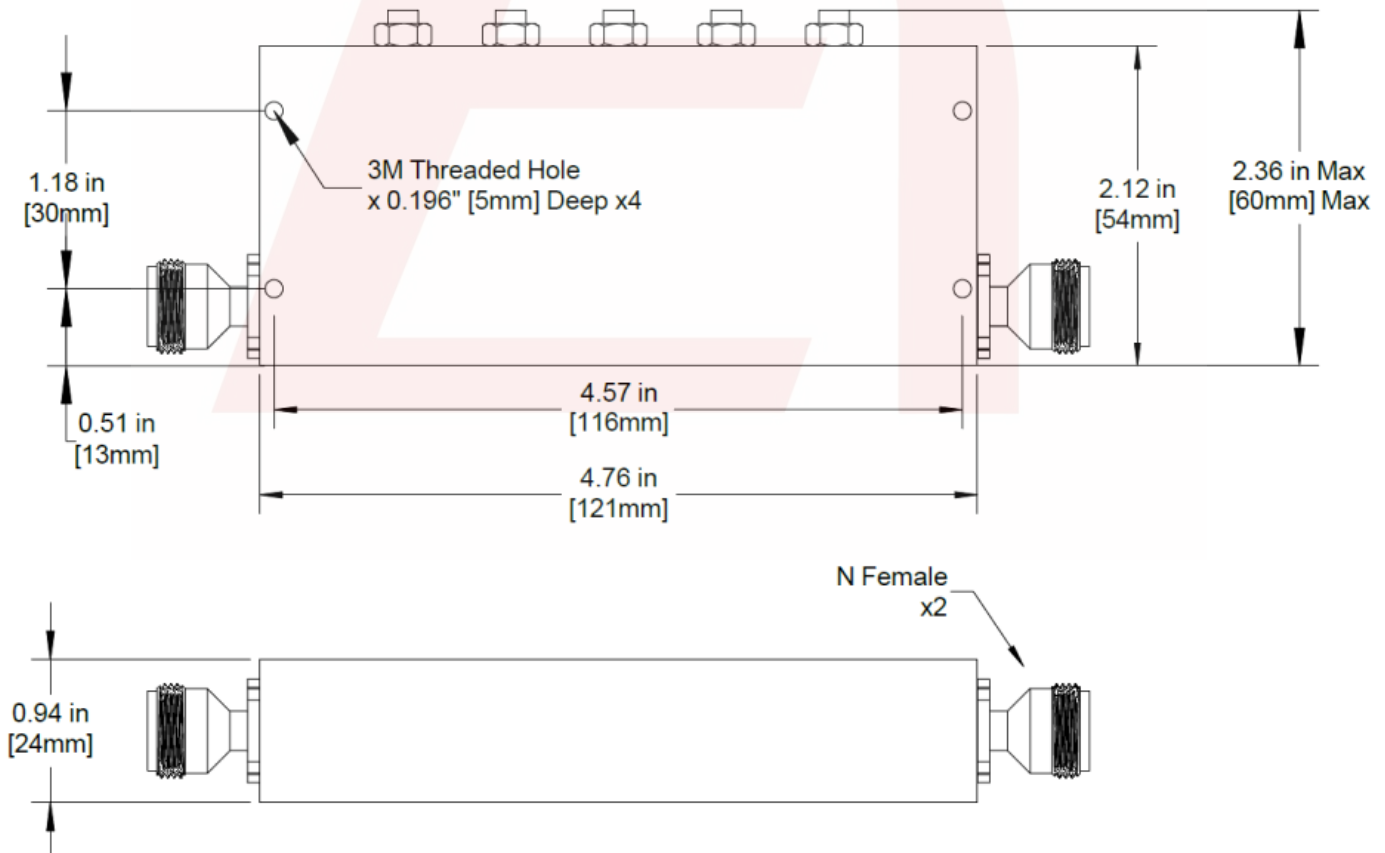

DS-N2269-08032023-Rev0