



Electrical specifications

Center Frequency: 1129.5MHz
Ins. Loss @ Center Frequency: 2.4dB
Passband: 1000-1259MHz
Passband Variation: ≤ 1.2 dB
VSWR over Passband: $\leq 1.6:1$
Rejection: ≥ 60 dB @ 629.5MHz
Rejection 2: ≥ 60 dB @ 1500-4500MHz
Rejection 3: ≥ 50 dB up to 12000MHz
Rejection 4: ≥ 40 dB up to 20000MHz
Impedance: 50 Ω


Mechanical

Mounting Method: Drop-in
Dimensions: 2.00" x 0.70" x 0.70"

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

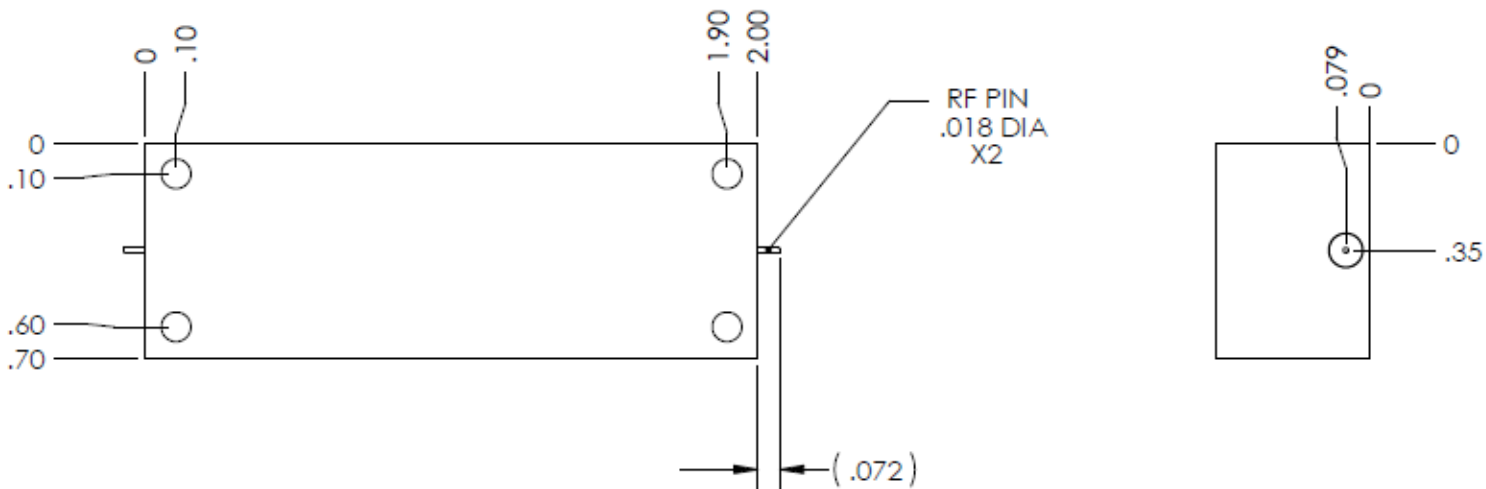



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1129.5MHz Bandpass Filter

Part Number: AE1129B11059



Plot:

