



Electrical specifications

Frequency Range: 14800 - 15200 MHz
Insertion Loss: 2.0 dB Max
Return Loss: 14 dB Min
Rejection: 30 dB min @ 14085 MHz
Rejection: 30 dB min @ 15915 MHz
Rejection: 40 dB min @ 13910 MHz
Rejection: 40 dB min @ 16090 MHz
Rejection: 60 dB min @ 13195 MHz
Rejection: 60 dB min @ 16775 MHz
Rejection: 80 dB min @ 11375 MHz
Rejection: 30 dB min @ 30000 MHz
Impedance: 50 Ohms In/out
Power Handling: 25W
Group Delay: 12 ns Max


Mechanical

Connector Type: 2.92mm Female
Mounting: Thru Mounting Hole
Dimensions With Mounting: 1.81 x 0.71 x 0.32 in

Environmental

Operating Temperature: -20 to +70° C
Storage Temperature: -55 to +85° C
Shock: 20G for 11ms half sine wave, 3 axis both directions
Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

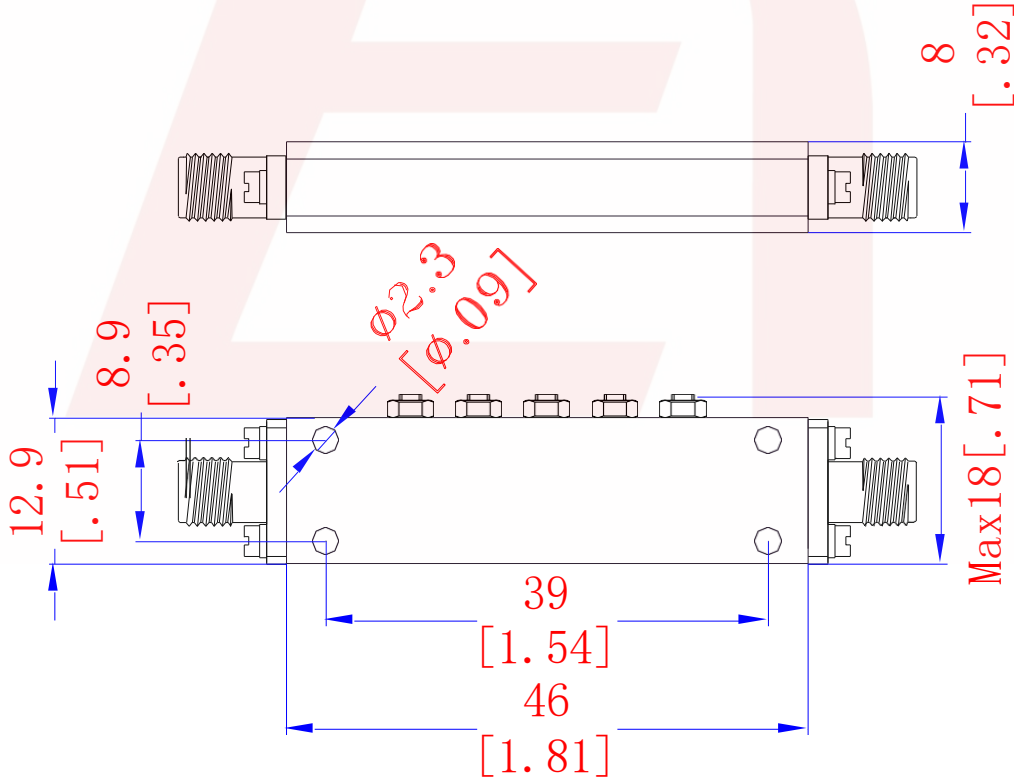

DS-B11164-2.92-02272024-Rev0