



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Preliminary Datasheet
16000 MHz Cavity Bandpass Filter
Part Number: AE16000B12188



Electrical specifications

Center Frequency: 15900 MHz
Bandwidth: 200 MHz
Passband: 15900 – 16100 MHz
Insertion Loss in Passband: 2.0 dB Max
Return Loss in Passband: 14 dB Min
Rejection: 50 dB Min @ 15500 MHz
50 dB Min @ 16500 MHz
60 dB Min @ 25600 MHz
Impedance: 50 Ohms In/Out
Power Handling: 30 dBm

Mechanical

Connector Type: SMA (Female)
Dimensions: Approx. 2.15 x 0.5 x 0.5 in.

Environmental

Operating Temperature: -45 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 2000 Hz

Outline Drawing:

Approximate size is 2.15 x 0.5 x 0.5 inches.


DS-B12188-10112024-Rev0



Preliminary Datasheet
16000 MHz Cavity Bandpass Filter
Part Number: AE16000B12188



Simulation Plot:

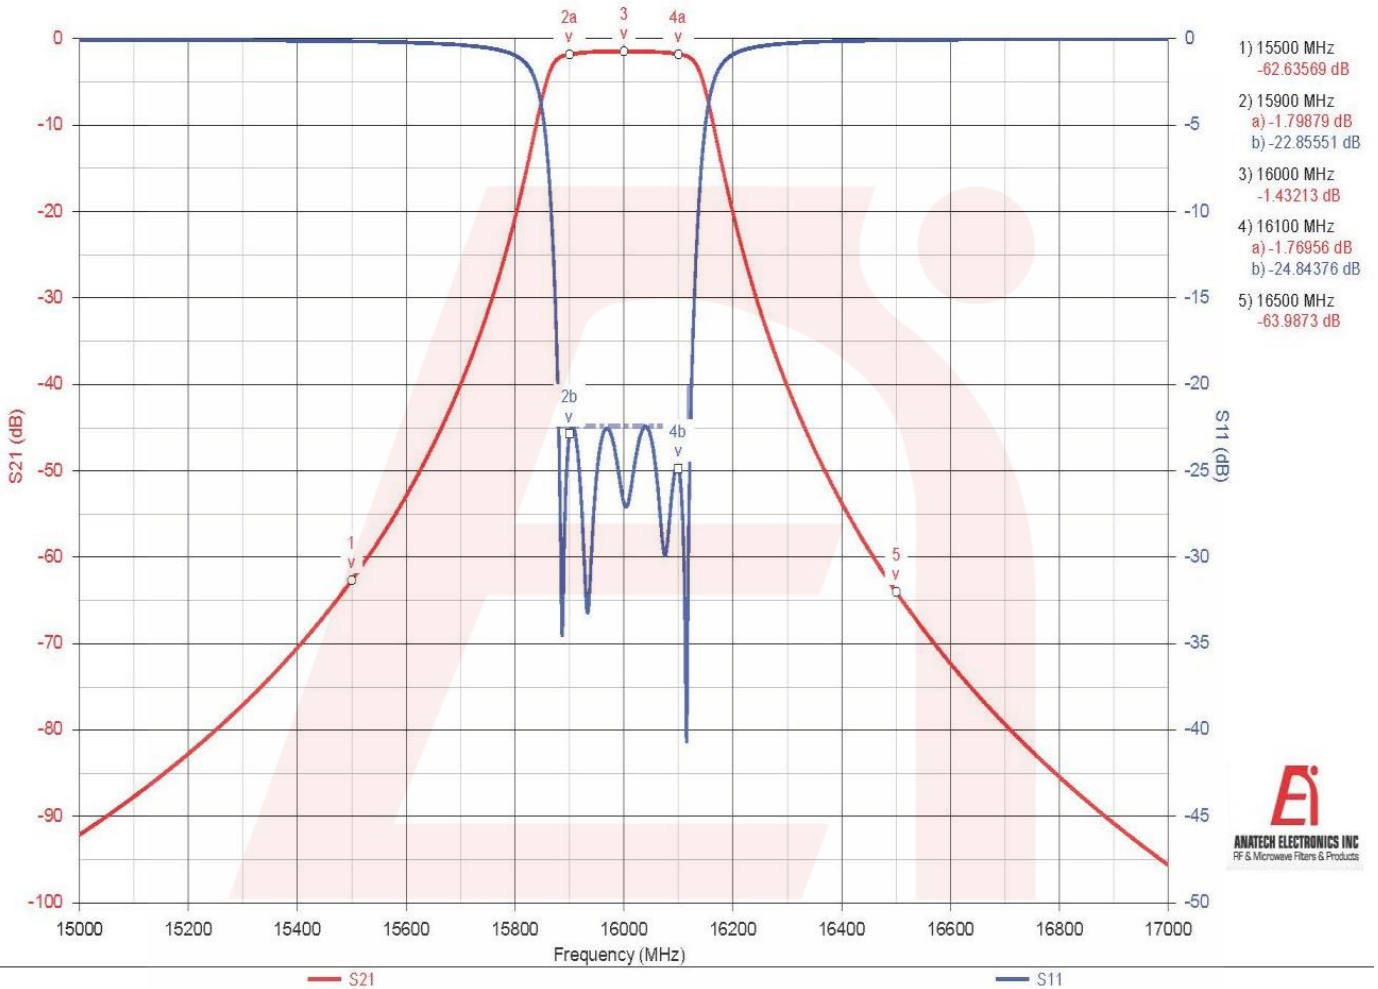

Note: This is a simulation Plot. Actual response plot might differ.