



Electrical Specifications

Center Frequency: 1750 MHz
Bandwidth: 35 MHz
Pass Band: 1732.5-1767.5 MHz
Insertion Loss: 1.0 dB Max
VSWR: 1.30:1 Max
Rejection: ≥60 dB @ 1750 ± 60 MHz
Impedance: 50 Ohms In/Out
Power Handling : 100 Watts


Mechanical

Connector Type: SMA (F)
Dimensions: 3.51 x 2.40 x 1.69 Inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

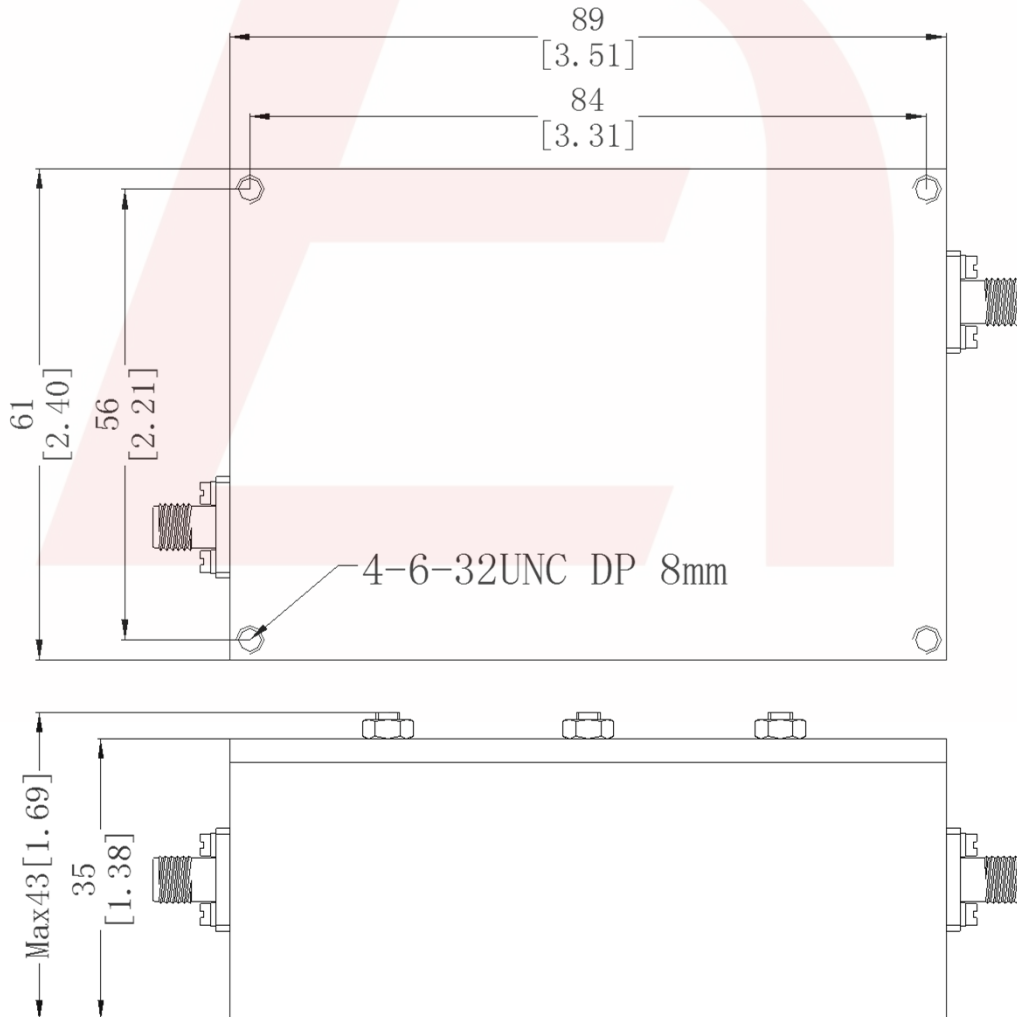

DS-B11251-03152018-Rev0