


Characteristics	Low Band	High Band
Passband:	1920 - 1980 MHz	2110 - 2170 MHz
Passband Insertion Loss:	2.0 dB Max	2.0 dB Max
Passband Return Loss:	12 dB Min	12 dB Min
Passband Ripple:	0.50 dB Max	0.50 dB Max
Rejection:	45 dB Min @ 2110 - 2170 MHz	50 dB Min @ 1920 - 1980 MHz
Input / Output Impedance:	50 Ohms	50 Ohms
Power Handling:	3 W	3 W

Mechanical	
Mounting Method:	SMT
Dimensions:	9.93 x 5.45 x 1.90 mm

Environmental	
Operating Temperature:	-55°C to +85°C
Storage Temperature:	-55°C to +100°C

This product is RoHS Compliant.

Outline Drawing:

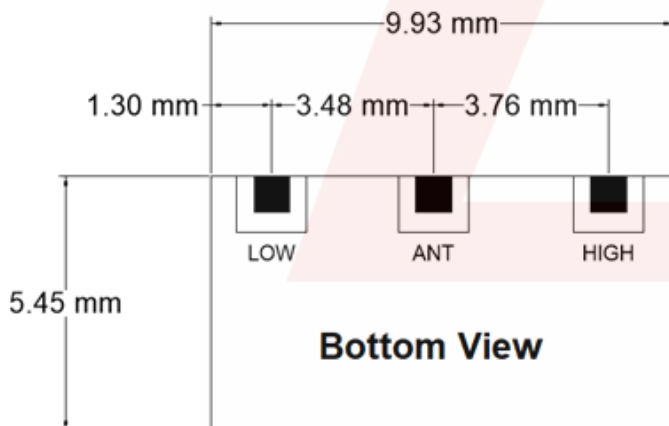

PVB Footprint:

