



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2200 MHz LC Lowpass
Part Number: AE2200L9289



Cutoff Frequency: 2200 MHz
Passband: DC - 2200 MHz
Insertion Loss: 6.0 dB Max
Return Loss: 14 dB Min
Rejection: 70 dB Min @ 3400 – 6600 MHz
Power Handling: 10 Watt


Mechanical

Mounting: Threaded Hole
Connector Type: SMA Female
Dimensions: 1.25 x 0.65 x 0.50 inches

Environmental

Operating Temperature: -20°C to +70°C
Storage Temperature: -40°C to +85°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200Hz

Outline Drawing:

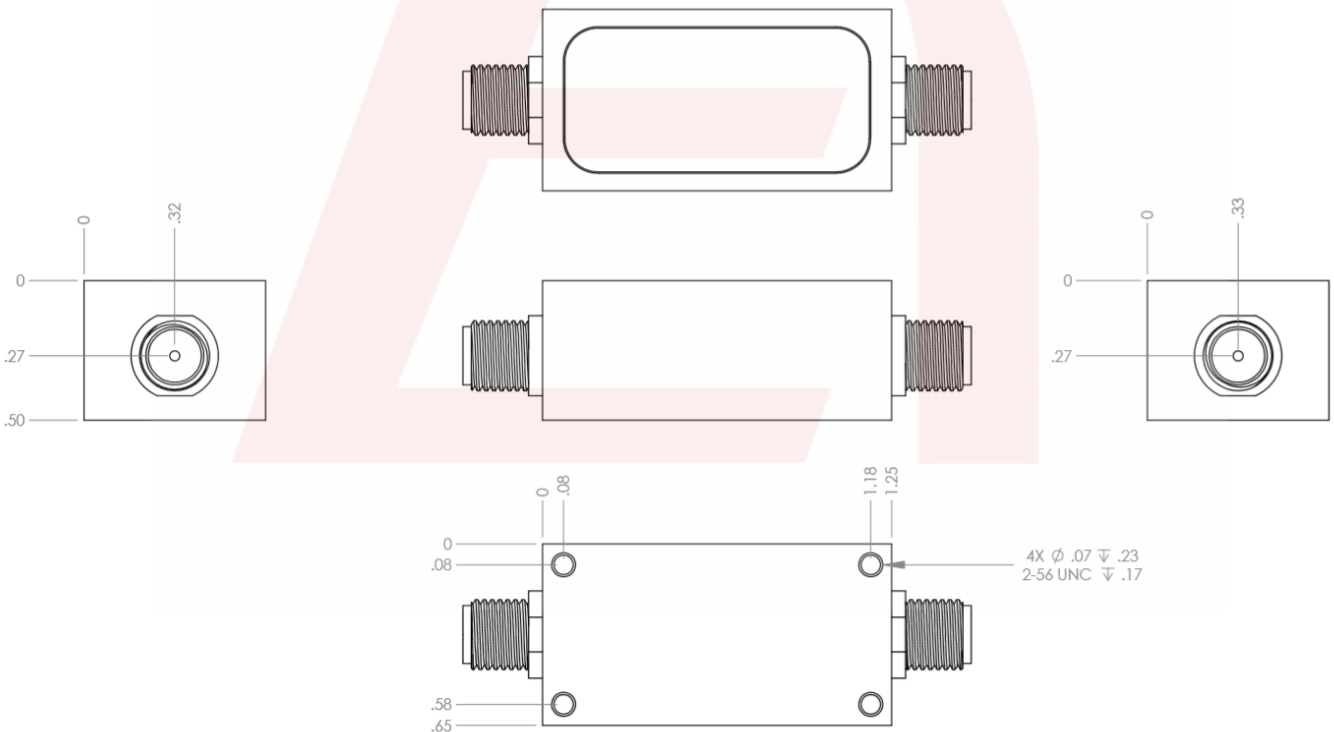

DS-L9289-07292022-Rev0