



Electrical specifications

Center Frequency: 2250 MHz
Bandwidth: ± 350 MHz
VSWR: 1.4 : 1 min
Insertion Loss: 2.0 dB max
Ripple in (BW): 0.5 dB max
Attenuation: 35dBc min at 1400MHz
Attenuation: 35dBc min at 4000MHz
Power Handling: 1 Watt
Input / Output Impedance: 50 Ohms

Mechanical


Mounting Method: SMT
Dimensions: 26.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -40 C to 85 C
Storage Temperature: -50 C to +90 C

This product is RoHs compliant.

Outline Drawing:

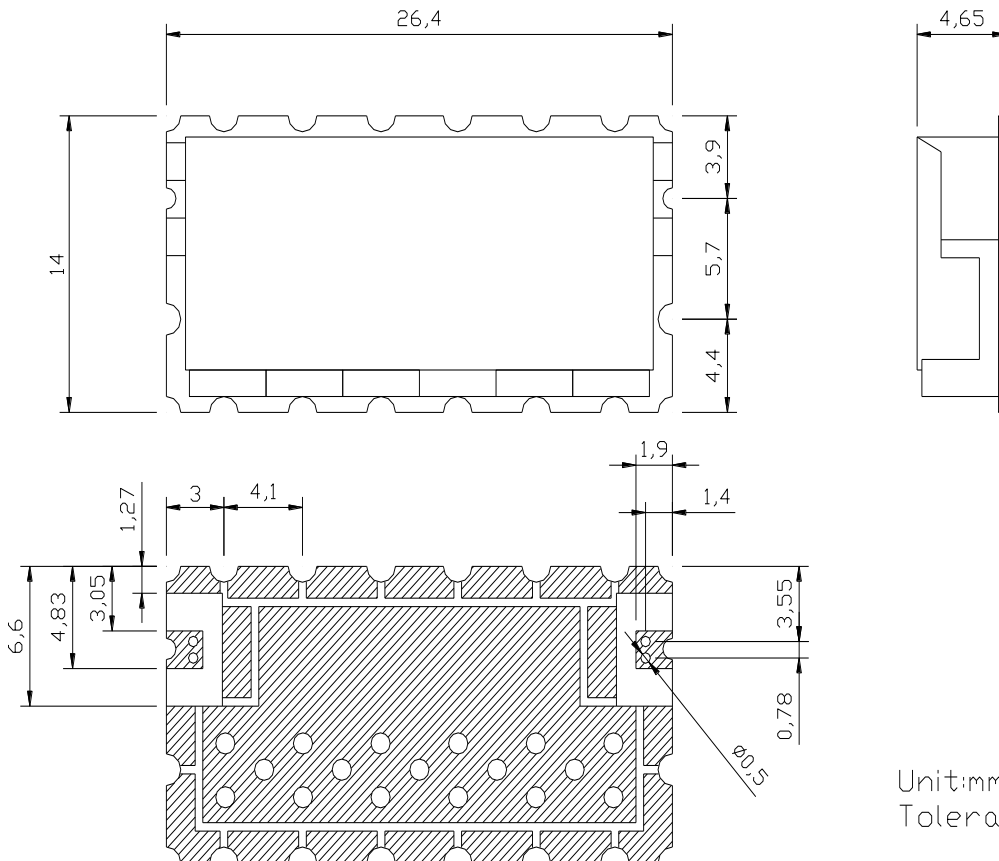

Unit:mm
Tolerance: ± 0.3



2250 MHz Ceramic Bandpass Filter

Part Number: AE2250CB1823

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

