



Electrical specifications

Cutoff Freq (Fc): 2820 MHz
Passband: 0-2820 MHz
Insertion Loss over Passband: 1.0 dB Max
Return Loss over Passband: 14 dB Min
Ripple: 0.1 dB Max
Rejection: >40 dB @ 3600-7000 MHz
Impedance: 50 Ohms In/Out
Power Handling: 10 W CW


Mechanical

Connector Type: SMA (F)
Dimensions: 2 x 0.38 x 0.38 Inches

Environmental

Operating Temperature: -40 to +75° C
Storage Temperature: -50 to +90° C

Outline Drawing:

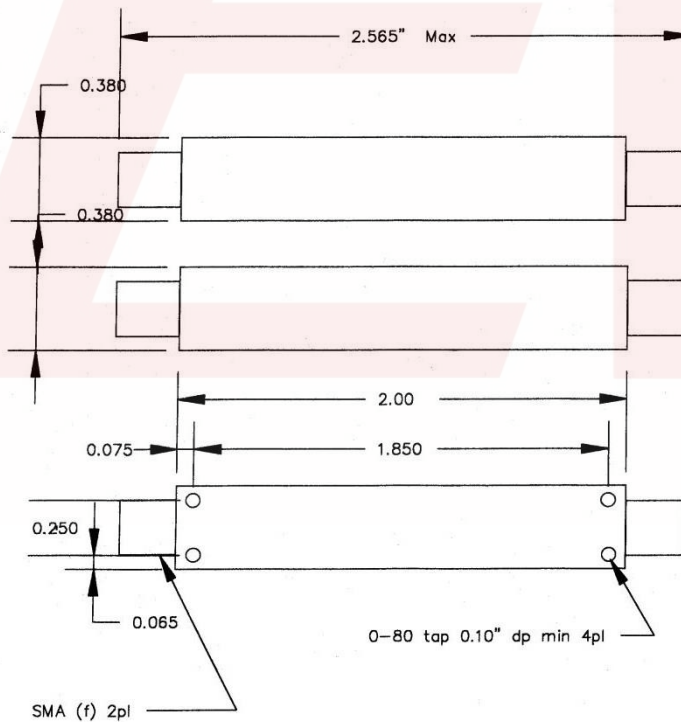


986934 ajs 6/12/02
Outline Drawing
Anatech Electronics Inc.



Response Plot:

3/3/2021 10:21:40 AM

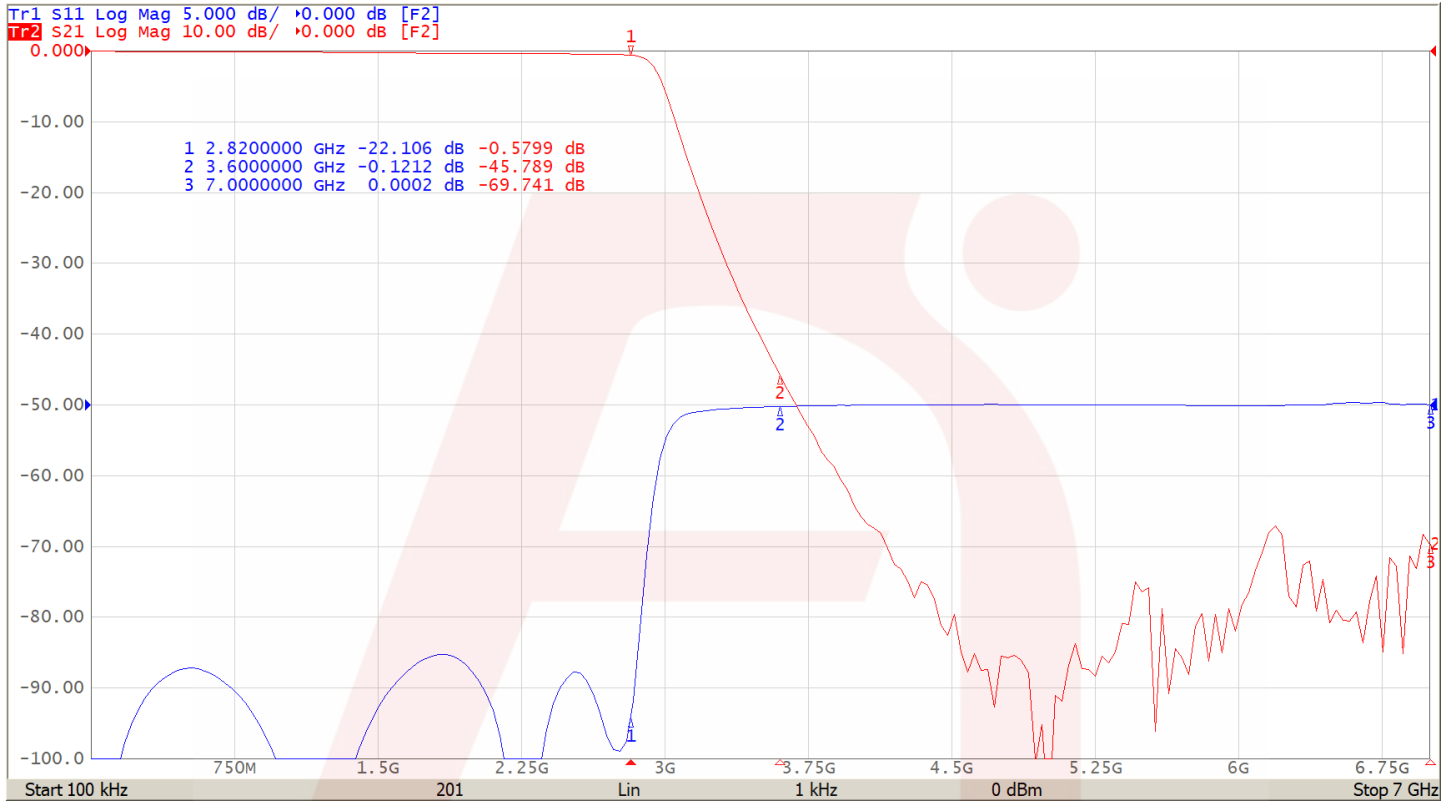

DS-L8859-02092015-Rev1