



Electrical Specifications

Center Frequency: 370 MHz
Bandwidth: 60 MHz
Passband (PB): 340 – 400 MHz
Insertion Loss: 1.0 dB Max
Return Loss: 15 dB Min
Rejection: 47 dB Min @ 280 MHz
60 dB Min @ 630 MHz
Impedance: 50 ohms In/Out
Power Handling: 20 W


Mechanical

Connector Type: SMA Female
Dimensions: 2.71 x 2.51 x 0.77 in.

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +95°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 Hz


Outline Drawing:

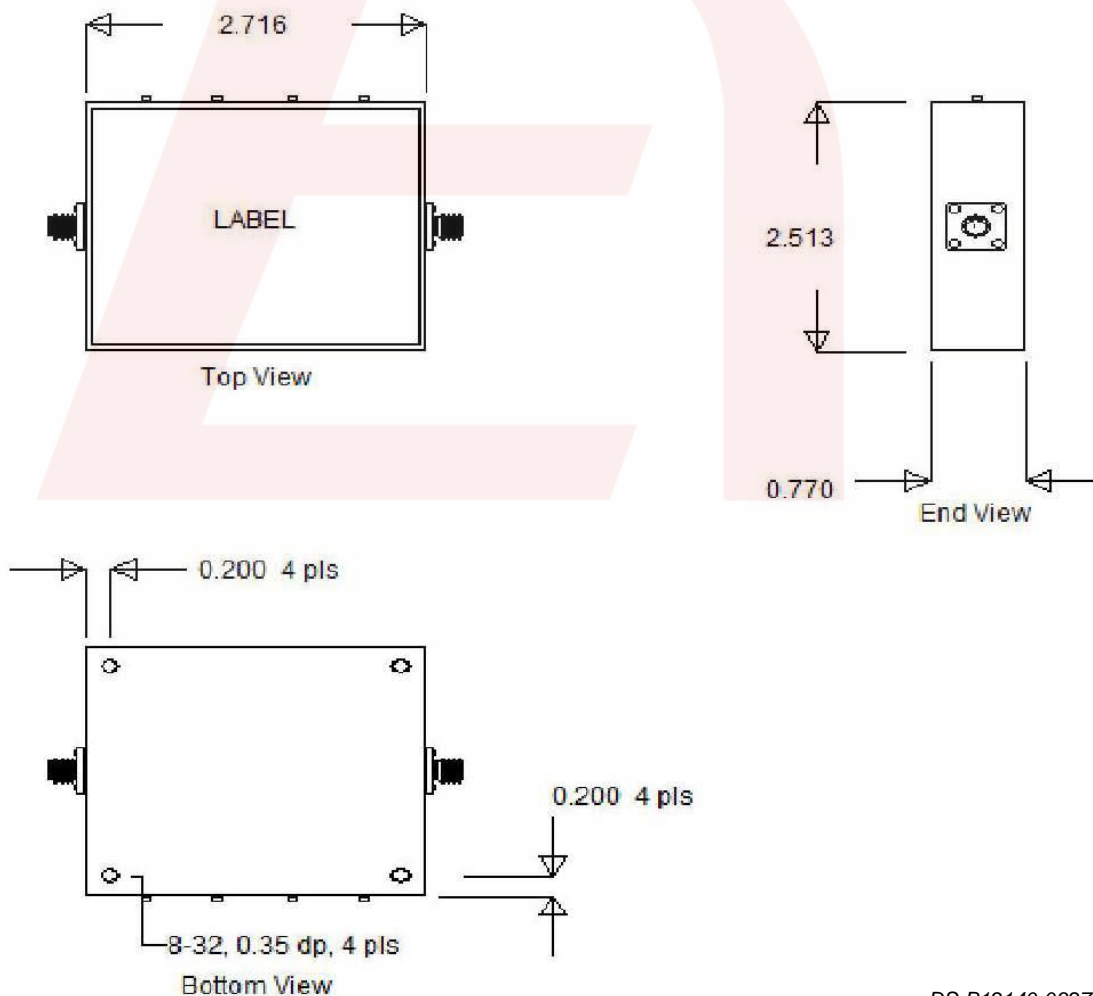

DS-B12140-03272024-Rev0



Simulated Plot:

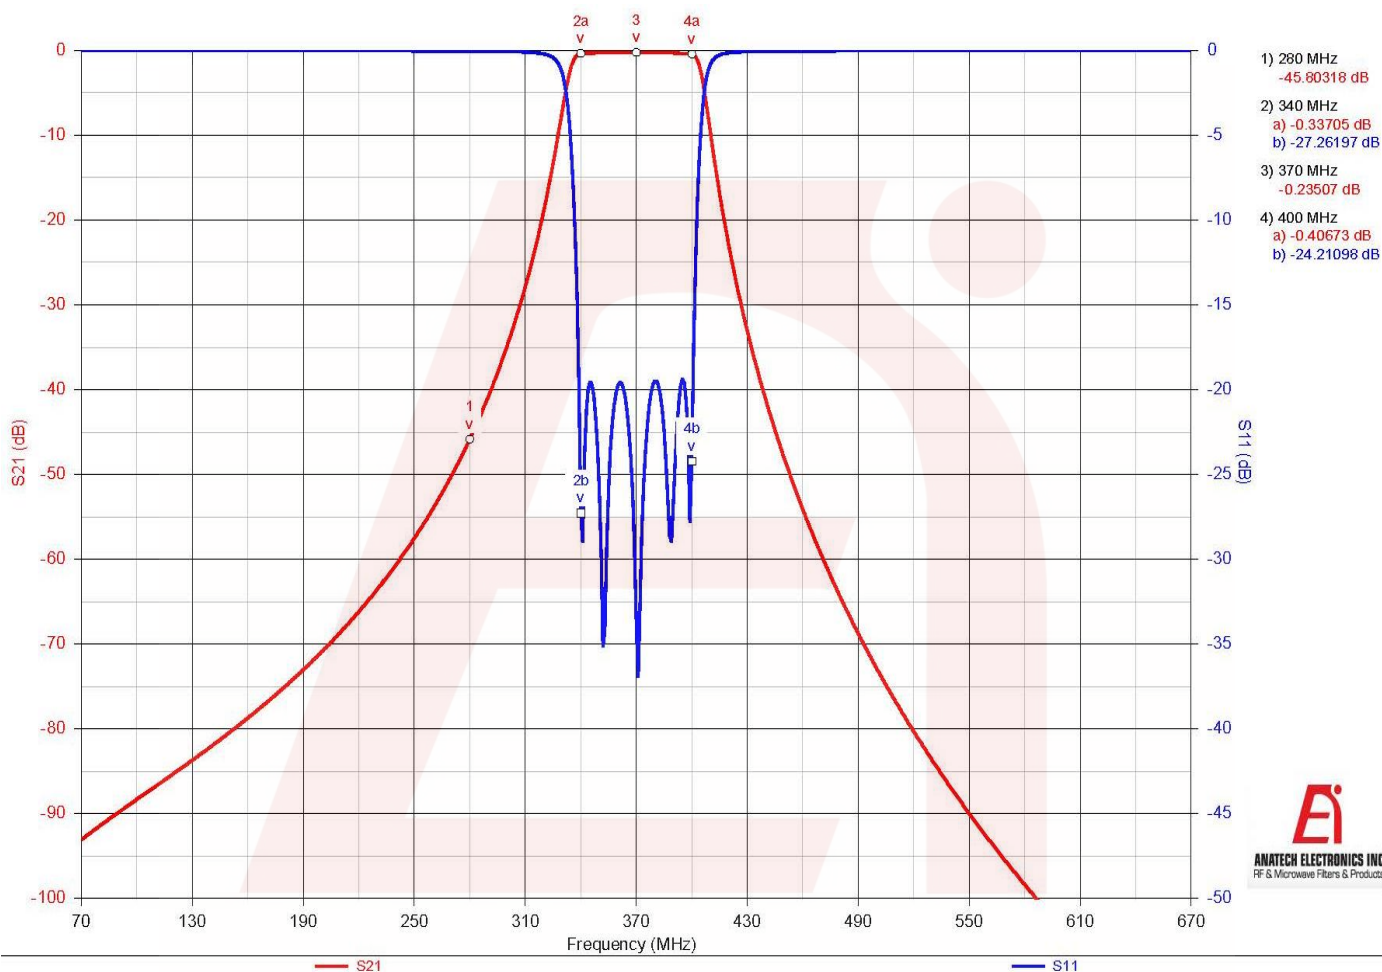

Note: This is a simulation plot. Actual results may differ.