



Electrical Specifications

Center Frequency: 410 MHz
Ripple in Passband: 0.5 dB Max
Insertion loss: 3 dB Max @ 410 MHz
Return loss: 14 dB Min
Rejection: @ 510MHz
Rejection: @ 605MHz
Power Handling: 5 W CW


Mechanical

Mounting Method: Surface Mount
Connector Type: SMT

Environmental

Operating Temperature: -40°C to +85°C
Storage Temperature: -55°C to +95°C

Outline Drawing:

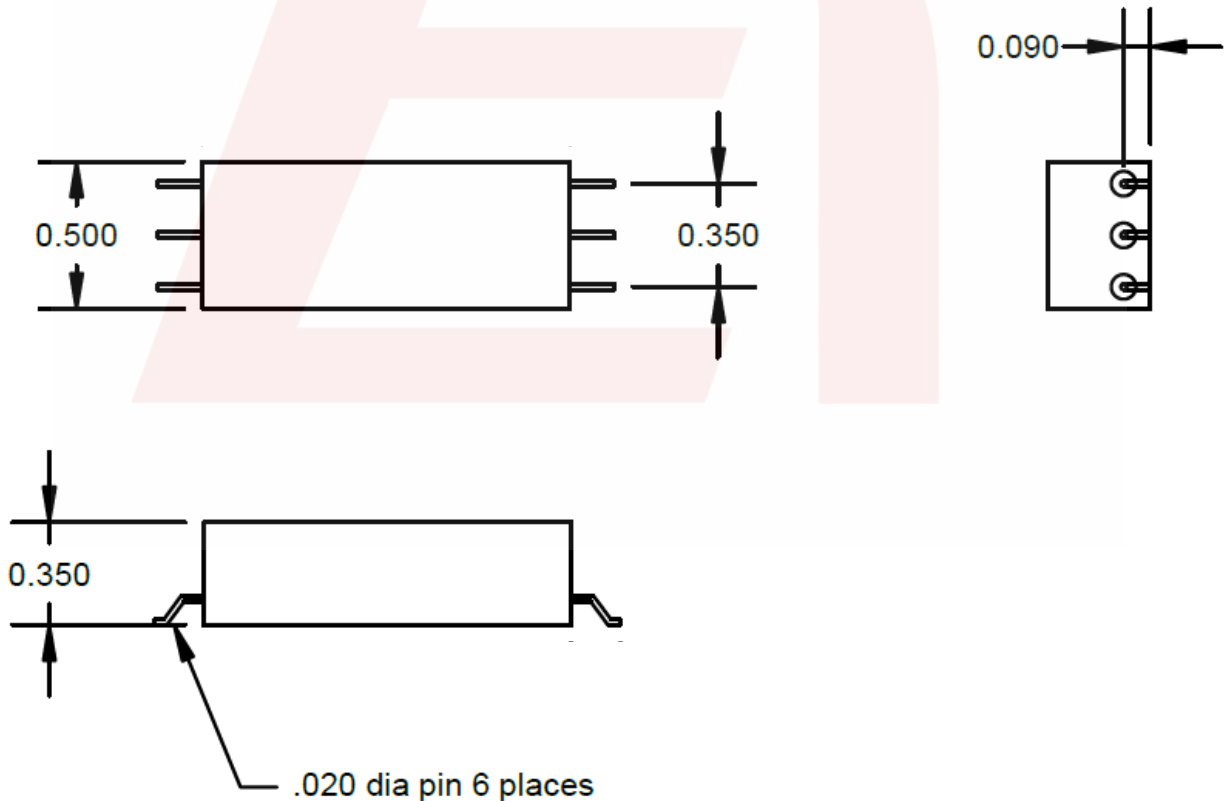



Response Plot:

