



Electrical Specifications

Passband: DC – 6000 MHz
Insertion loss: 1.0 dB Max
VSWR: 1.8 Max
Rejection: 70 dB Min @ 8000 - 12000MHz
Power Handling: 100 W Avg.
Impedance: 50 Ω


Mechanical

Connector Type: N-Type Female
Dimensions: 3.34 x 1.02 x 0.708 Inches

Environmental

Operating Temperature: -25 to +65 C
Storage Temperature: -45 to +85° C
Shock: 20 G. 11 ms
Vibration: 10 G. 5 to 200 Hz

Outline Drawing:

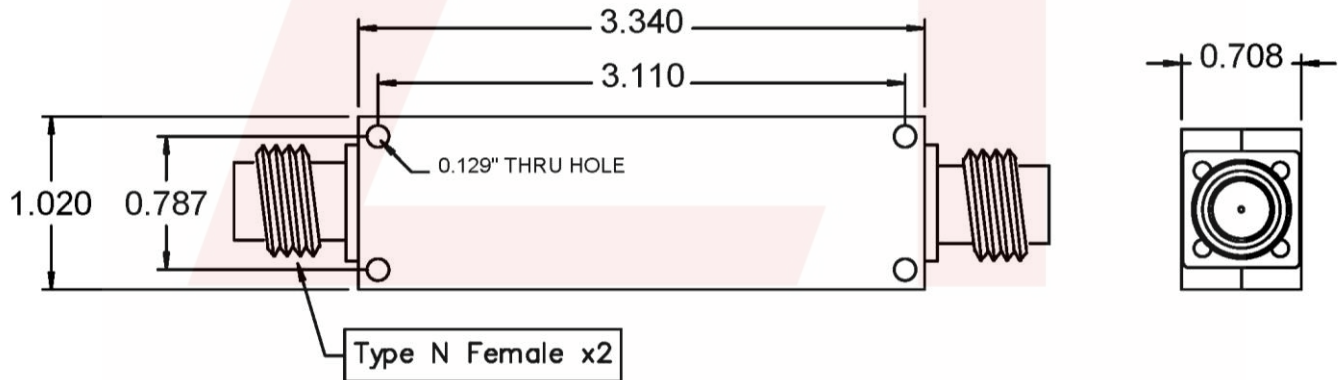



Response Plot:

