



Electrical

Center Frequency: 70 MHz
3.0 dB Relative Bandwidth: $F_c \pm 35$ kHz
Min 60.0 dB Rejection: $F_c \pm 70.0$ kHz
Max Ultimate Attenuation 60.0 dB
Min Spurs $F_c \pm 70$ kHz to $F_c \pm 2000$ kHz:
 50.0 dB Min / 60.0 dB Goal
Min Ripple, Peak-to-Valley: 1.0 dB
Max Insertion Loss: 10.0 dB
Max Termination Impedances:
 Source: 50 Ohms
 Load: 50 Ohms

Mechanical


Mounting Style: PC Mount
Dimensions: 2.25 x 0.75 x 0.44 in.

Environmental

Operating Temperature: 0°C - +70°C
Non-Operating: -54°C to +85°C
Shock: 100 G. Max 11+/q 1 msec 1/2 sine

*Designed to meet, not tested. Units encapsulated with foam

Outline Drawing:

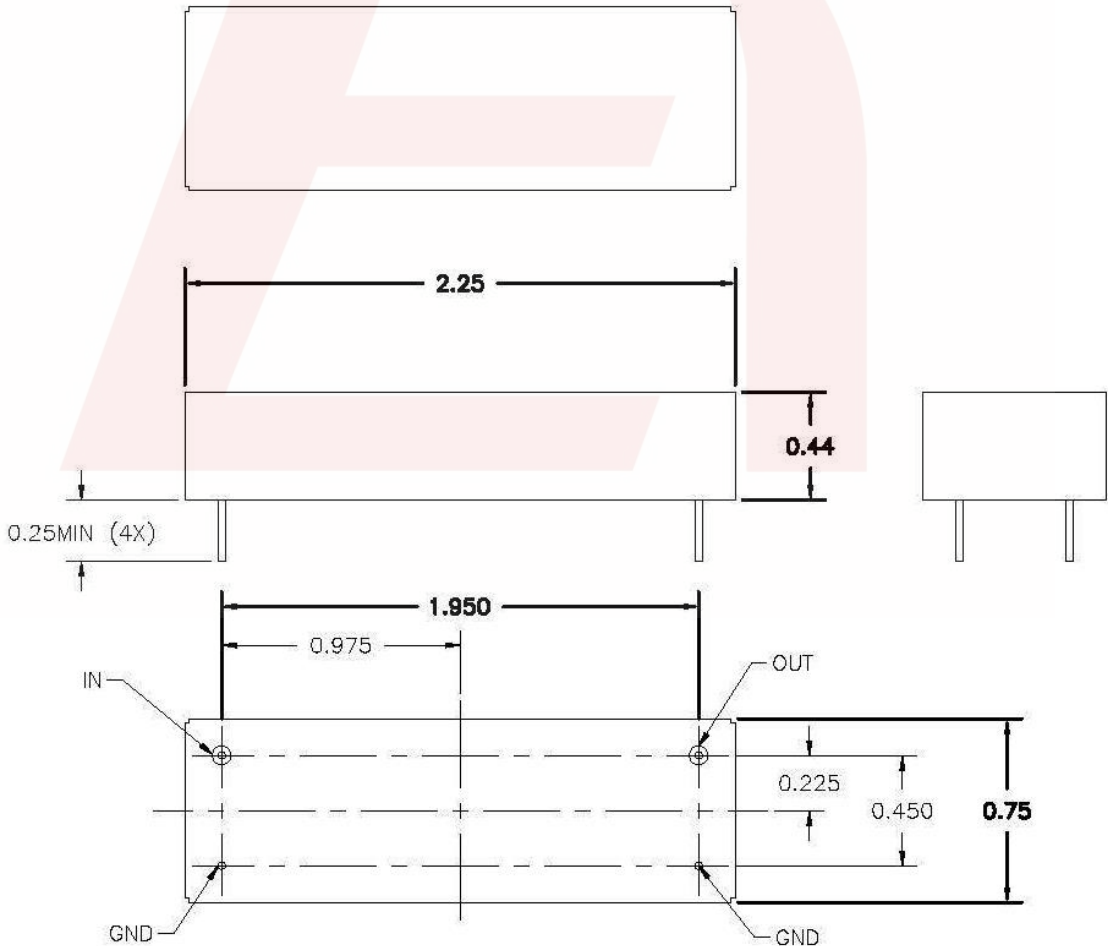


DS-CR371-11062023-Rev0




Response Plot:

Passband Response:

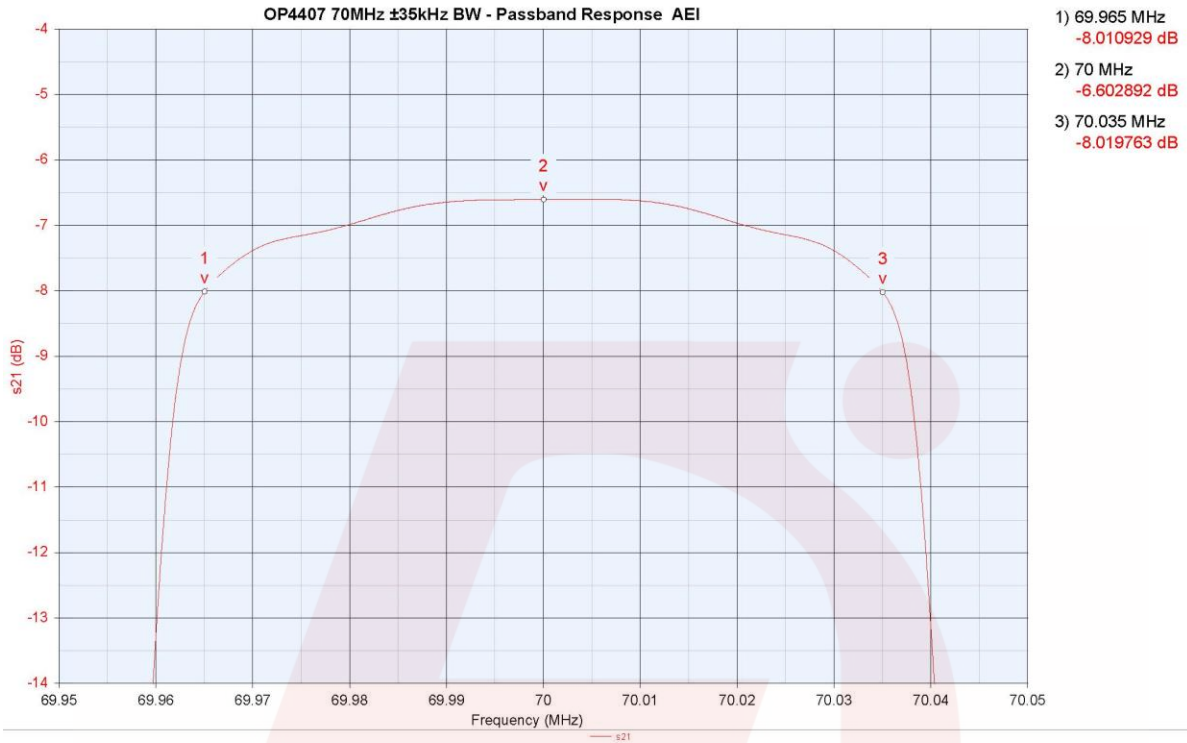

Stopband Response:

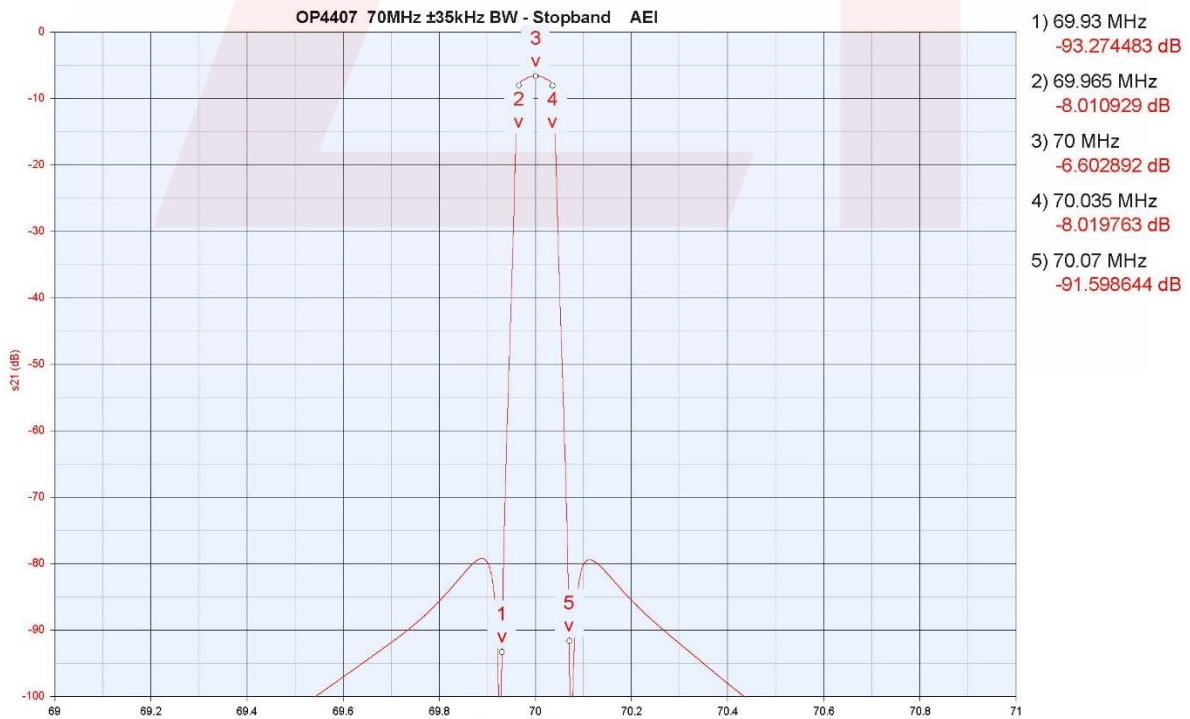

DS-CR371-11062023-Rev0