



Electrical specifications

Passband 1: 100-600MHz
Passband 2: 850-2500MHz
Insertion Loss over Passband 1: ≤ 0.75 dB
Rejection Loss over Passband 2: ≤ 0.75 dB
Rejection: @650-800 < 40dB
 (goal=640-810MHz 50dB)
Power: 100W


Mechanical

Mounting Method: 6-32 UNC
Connector Type: N-type(F)/N-Type(M)
Dimensions: 8.07" x 4.50" x 1.13" in.

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

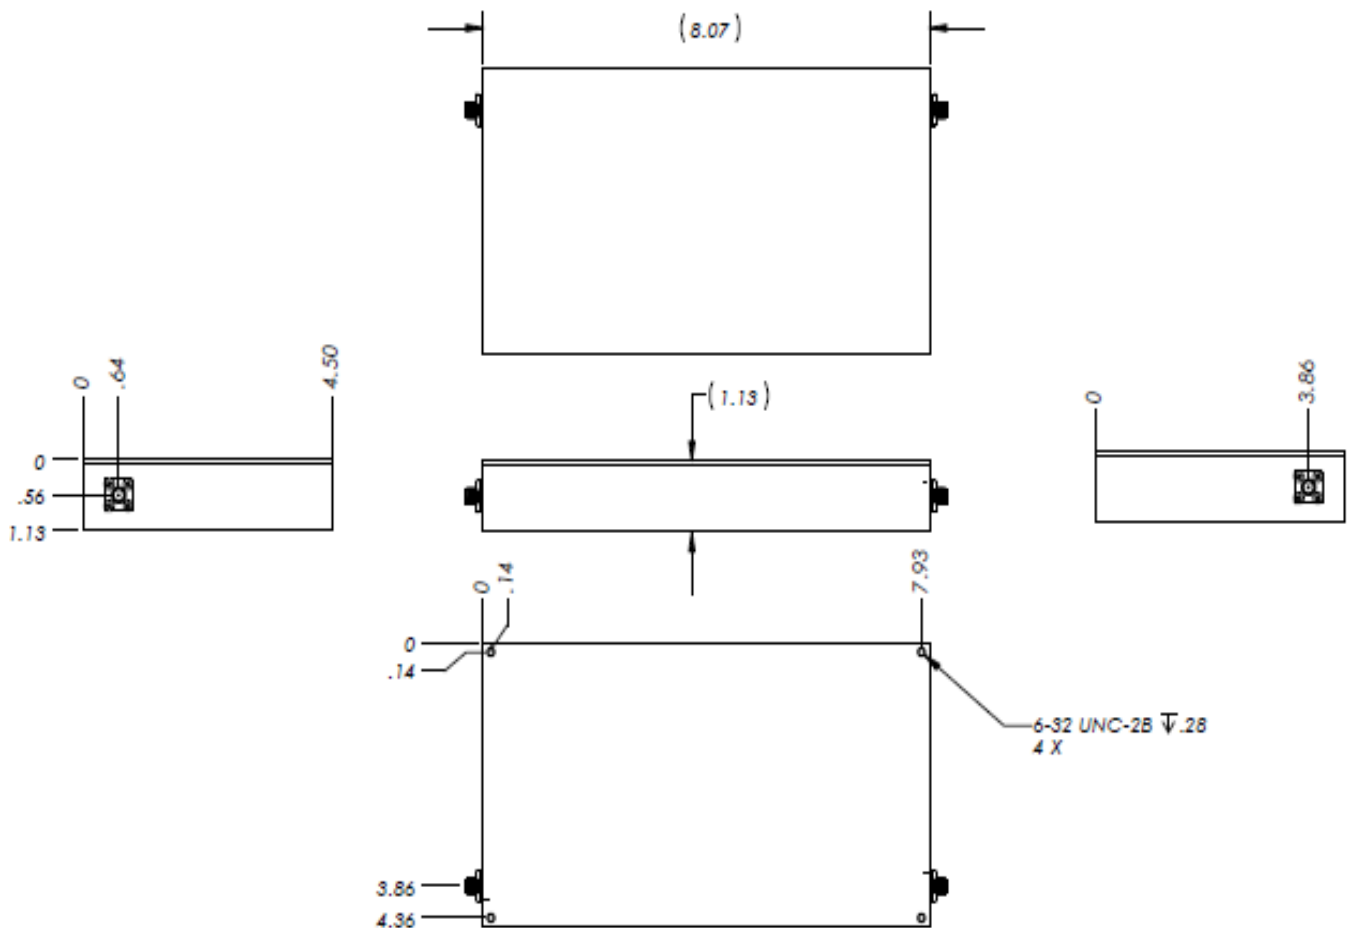



Response Plot:

