



Electrical Specifications

Center Frequency: 729 MHz
3dB Bandwidth: 40 MHz Min
Passband: 709-749 MHz
Insertion Loss: <1.0 dB
Ripple: <0.1 dB Max
Return Loss: >14 dB Min
Rejection: >65 dB @ 0-430 MHz


Mechanical

Mounting Method: SMT
Dimensions: 0.5 x 0.5 x 0.35 inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -55 to +95° C

Outline Drawing:

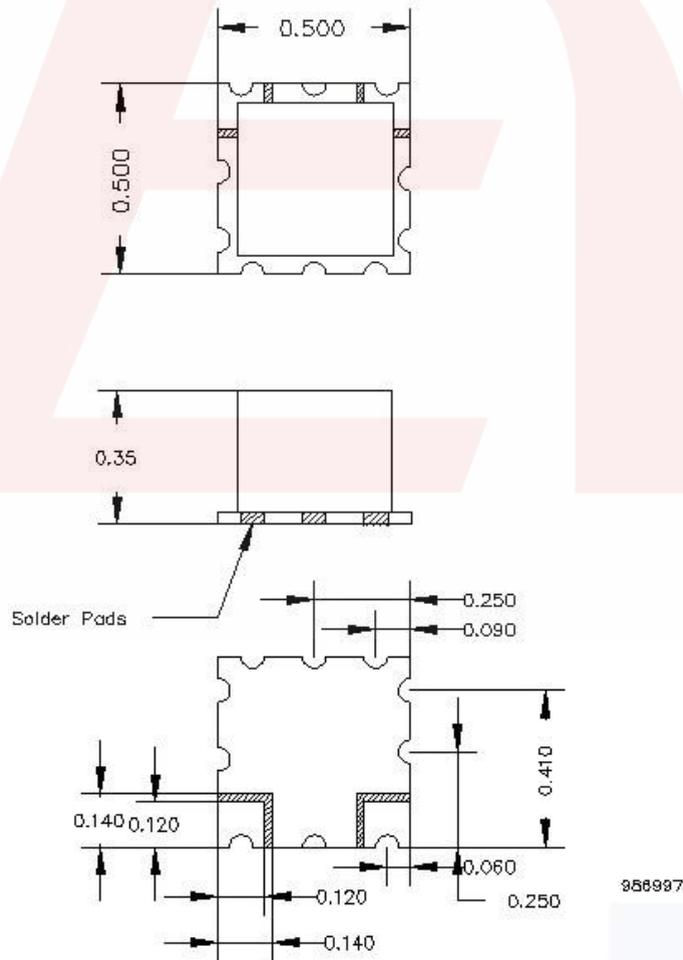

DS-B6742-02092015-Rev1



Response Plot:

