



Electrical Specifications

Center Frequency: 7875 MHz
Passband: 7800 – 7950 MHz
Insertion Loss: 0.5 dB Max.
Return Loss: 15 dB Min
Rejection: 25 dB Min @ 7610 MHz
Rejection: 25 dB Min @ 8130 MHz
Impedance: 50 Ohms In/Out
Power Handling: 20 W CW Max


Mechanical

Connector Type: SMA Female
Dimensions: 2.78 x 1.56 x 0.79 in.
 70.5 x 39.5 x 20 mm

Environmental

Operating Temperature: -40°C to +70°C
Storage Temperature: -55°C to +85°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200Hz

Outline Drawing:

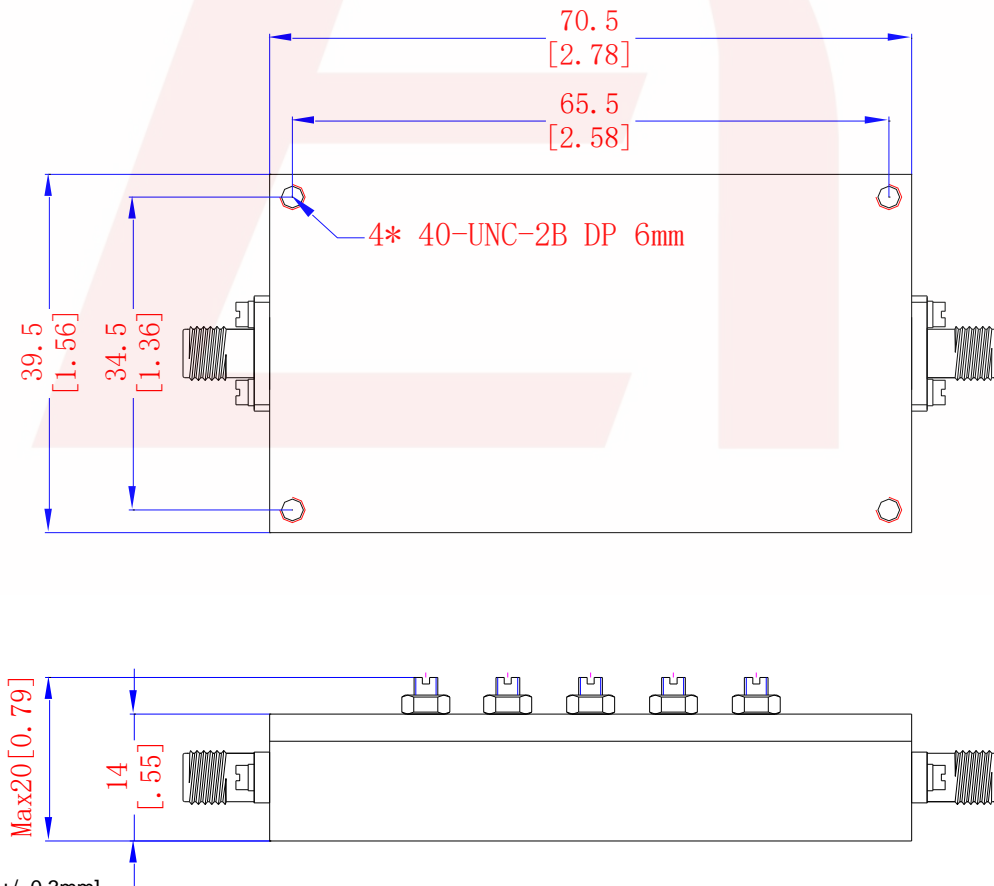

Tolerance: +/-0.01 inches [+/- 0.3mm]

Angles: +/- 1 Deg.


*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

DS-B12041-09282023-Rev0



Simulated Plot:

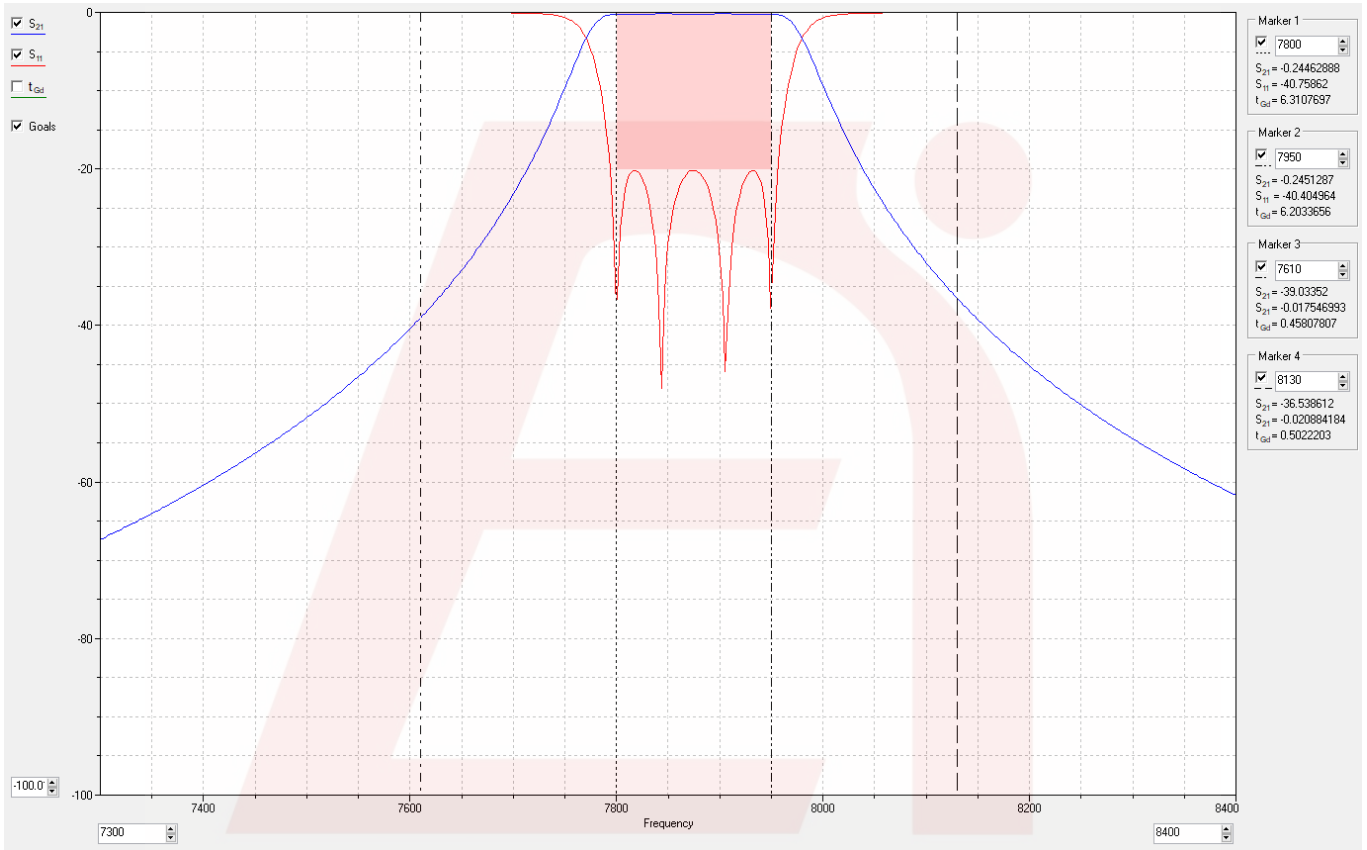

Note: This is a simulation Plot. Actual response plot might differ.