



Electrical specifications

Center Frequency: 860 MHz
Bandwidth: 30 MHz
Passband: 845 - 875 MHz
Passband Insertion Loss: 3.0 dB max
Return Loss: 18 dB Min
Rejection: 30 dB Min @ 800 – 840 MHz
Rejection 2: 30 dB Min @ 880 – 900 MHz
Input / Output Impedance: 50 Ohms
Power Handling: 50 W max

Mechanical


Mounting Method: 6-32 Mounting Screws
Connector Type: SMA (F)
Dimensions: 4.61 x 2.40 x 2.29 in.

Environmental

Operating Temperature: -20°C to +60°C
Storage Temperature: -40°C to +85°C

This product is RoHS compliant.

Outline Drawing:

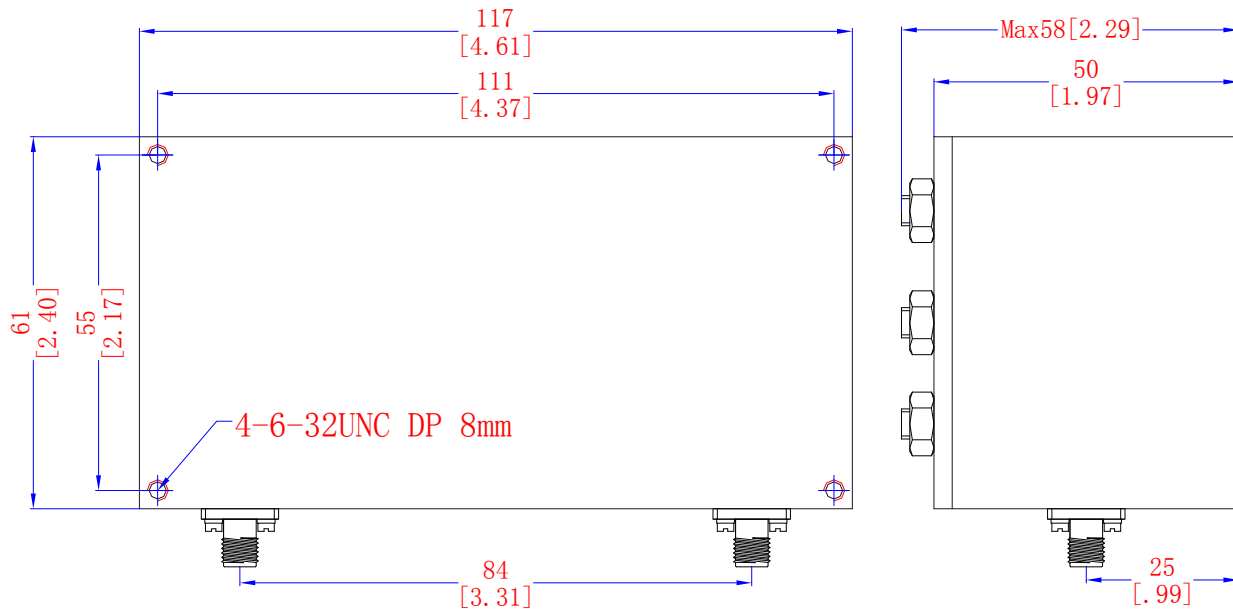



Filter Response Plot:

