



**Electrical Specifications**

**Center Frequency:** 1150 MHz  
**Bandwidth:** Fo ± 220 MHz  
**Pole:** 6  
**Insertion Loss:** 4.0 dB Max  
**Ripple in BW:** 0.5 dB Min  
**VSWR:** 1.7:1 Max  
**Attenuation:** >15 dB @ 870 MHz  
                   >50 dB @ 1800 MHz  
**Impedance:** 50Ω  
**Power Input:** 10 dBm Max

**Mechanical**


**Mounting Method:** SMT  
**Dimensions:** 38 x 17 x 7.5 mm

**Environmental**

**Operating Temperature:** -30 to +80° C  
**Storage Temperature:** -40 to +85° C

**This product is RoHs Compliant**

**Outline Drawing:**

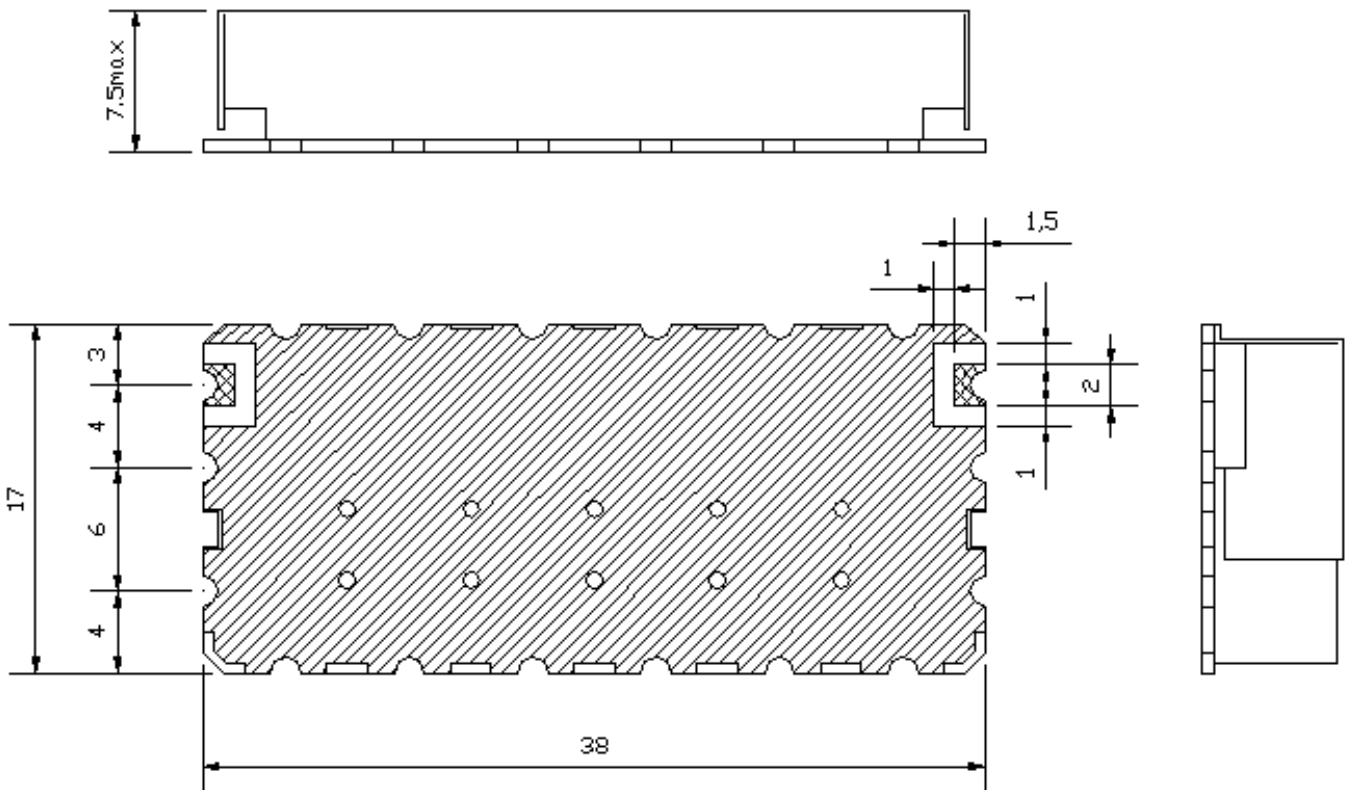

Unit:mm  
Tolerance:±0.3