



# 1575 MHz GPS RF Saw Filter

**Part Number: AM1575S378**




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	1575.42	-
Insertion Loss within 1574.42 ~ 1576.42 MHz	dB	-	0.85	1.00
Amplitude Ripple within 1574.42 ~ 1576.42 MHz	dBp-p	-	0.05	0.30
VSWR within 1574.42 ~ 1576.42 MHz	-	-	1.2	1.6
<b>Attenuation:</b>				
500 ~ 894 MHz	dB	20	24	-
894 ~ 1500 MHz	dB	21	25	-
1650 ~ 2000 MHz	dB	25	28	-
2000 ~ 4000 MHz	dB	20	27	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	7.5
Maximum Input Power	dBm	-	-	20
Source Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Load Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Package Size and Type	2.5 x 2.0 x 1.0 mm L			




### Outline Drawing:

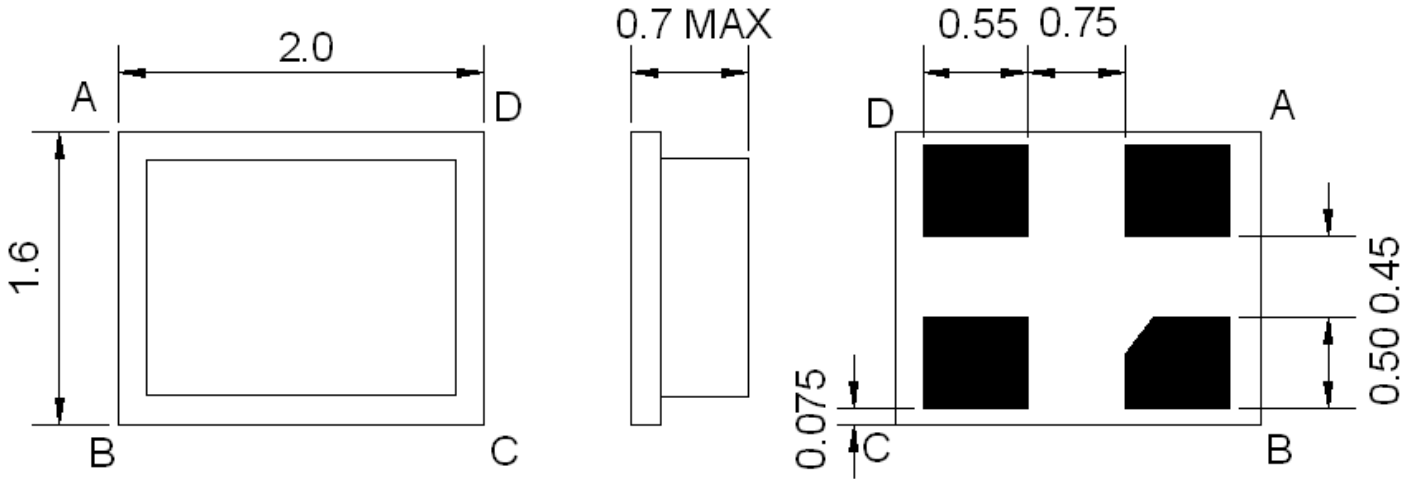

### Pin Description:

Ground – A C  
 Input – B  
 Output – D

### Testing Environment:

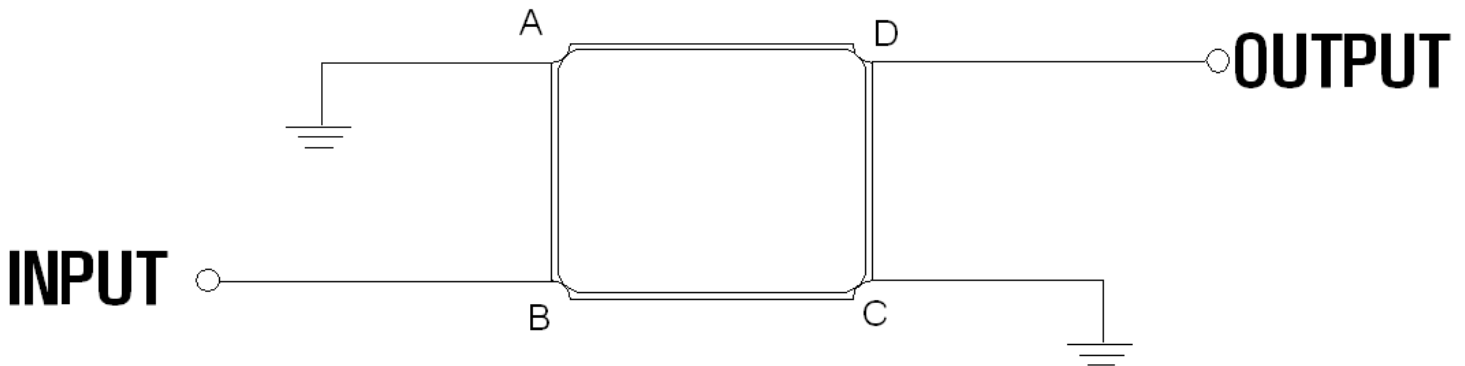

Source/Load Impedance: 50 Ω



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 1575 MHz GPS RF Saw Filter

**Part Number: AM1575S378**



## Response Plot:

