




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	243.95	-
Insertion Loss at Fo	dB	-	TBD	3.5
Amplitude Ripple Variation	dB _{p-p}	-	TBD	1.00
VSWR	-	-	TBD	2.2
Attenuation:				
195-228 MHz	dB	40	TBD	-
275-295 MHz	dB	40	TBD	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	20
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size	5.0 x 5.0 x 1.4 mm			




Outline Drawing:

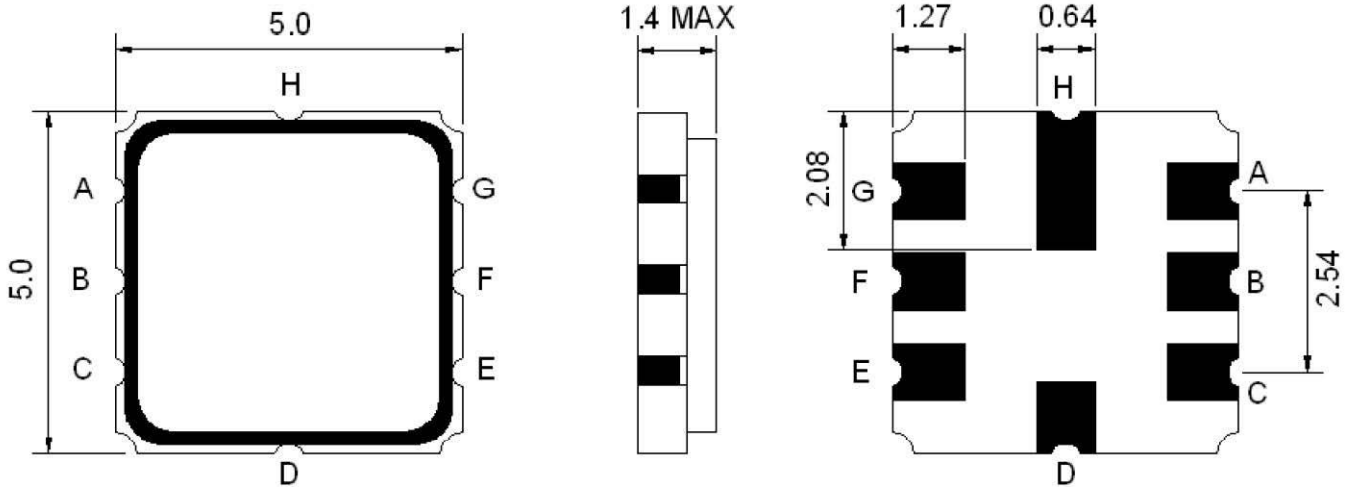

PIN Descriptions:
IN: B,
OUT: F,
Ground: A, C, D, E, G, H

Testing Environment:

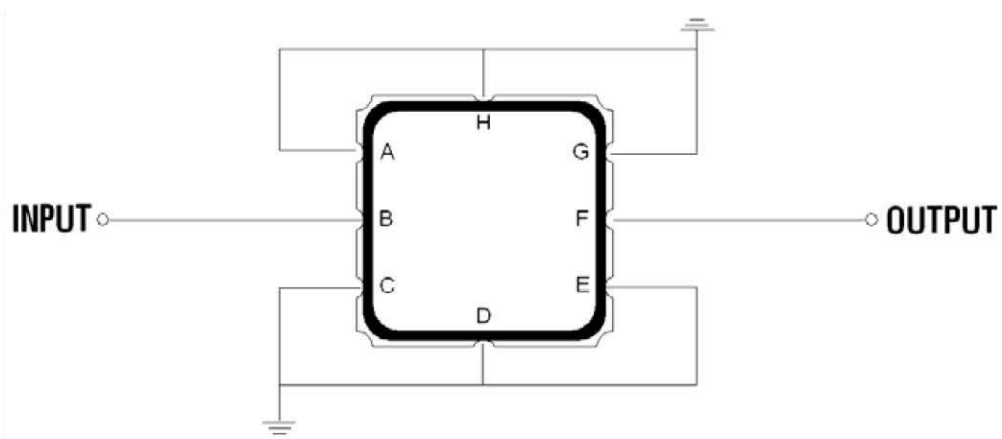

Source & Load Impedance: 50 Ω



Frequency Response:

