




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	250.0	-
Insertion Loss at Fo	dB	-	3.0	4.0
Amplitude Ripple Variation	dB <sub>p-p</sub>	-	1.5	2.5
<b>Stop Band Attenuation:</b>				
DC ~ Fo-42.8 MHz	dB	50	55	-
Fo+40.0 ~ Fo+200.0 MHz	dB	50	55	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-10	-	+60
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	0
Source Impedance (Single Ended) <sub>1</sub>	Ω	-	150	-
Load Impedance (Single Ended) <sub>1</sub>	Ω	-	150	-
Package Size and Type	5.0 x 5.0 x 1.4 mm		K	




### Outline Drawing:

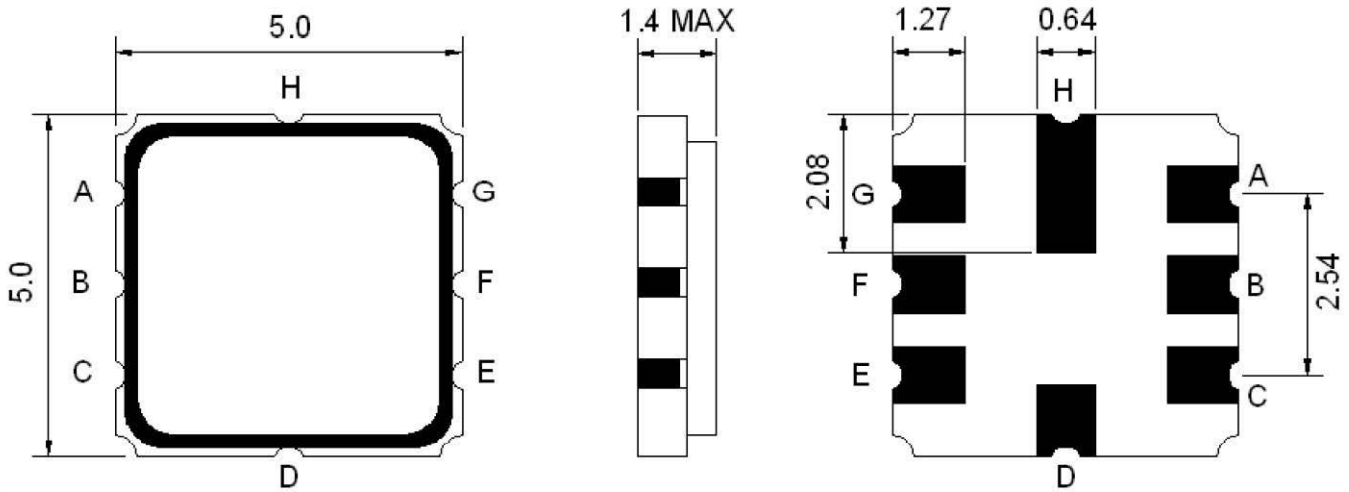

PIN Descriptions:  
 IN: B,  
 OUT: F,  
 Ground: A, C, D, E, G, H

### Testing Environment:

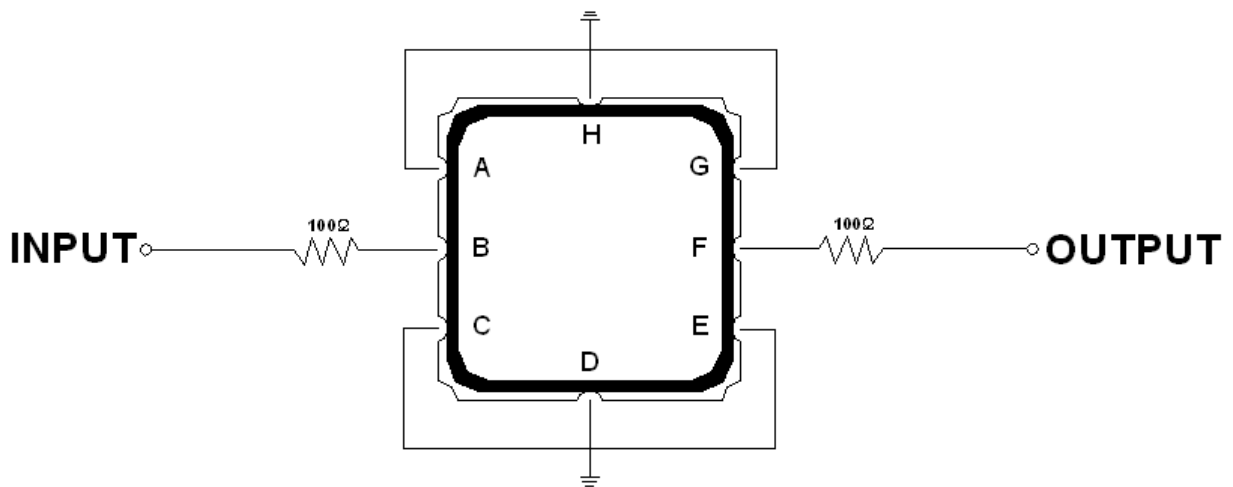

Source & Load Impedance: 50 Ω



### Frequency Response:

