



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

412 MHz CDMA 450 L-Band RF-Tx Saw Filter

Part Number: AM412S444




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	412.75	-
Insertion Loss within 410.5 ~ 415.0 MHz	dB	-	2.5	2.8
VSWR within 410.5 ~ 415.0 MHz	-	-	1.3	2.0
Stop Band Attenuation:				
0.3 ~ 400.0 MHz	dB	23	26	-
420.0 ~ 425.0 MHz	dB	30	48	-
425.0 ~ 1700.0 MHz	dB	20	27	-
1700.0 ~ 2000.0 MHz	dB	15	22	-


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	30
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size and Type	3.0 x 3.0 x 1.4 mm M			



Outline Drawing:

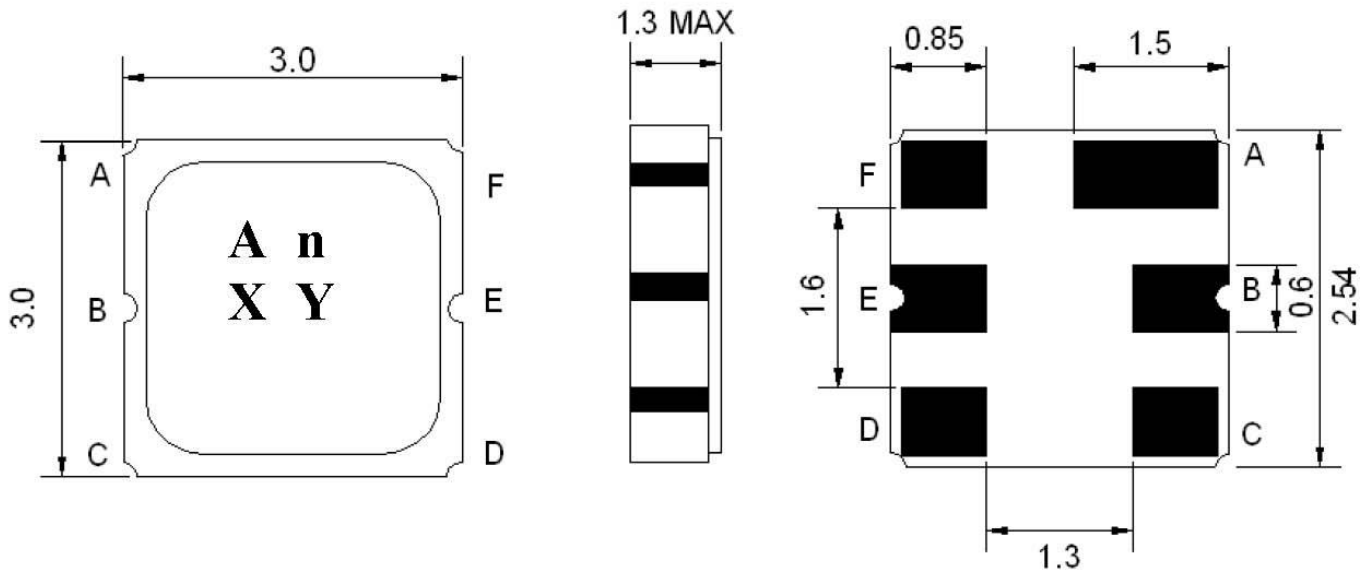

Testing Environment:

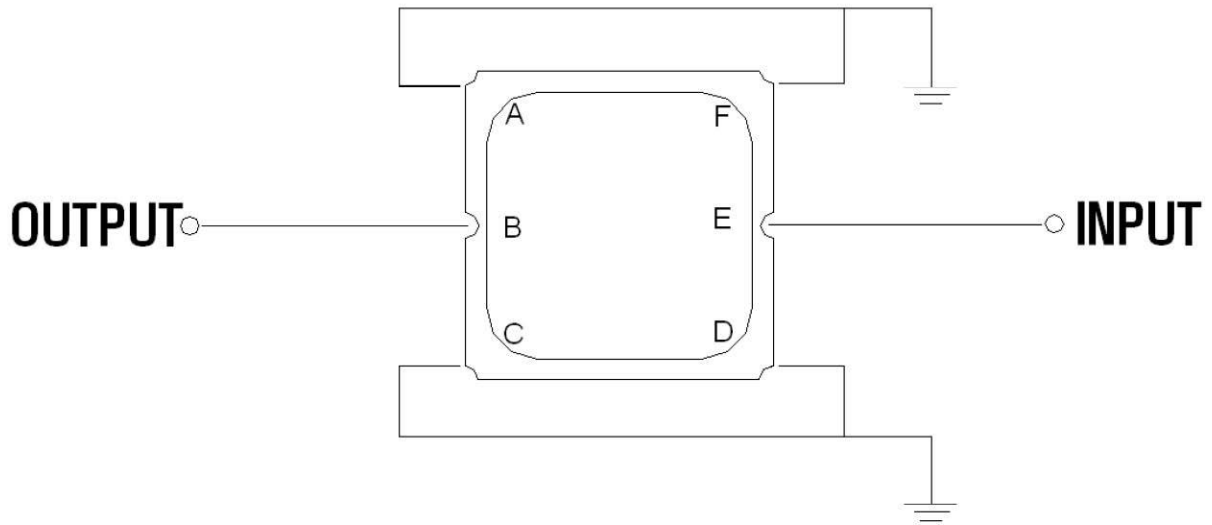

Source/Load Impedance: 50 Ω





412 MHz CDMA 450 L-Band RF-Tx Saw Filter

Part Number: AM412S444



Response Plot:

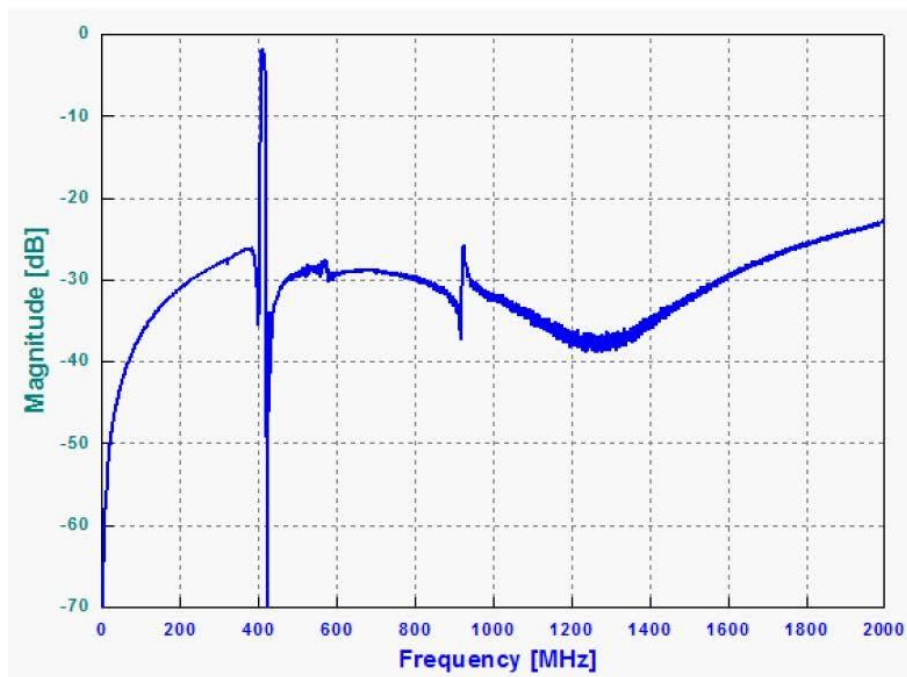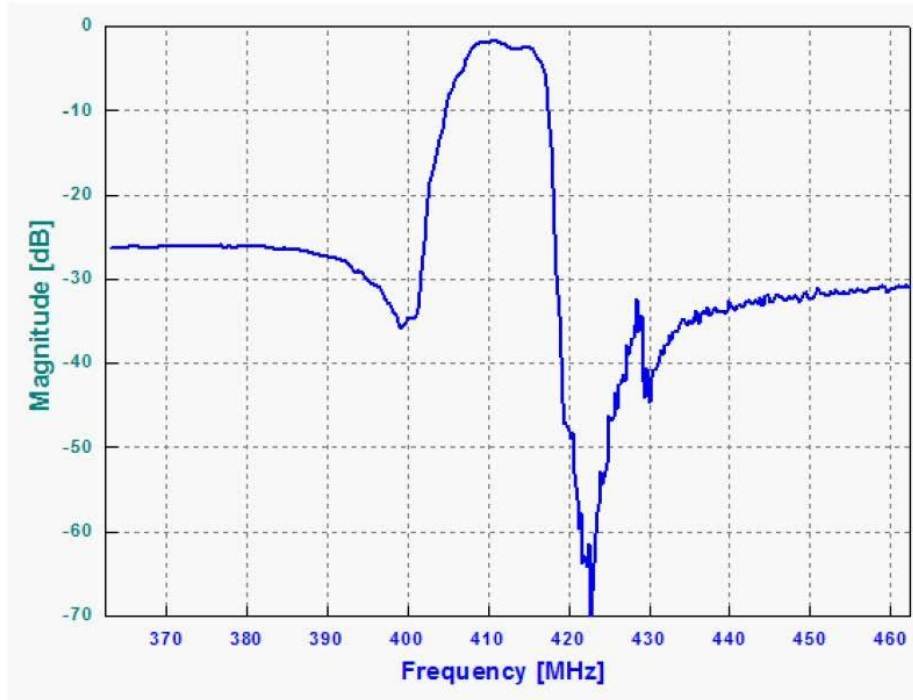





ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

412 MHz CDMA 450 L-Band RF-Tx Saw Filter

Part Number: AM412S444



Response Plot: VSWR

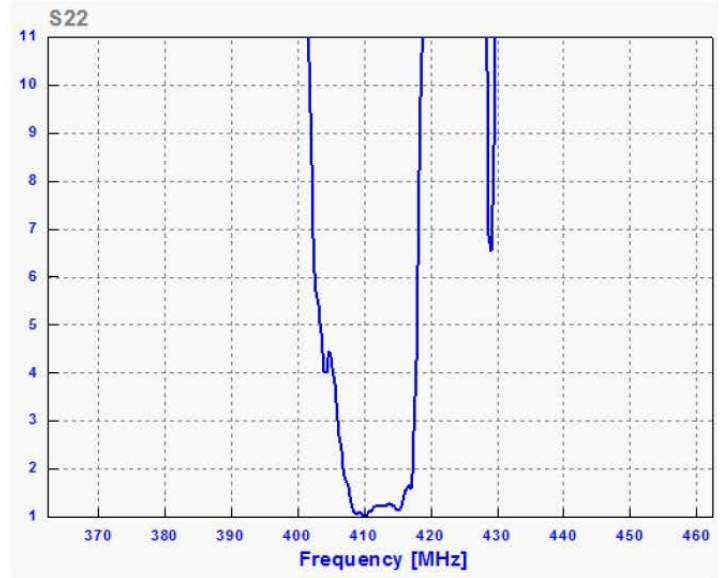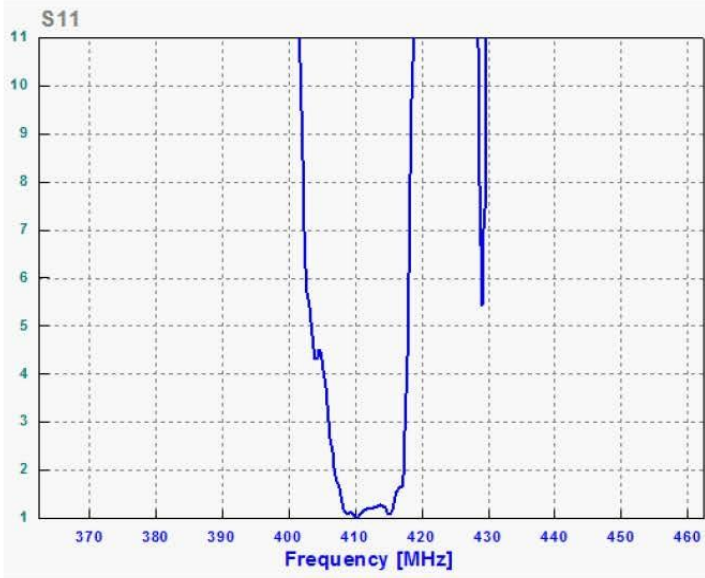

Smith Chart

