



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 467 MHz CDMA 450 G-Band RF-Rx Saw Filter

**Part Number: AM467S500**




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	467.6	-
Insertion Loss in 465.2 ~ 470.0 MHz	dB	-	2.4	4.0
VSWR in 465.2 ~ 470.0 MHz	-	-	2.0	2.5
<b>Stop Band Attenuation:</b>				
0.3 ~ 455.2 MHz	dB	40	50	-
455.2 ~ 460.0 MHz	dB	35	49	-
490.0 ~ 700.0 MHz	dB	40	50	-
700.0 ~ 1200.0 MHz	dB	40	55	-
1200.0 ~ 2000.0 MHz	dB	35	50	-


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	27
Source Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Load Impedance (Single Ended) <sub>1</sub>	Ω	-	100	-
Package Size and Type	3.0 x 3.0 x 1.3 mm		M1	



**Outline Drawing:**

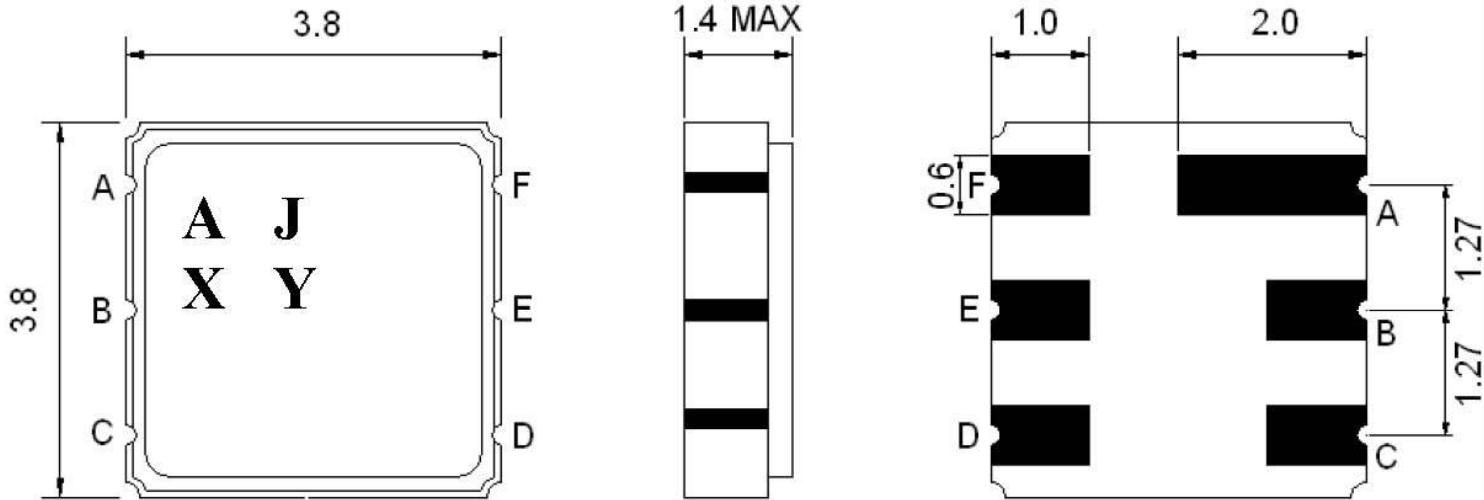

**Testing Environment:**


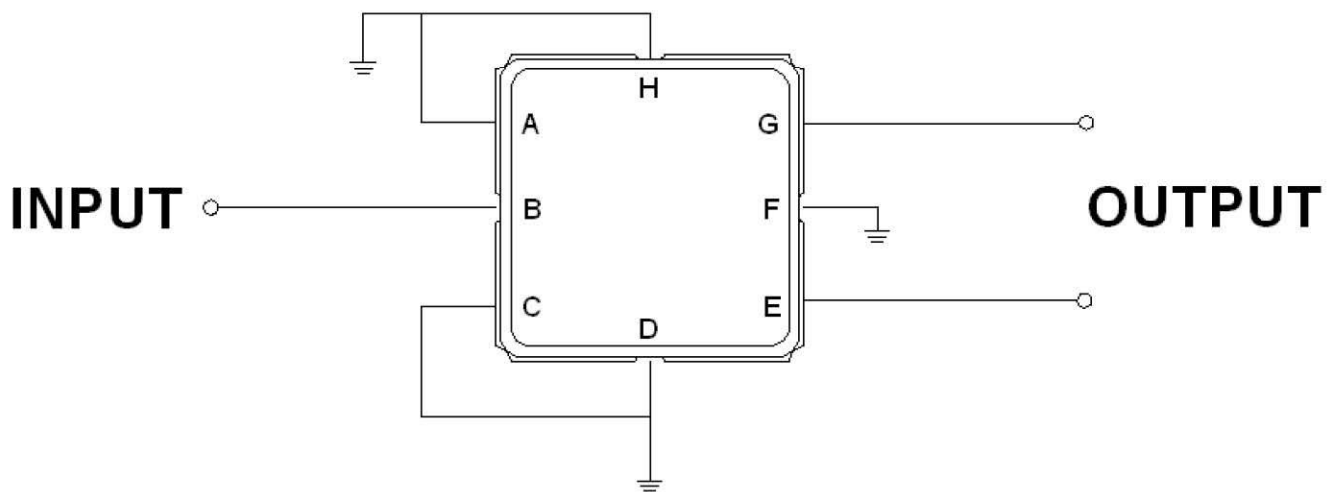


Source Impedance: 50  $\Omega$

Load Impedance : 100  $\Omega$



**Response Plot:**

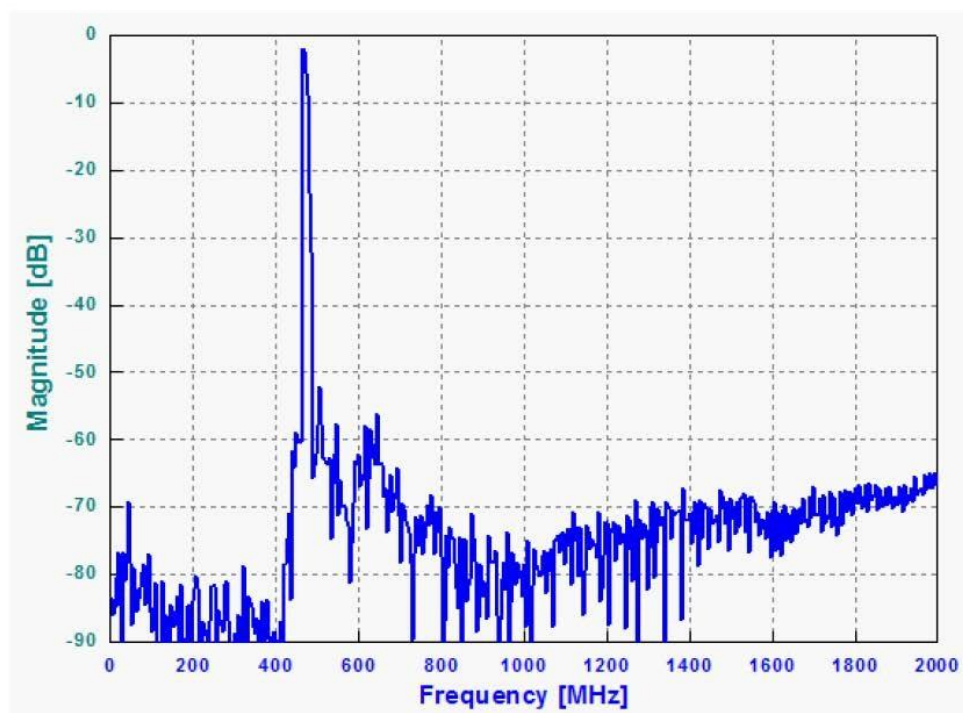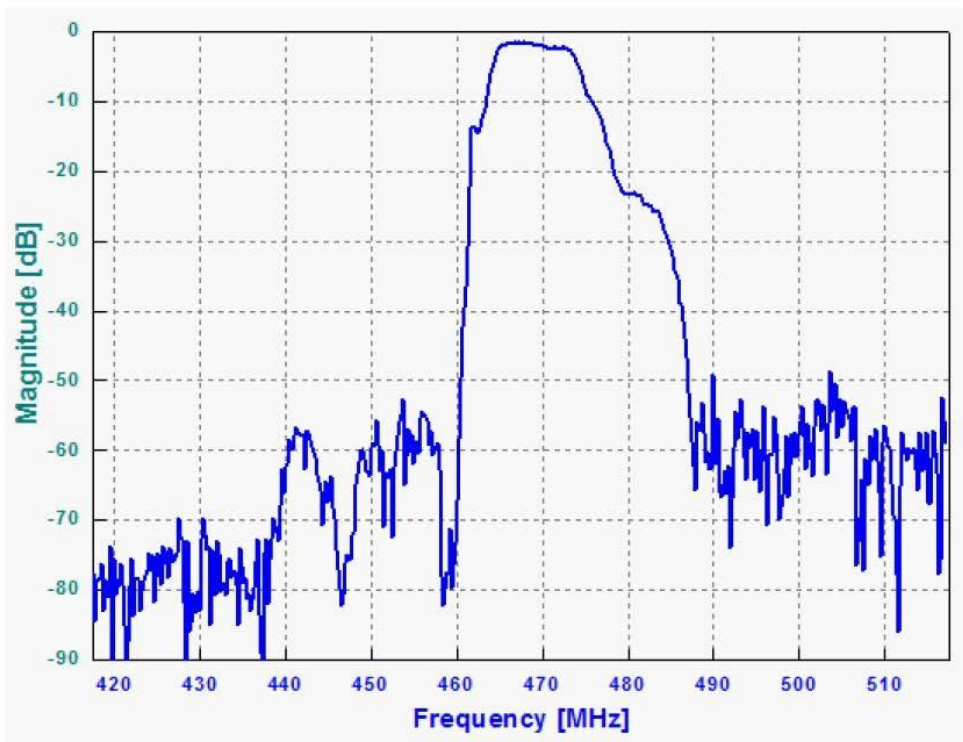





**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 467 MHz CDMA 450 G-Band RF-Rx Saw Filter

**Part Number: AM467S500**



## VSWR

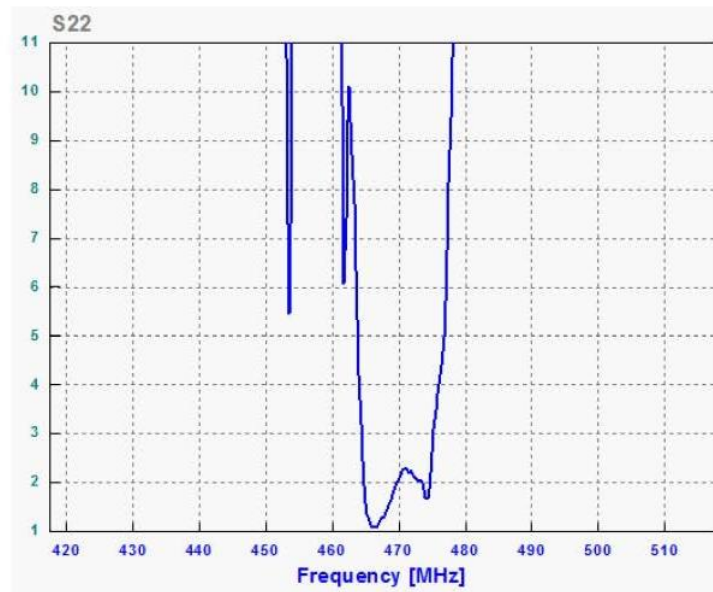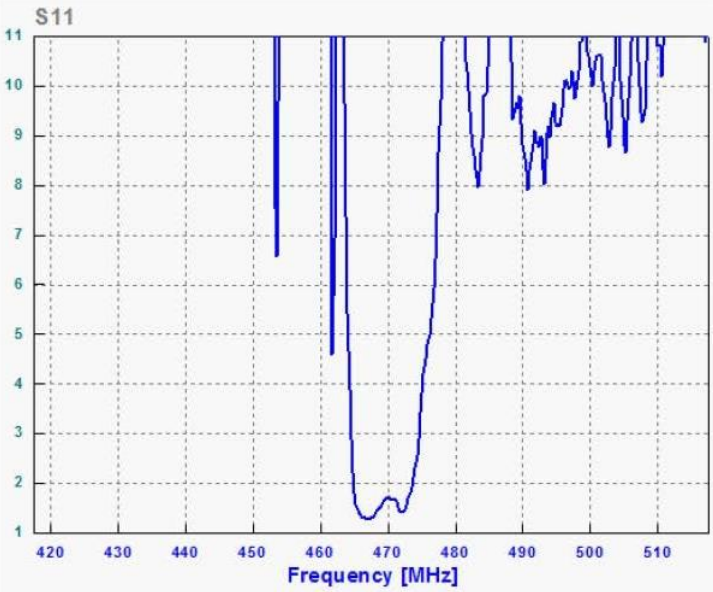

## Smith Chart

