



70.0 MHz Saw Filter

Part Number: AM70S228



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	69.94	70.00	70.06
Insertion Loss at Fo	dB	-	23.0	24.5
Passband Ripple Variation	dB	-	0.75	1.00
Group Delay Variation	nsec	-	80	120
Absolute Delay at Fo	µsec	-	2.90	-
Bandwidth at 3.0 dB	MHz	9.60	9.80	-
Bandwidth at 40.0 dB	MHz	-	10.85	11.00
Ultimate Rejection	dB	50	55	-
Substrate Material	128 LiNbO3			

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size	20.1 x 12.5 x 5.0 mm			




70.0 MHz Saw Filter

Part Number: AM70S228



Outline Drawing:

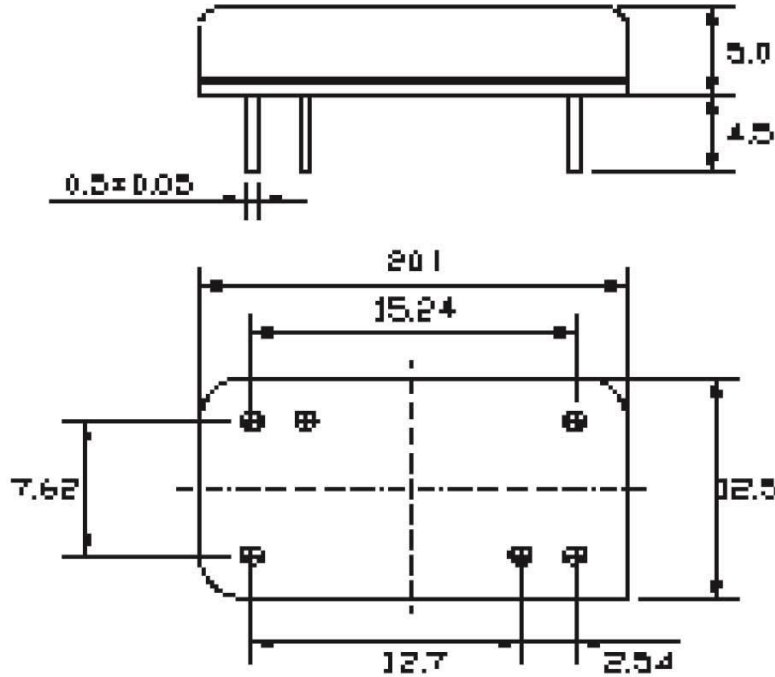

Matching Configuration:



Bottom View

Source / Load Impedance = 50Ω

Ambient Temperature = 25°C



70.0 MHz Saw Filter

Part Number: AM70S228



Plot:

