



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

70.0 MHz Saw Filter

Part Number: AM70S265



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	69.92	70.00	70.08
Insertion Loss at Fo	dB	-	23.5	25.0
Passband Ripple Variation	dB	-	0.45	0.80
Group Delay Variation	nsec	-	80	150
Absolute Delay at Fo	µsec	-	2.02	-
Bandwidth at 3.0 dB	MHz	3.80	3.85	-
Bandwidth at 40.0 dB	MHz	-	5.13	5.30
Ultimate Rejection	dB	50	55	-
Substrate Material	112 LiTaO ₃			

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size	20.1 x 12.5 x 5.0 mm			




70.0 MHz Saw Filter

Part Number: AM70S265



Outline Drawing:

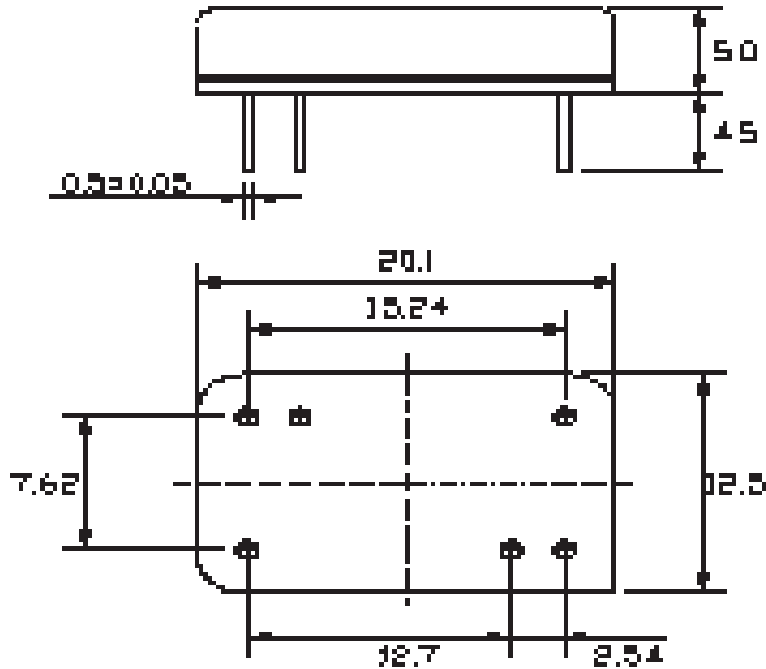

Matching Configuration:



$L = 82 \text{ nH}$ $C = 150 \text{ Fp}$
Bottom View
Source/Load Impedance = 50
Ambient Temperature = 25°C



70.0 MHz Saw Filter

Part Number: AM70S265



Plot:

