



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 70.0 MHz Saw Filter

## Part Number: AM70S407



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	39.92	70.00	70.08
Insertion Loss at Fo	dB	-	20.5	22.0
Passband Ripple Variation	dB	-	0.45	0.80
Group Delay Variation	nsec	-	70	-
Absolute Delay at Fo	µsec	-	2.30	-
Bandwidth at 3.0 dB	MHz	9.40	9.45	-
Bandwidth at 40.0 dB	MHz	-	10.85	11.00
Ultimate Rejection	dB	50	60	-
Substrate Material	128 LiNbO <sub>3</sub>			

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Load Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Package Size	20.1 x 12.5 x 5.0 mm			




# 70.0 MHz Saw Filter


## Part Number: AM70S407



### Outline Drawing:

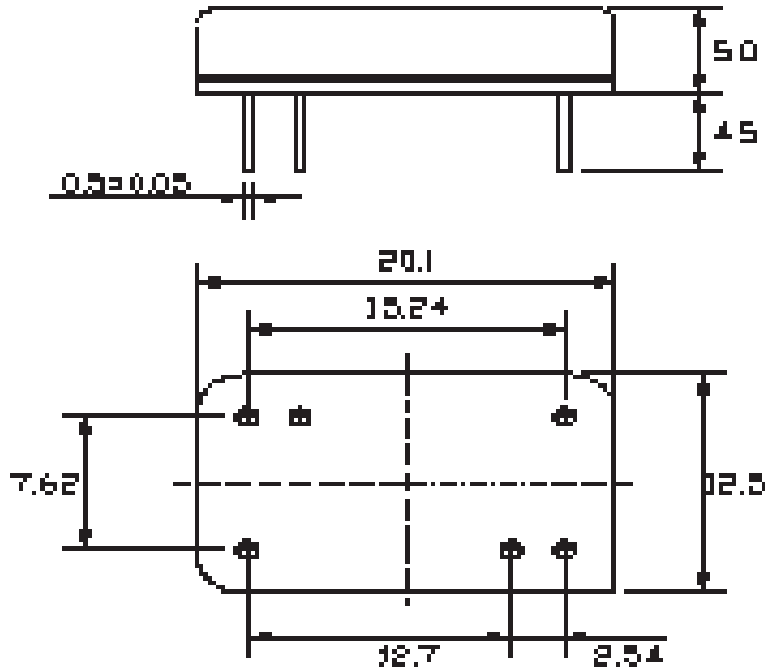

### Matching Configuration:

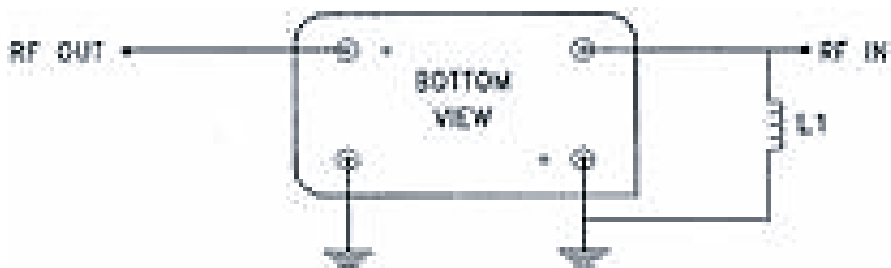

Bottom View  
Source/Load Impedance = 50  
Ambient Temperature = 25°C



# 70.0 MHz Saw Filter

## Part Number: AM70S407



Plot:

