



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

70 MHz IF Saw Filter 14 MHz Bandwidth

Part Number: AM70S554



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	69.92	70.00	70.08
Insertion Loss at Fo	dB	-	23.5	25.0
Passband Ripple Variation	dB	-	0.75	1.0
Group Delay Variation	nsec	-	35	70
Absolute Delay at Fo	µsec	-	1.62	-
Temperature Coefficient	ppm/°C	-	-72	-
Bandwidth at -1.0 dB	MHz	-	14.37	-
Bandwidth at -3.0 dB	MHz	17.70	14.82	-
Bandwidth at -40.0 dB	MHz	-	16.82	16.90
Ultimate Rejection	dB	45	50	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-	+25	-
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size and Type		13.3 x 6.5 x 1.8 mm		V




70 MHz IF Saw Filter 14 MHz Bandwidth

Part Number: AM70S554




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Outline Drawing:

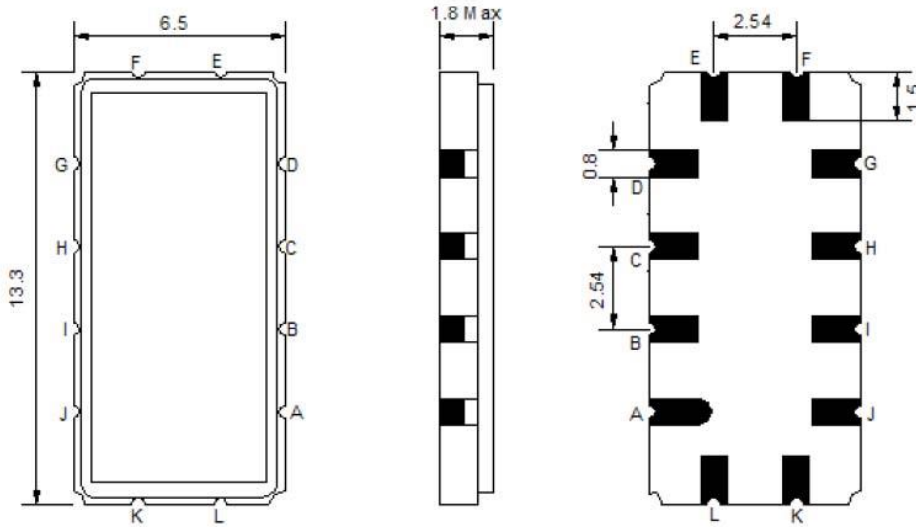

Pin Description	
A B C D F G H I J L	Ground
K	Input
E	Output

Testing Environment:

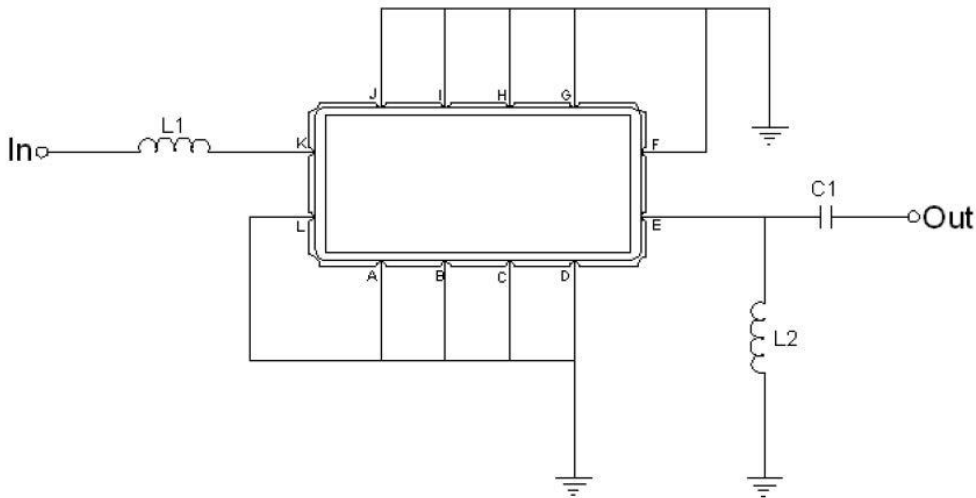

Test Fixture & Values	
Input	L1 = 180 nH
Output	L2 = 220 nH , C2 = 50 pF
Source/Load Impedance	50 Ω



70 MHz IF Saw Filter 14 MHz Bandwidth


Part Number: AM70S554




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Frequency Response:


Bandwidth at -1.0 dB

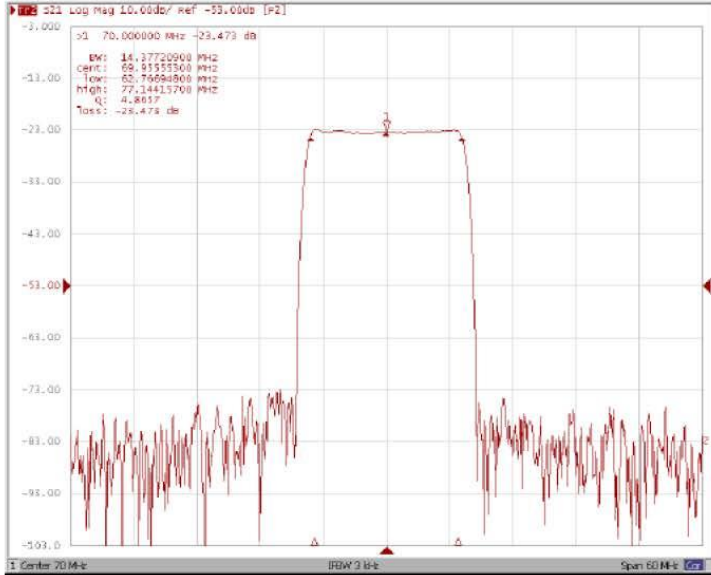

Bandwidth at -3.0 dB

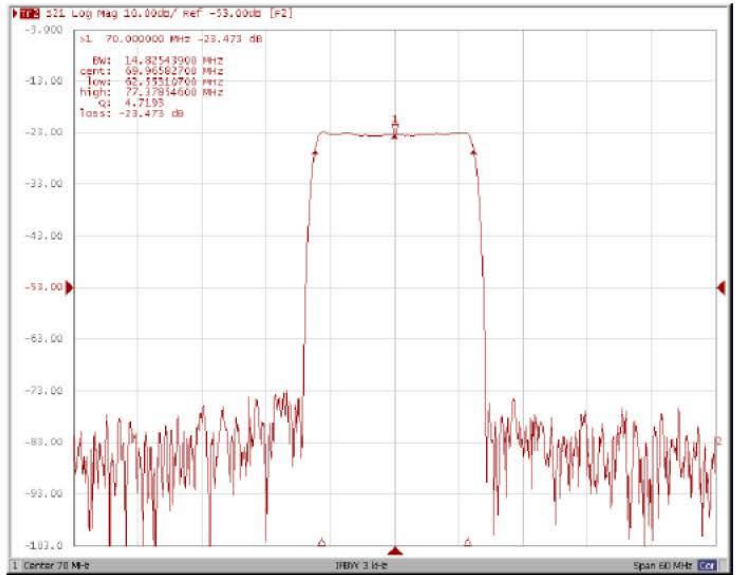

Bandwidth at -40.0 dB

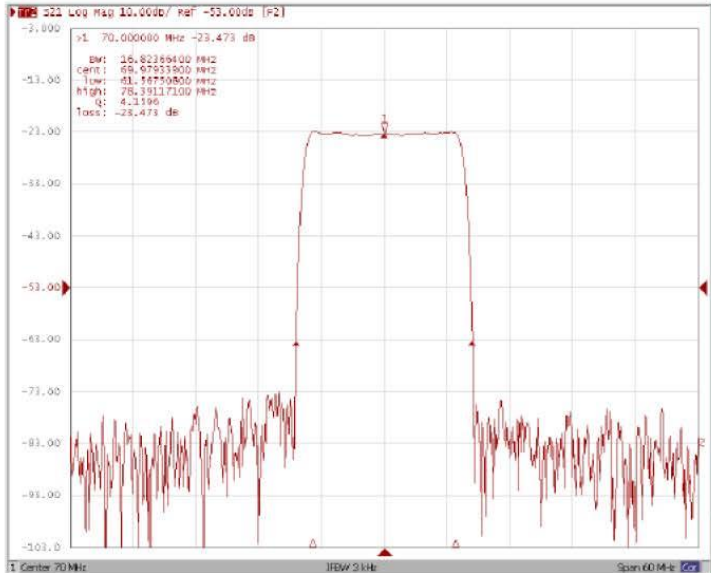

Bandwidth at -50.0 dB





70 MHz IF Saw Filter 14 MHz Bandwidth




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products


Part Number: AM70S554

Frequency Response:


Ripple Variation Fo±6.8MHz

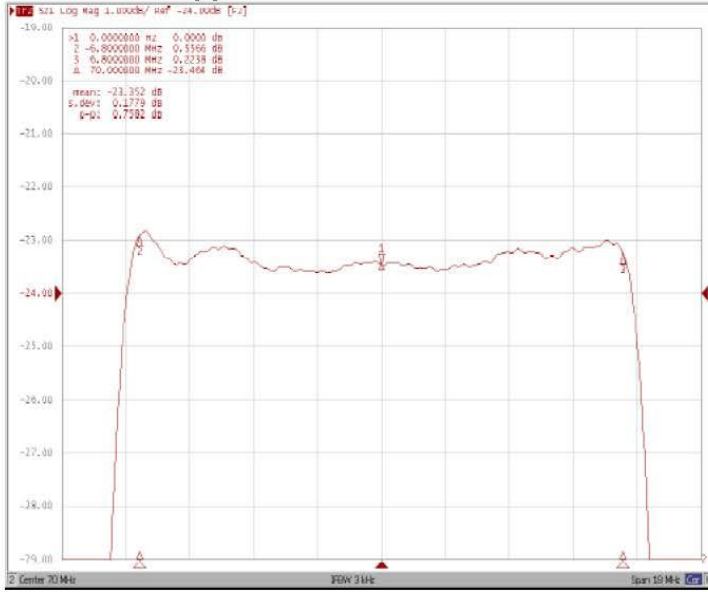

Group Delay Variation Fo±6.8MHz

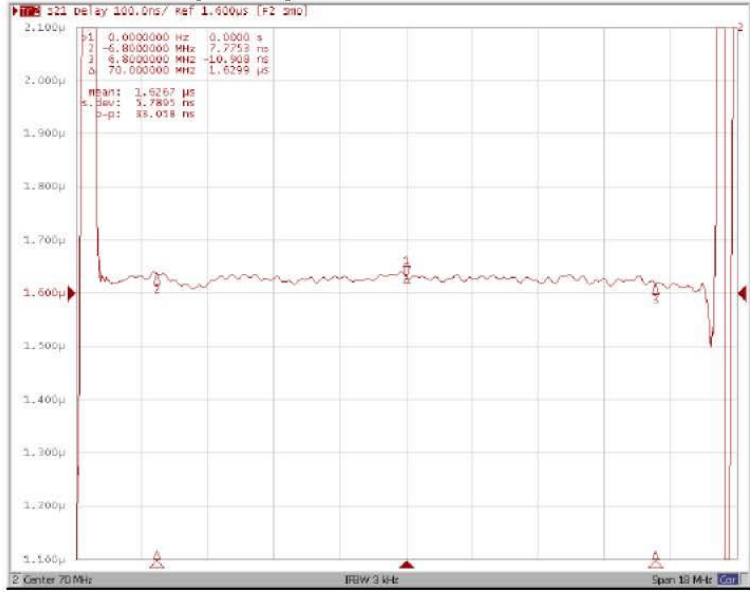

Smith Chart

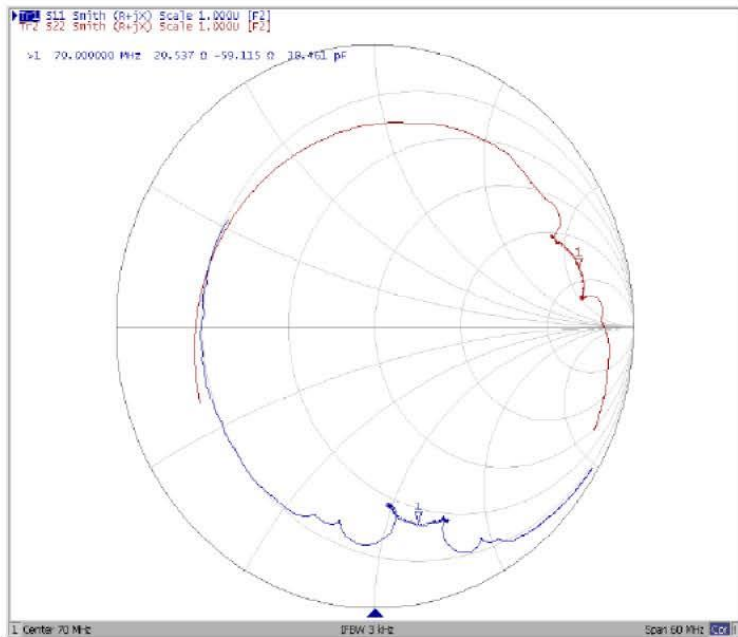

SWR

