



70 MHz IF Saw Filter 19 MHz Bandwidth



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM70S634

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	70.00	-
Insertion Loss at Fo	dB	-	26.0	28.0
Passband Ripple at Fo ± 9.22 MHz	dB	-	0.55	1.00
Group Delay Variation at Fo ± 9.22 MHz	nsec	-	20	50
Absolute Delay at Fo	µsec	-	1.61	-
Bandwidth at -1.0 dB	MHz	-	19.36	-
Bandwidth at -3.0 dB	MHz	19.60	19.88	-
Bandwidth at -40.0 dB	MHz	-	21.77	22.00
Ultimate Rejection	dB	45	50	-
Relative Attenuation at Fo ± 10.8 MHz	dB	20	33	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-40	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size and Type		13.3 x 6.5 x 1.8 mm		V






70 MHz IF Saw Filter 19 MHz Bandwidth

Part Number: AM70S634




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Outline Drawing:

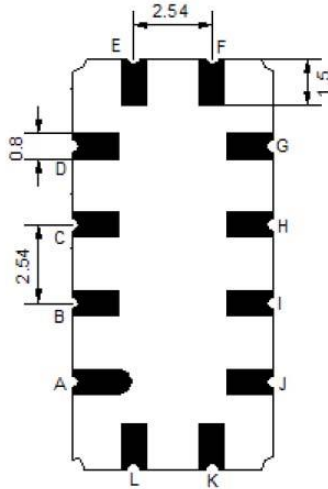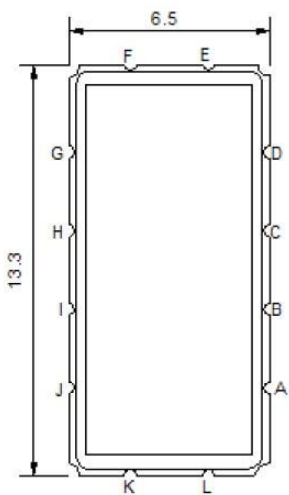

Pin Description	
A B C D F G H I J L	Ground
K	Input
E	Output

Testing Environment:

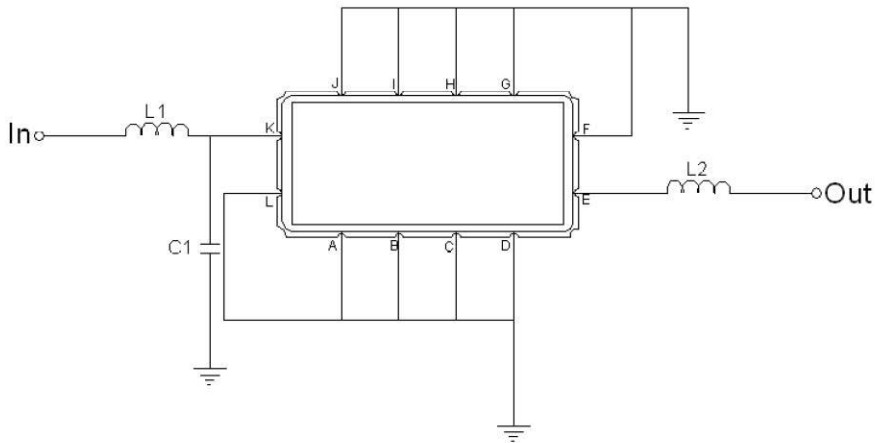

Test Fixture & Values	
Input	L1=180 nH, C1=12pF
Output	L2=150 nH
Source/Load Impedance	50 Ω



70 MHz IF Saw Filter 19 MHz Bandwidth


Part Number: AM70S634




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Frequency Response:


Bandwidth at -3.0 dB

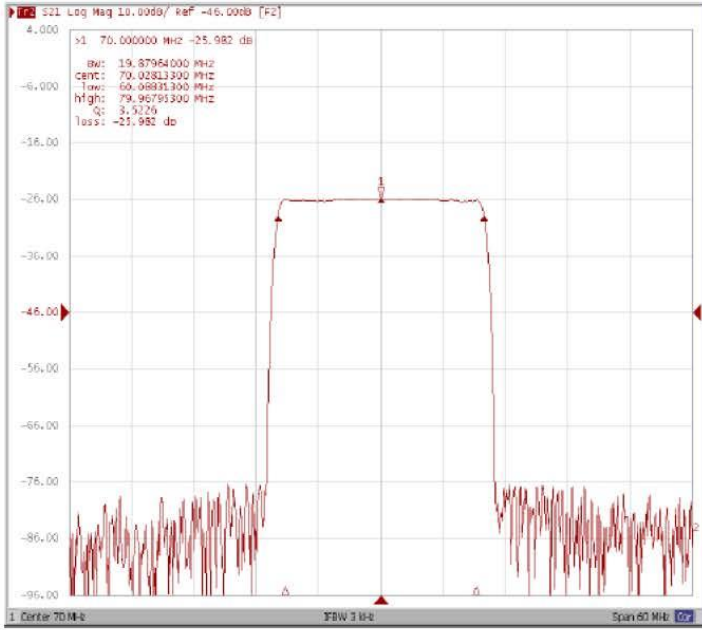


Bandwidth at -40.0 dB

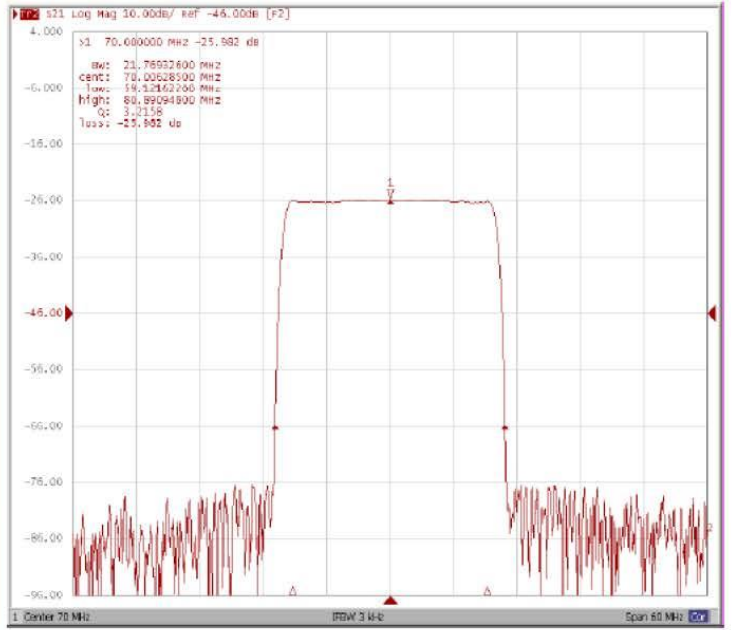

Bandwidth at -1.0 dB

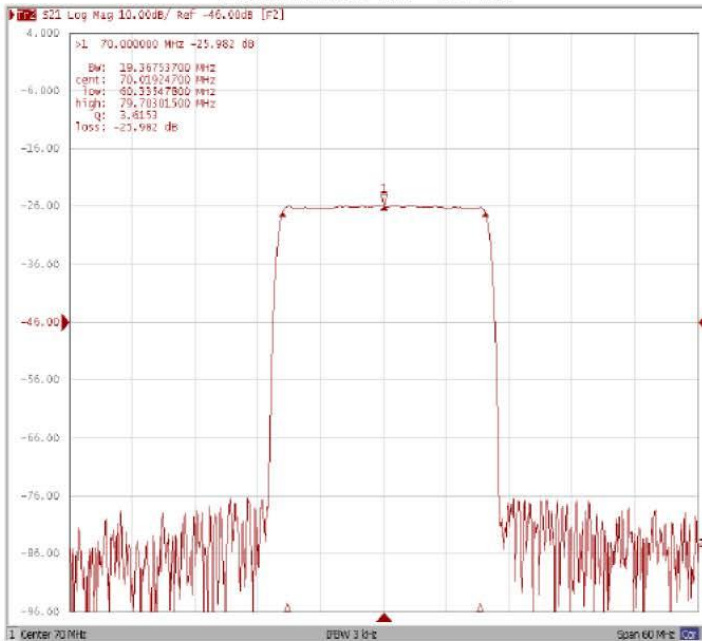

Relative Attenuation Fo±10.8MHz

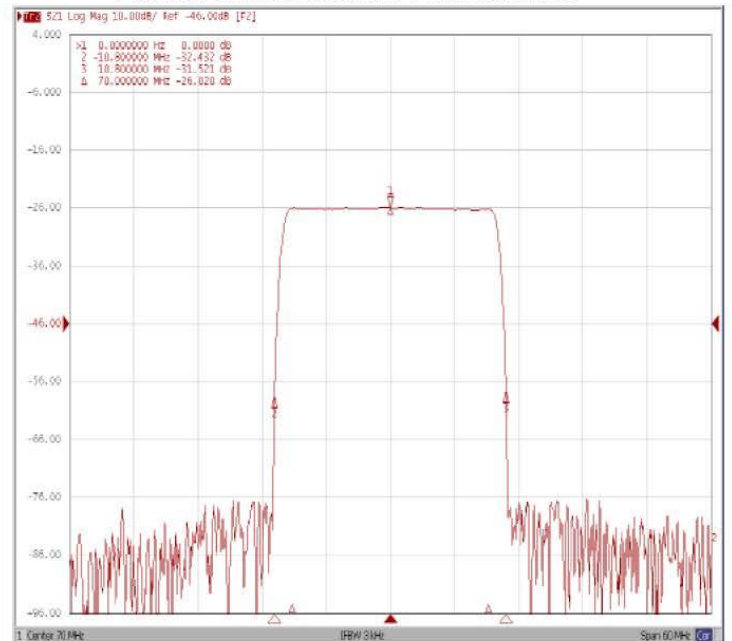



70 MHz IF Saw Filter 19 MHz Bandwidth




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products


Part Number: AM70S634

Frequency Response:


Ripple Variation

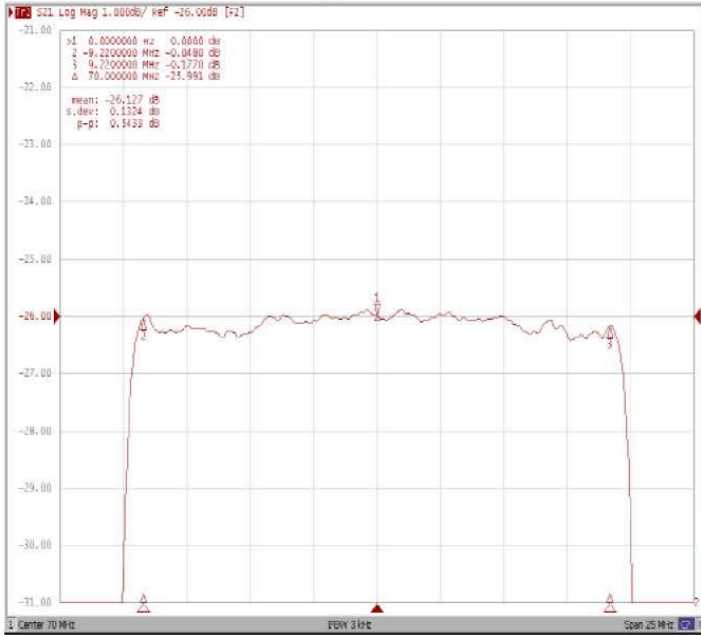

Group Delay Variation

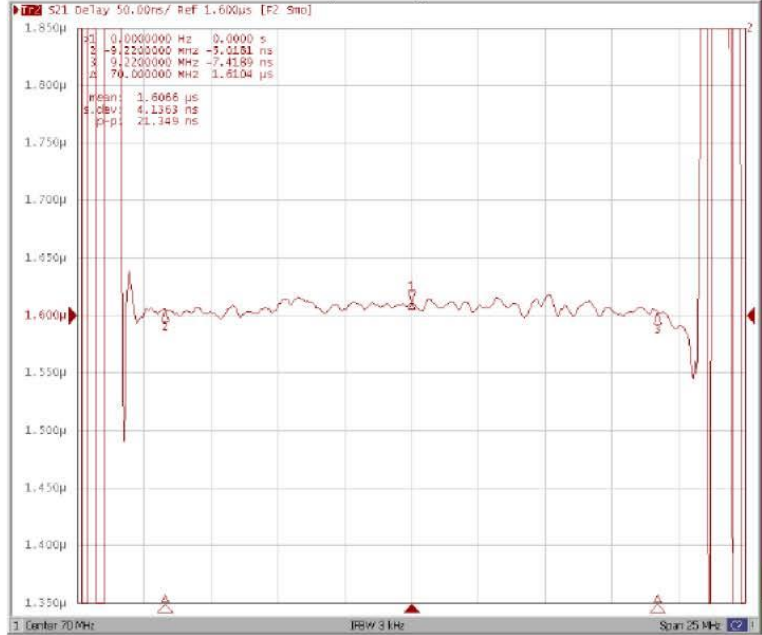

Smith Chart

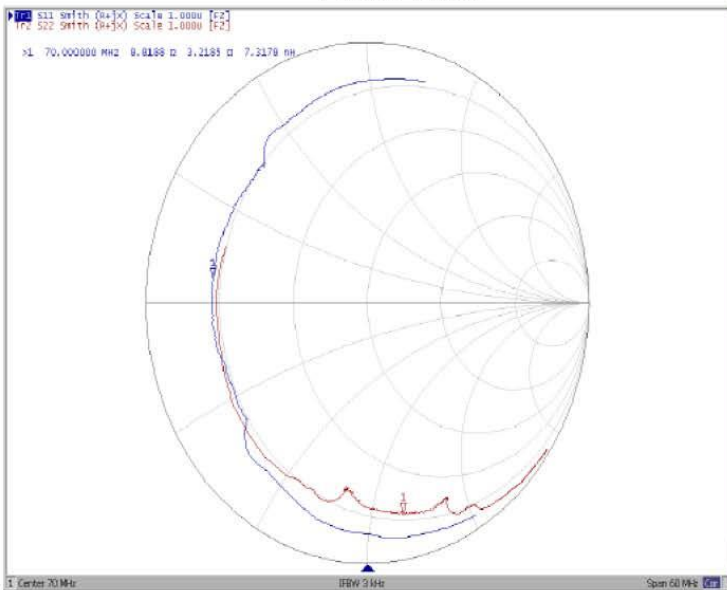

VSWR

