



75 MHz IF Saw Filter 11 MHz Bandwidth

Part Number: AM75S558

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	75.00	-
Insertion Loss at Fo	dB	-	20.5	23.5
Passband Ripple (Fo ± 5.5 MHz)	dB	-	0.56	1.00
Group Delay Variation (Fo ± 5.5 MHz)	nsec	-	42	100
Absolute Delay	µsec	-	2.40	-
Temperature Coefficient	ppm/°C	-	-72	-
Bandwidth at -1.0 dB	MHz	11.00	11.65	-
Bandwidth at -30.0 dB	MHz	-	13.13	-
Bandwidth at -45.0 dB	MHz	-	13.40	15.00
Ultimate Rejection	dB	-	55	-
Relative Attenuation:				
Fo ± 6.5 MHz	dB	-	24	-
Fo ± 7.5 MHz	dB	-	55	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	0	-	+60
Storage Temperature Range	°C	-20	-	+70
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size and Type	20.0 x 9.8 x 1.8 mm		D1	




75 MHz IF Saw Filter 11 MHz Bandwidth

Part Number: AM75S558




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Outline Drawing:

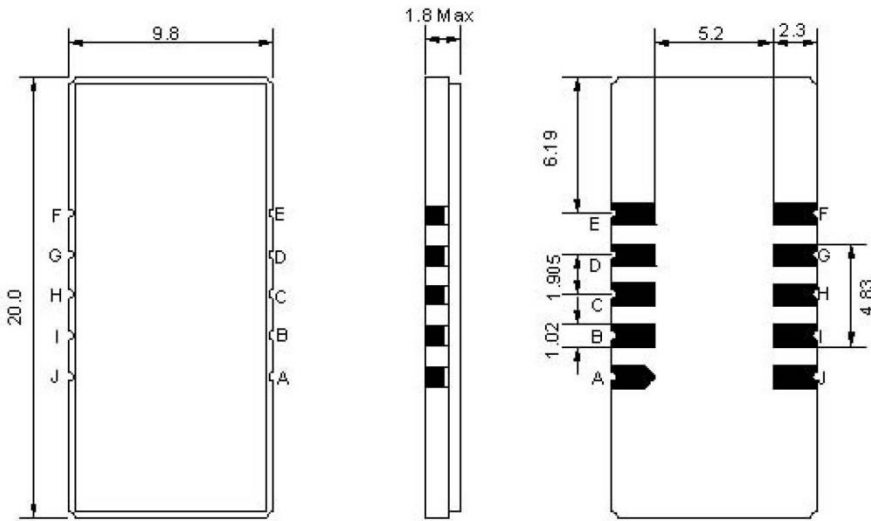

Pin Description	
Ground	A B C D F G H I
Input	J
Output	E

Testing Environment:

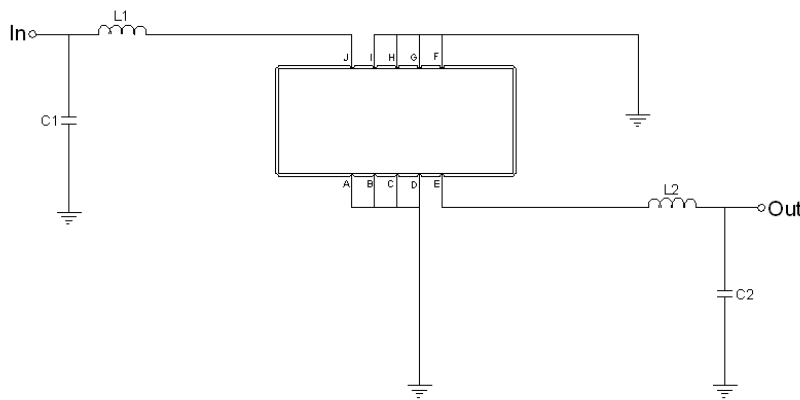

Test Fixture & Values	
Input	L1 = 68 nH C1 = 20 pF
Output	L2 = 68 nH C2 = 20 pF
Source/Load Impedance	50 Ω



75 MHz IF Saw Filter 11 MHz Bandwidth




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products


Part Number: AM75S558

Frequency Response:


Bandwidth at -1.0 dB

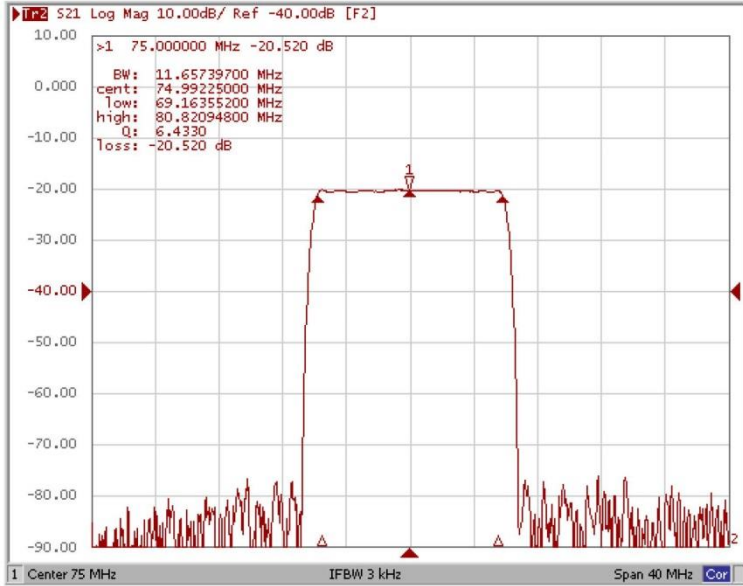


Bandwidth at -30.0 dB

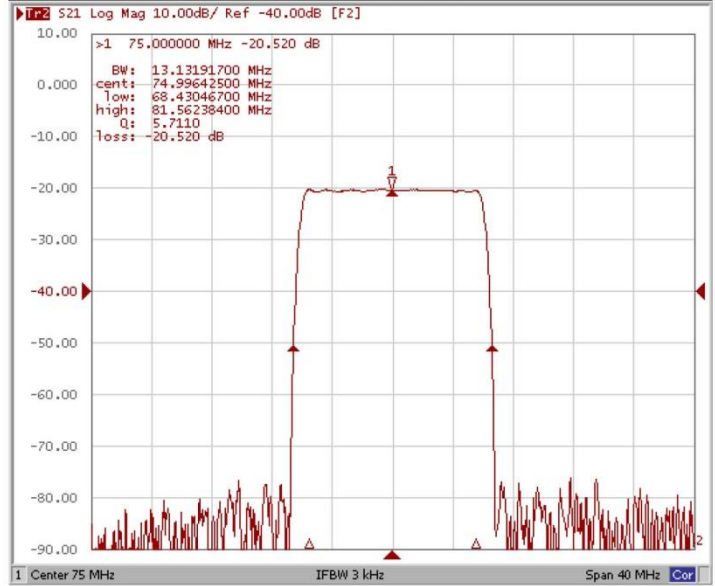

Bandwidth at -45.0 dB Relative

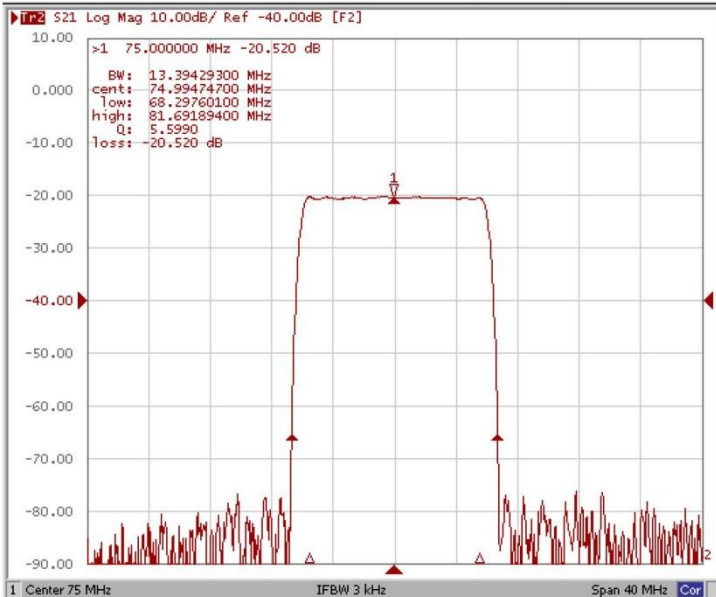

Attenuation Fo±6.5MHz /Fo±7.5MHz

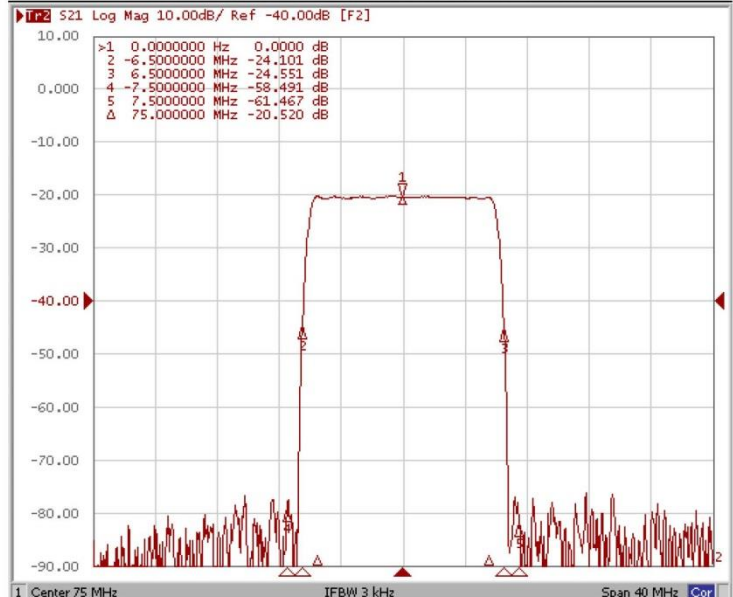



75 MHz IF Saw Filter 11 MHz Bandwidth




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products


Part Number: AM75S558

Frequency Response:


Ripple Variation Fo±5.5MHz

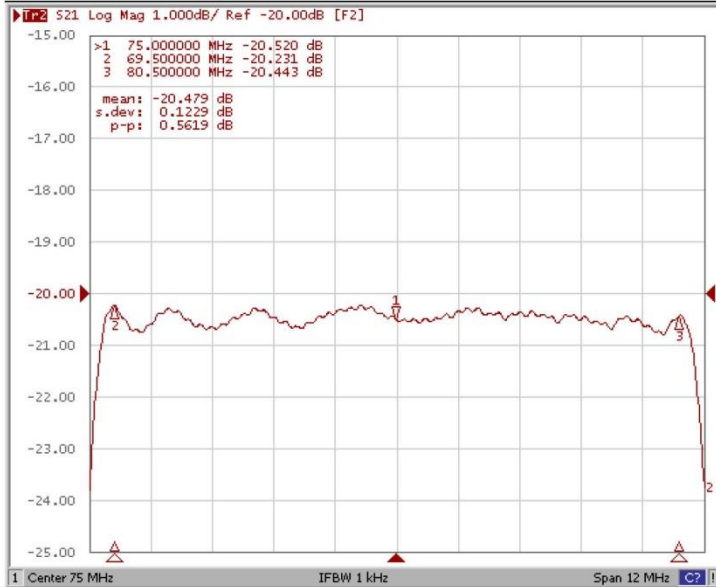

Group Delay Variation Fo±5.5MHz

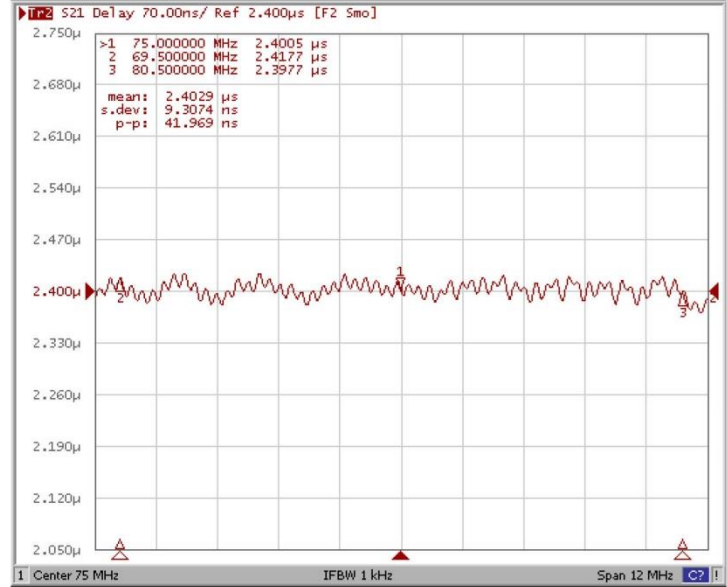

Smith Chart

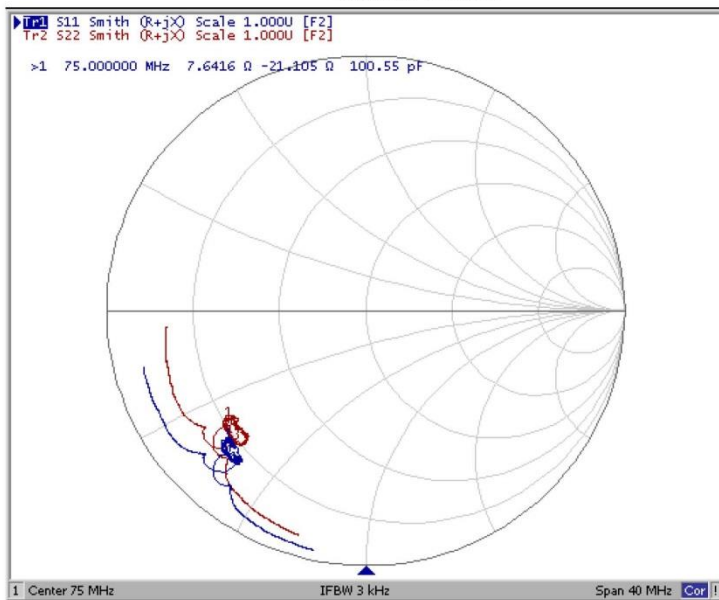

VSWR

