



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

806-821 MHz / 851-866 MHz Ceramic Duplexer

Part Number: AM813-858D1083




<u>Characteristics</u>	<u>Band 1</u>	<u>Band 2</u>
Passband:	806-821 MHz	851-866 MHz
Bandwidth:	15 MHz	15 MHz
Passband Return Loss:	15 dB min	15 dB min
Passband Insertion Loss:	2.5 dB max	2.5 dB max
Passband Ripple:	1.0 dB max	1.0 dB max
Input / Output Impedance:	50 Ohms	50 Ohms
Isolation:	55 dB min.	55 dB min.
Power Handling:	4 W	4 W

<u>Mechanical</u>	
Mounting Method:	SMT
Dimensions:	40.5 x 13.52 x 8 mm

<u>Environmental</u>	
Operating Temperature:	-40 to +85 deg.C
Storage Temperature:	-50 to +90 deg.C

This product is RoHs compliant.

Outline Drawing:

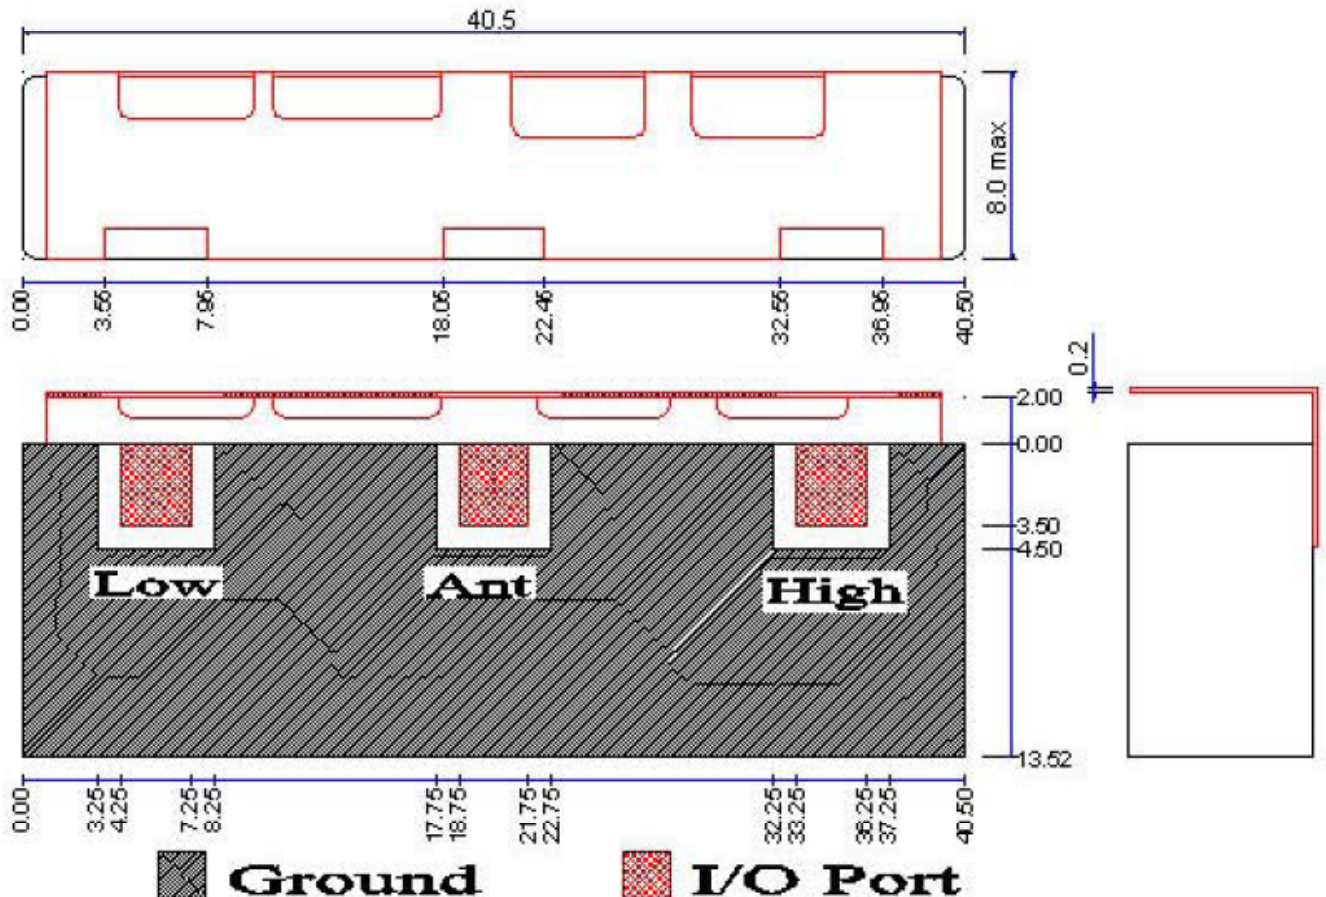



806-821 MHz / 851-866 MHz Ceramic Duplexer

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM813-858D1083



Response Plot:

