



866 MHz Wireless, RF Saw Filter

Part Number: AM866S517


Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	866.5	-
Insertion Loss within 863.0 ~ 870.0 MHz	dB	-	2.2	3.0
Amplitude Ripple within 863.0 ~ 870.0 MHz	dB _{p-p}	-	0.4	1.5
Attenuation:				
825.0 ~ 828.0 MHz	dB	40	55	-
846.0 ~ 849.0 MHz	dB	35	45	-
889.0 ~ 892.0 MHz	dB	30	36	-
910.0 ~ 913.0 MHz	dB	40	55	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾		-	50	-
Load Impedance (single ended) ⁽¹⁾		-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3




866 MHz Wireless, RF Saw Filter

Part Number: AM866S517

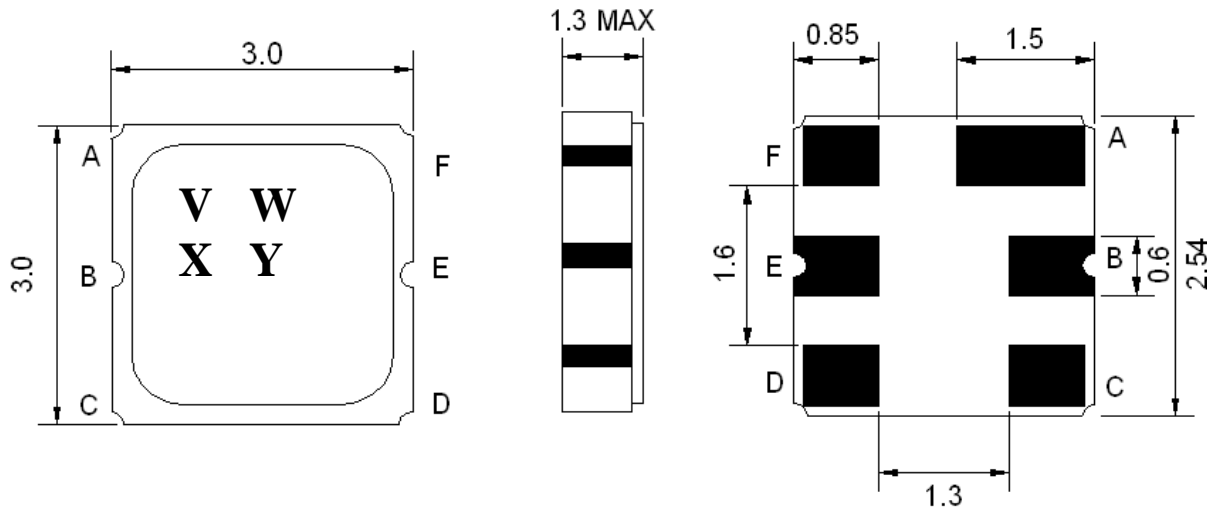

Testing Environment

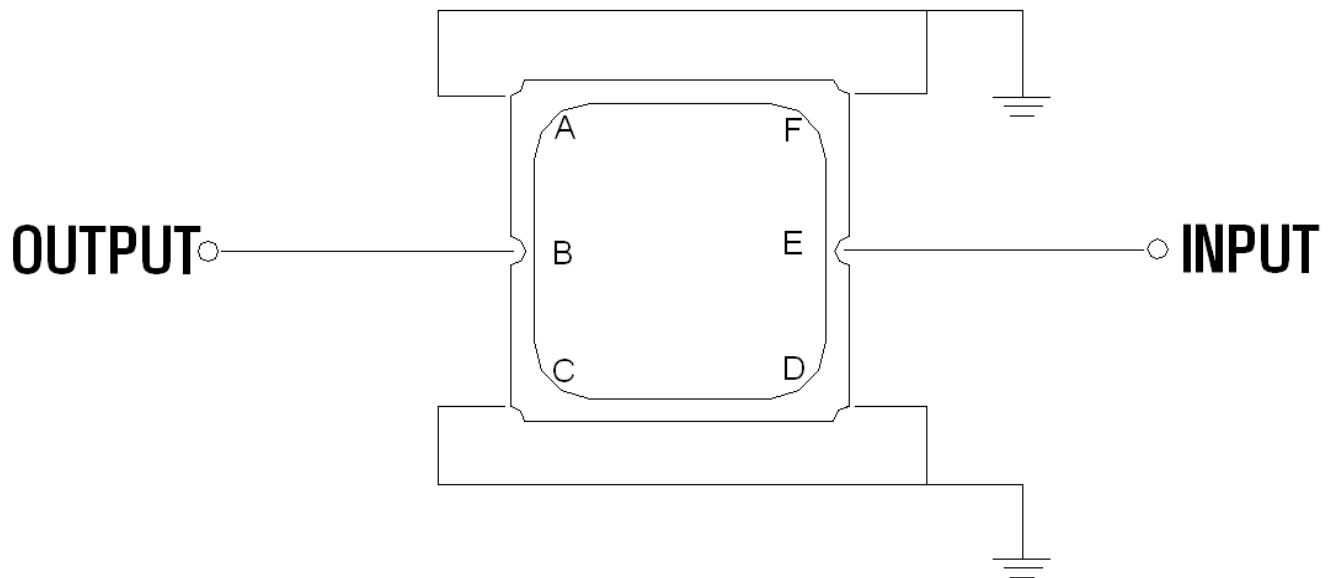

Source & Load Impedance: 50



866 MHz Wireless, RF Saw Filter

Part Number: AM866S517

Frequency Response

