




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	897.5	-
Insertion Loss within 880.0 ~ 915.0 MHz	dB	-	2.5	4.0
Amplitude Ripple within 880.0 ~ 915.0 MHz	dBp-p	-	1.0	1.8
VSWR within 880.0 ~ 915.0 MHz	-	-	1.7	2.2
<b>Attenuation:</b>				
DC ~ 860 MHz	dB	20	27	-
925 ~ 935 MHz	dB	9	15	-
935 ~ 960 MHz	dB	25	36	-
960 ~ 2000 MHz	dB	28	35	-


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-25	-	+75
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Load Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Package Size and Type	3.0 x 3.0 x 1.3 mm B1			



**Outline Drawing:**

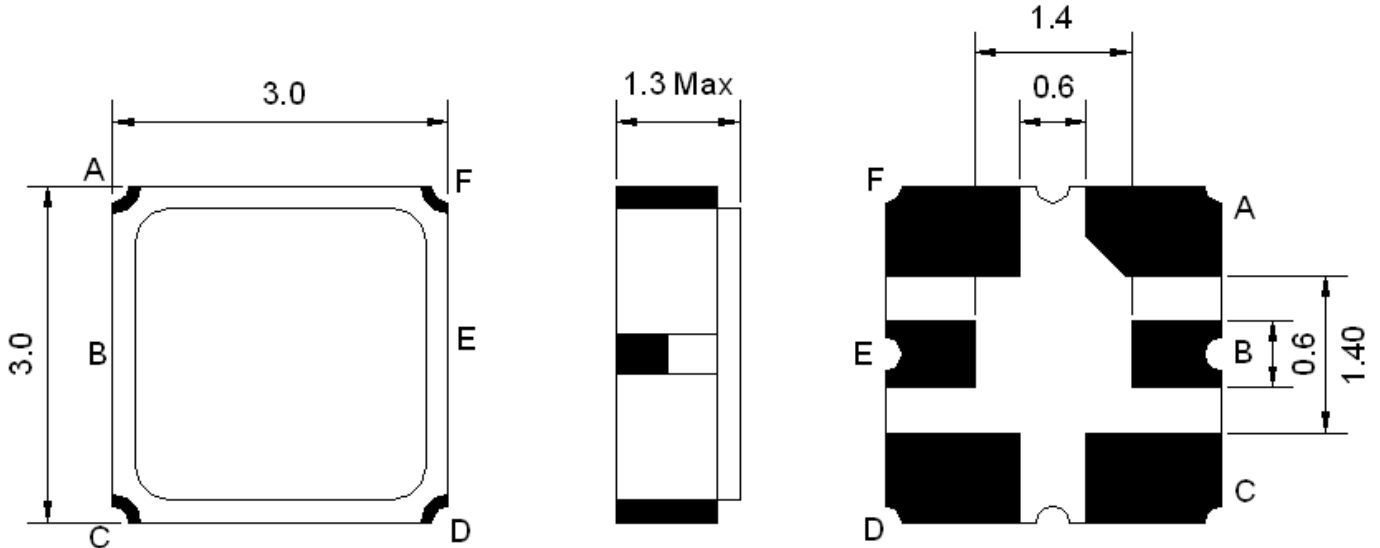

**Testing Environment:**

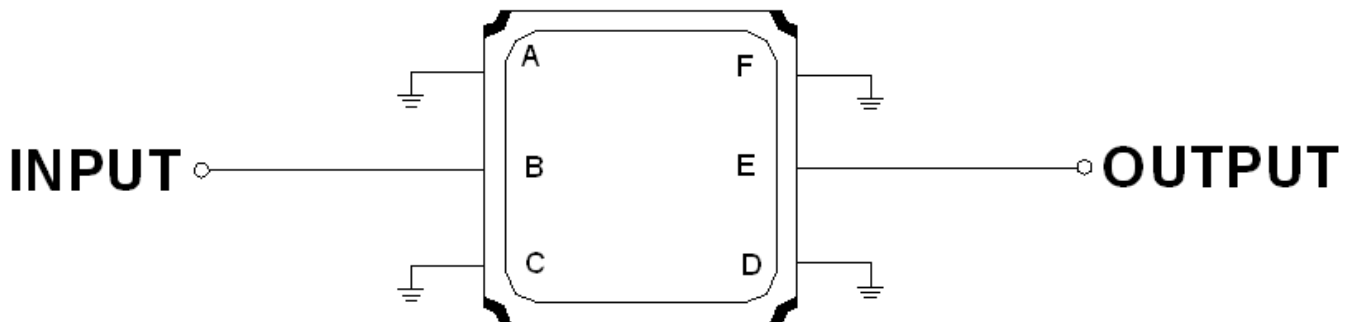

Source/Load Impedance: 50 Ω