



**Electrical specifications**

**Center Frequency:** 921.5 MHz  
**Bandwidth:** 11 MHz  
**VSWR:** 1.5 : 1 min  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 916-927 MHz  
**Passband Insertion Loss:** 2.5 dB max  
**Passband Ripple:** 0.5 dB max  
**Rejection:** 35 dB min at 857-895 MHz  
**Rejection 2:** 35 dB min at 970-1005 MHz  
**Rejection 3:** 40 dB min at 10-857 MHz  
**Rejection 4:** 40 dB min at 1005-1110 MHz  
**Rejection 5:** 30 dB min at 1110-2500 MHz  
**Power Handling:** 1W

**Mechanical**


**Mounting Method:** SMT  
**Dimensions:** .72" x .55" x .19"

**Environmental**

**Operating Temperature:** -30°C to 60°C  
**Storage Temperature:** -50°C to +90°C

**This product is RoHs compliant.**

**Outline Drawing:**

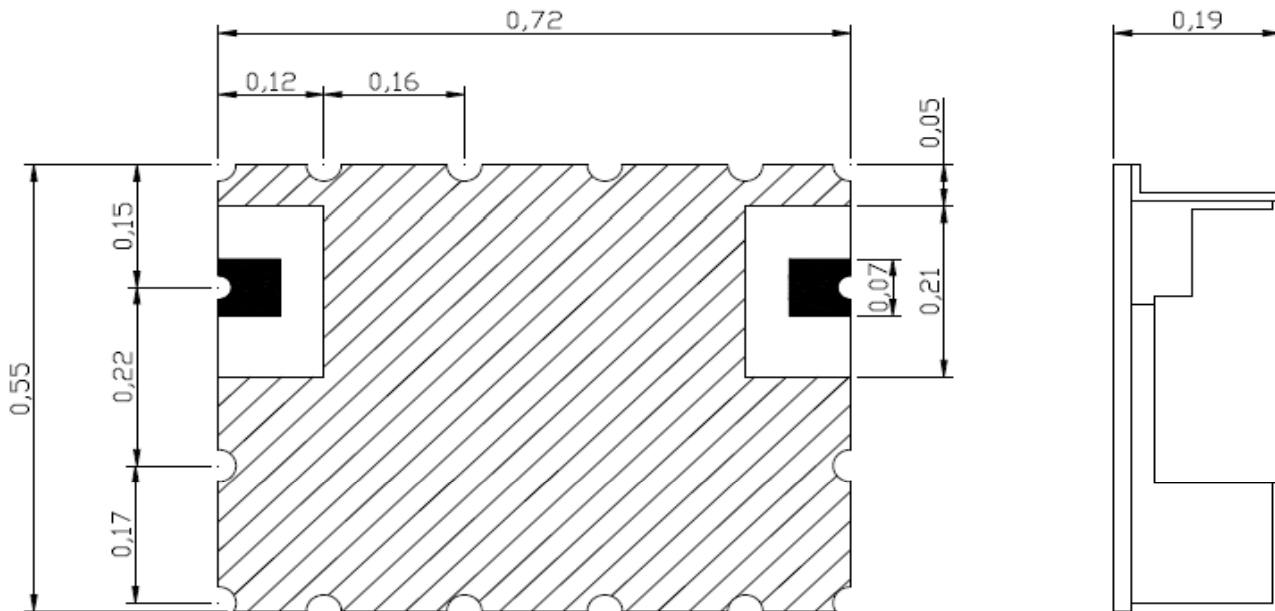

 IN/OUT PORT

 GROUND

UNIT : Inch