




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	927.0	-
Insertion Loss within 926 ~ 928 MHz	dB	-	2.6	3.5
Amplitude Ripple within 926 ~ 928 MHz	dB <sub>p-p</sub>	-	0.30	1.5
<b>Attenuation:</b>				
882 ~ 886 MHz	dB	40	49	-
902 ~ 906 MHz	dB	35	45	-
968 ~ 972 MHz	dB	40	50	-


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	0
Source Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Load Impedance (Single Ended) <sub>1</sub>	Ω	-	50	-
Package Size and Type	3.0 x 3.0 x 1.3 mm M			



### Outline Drawing:

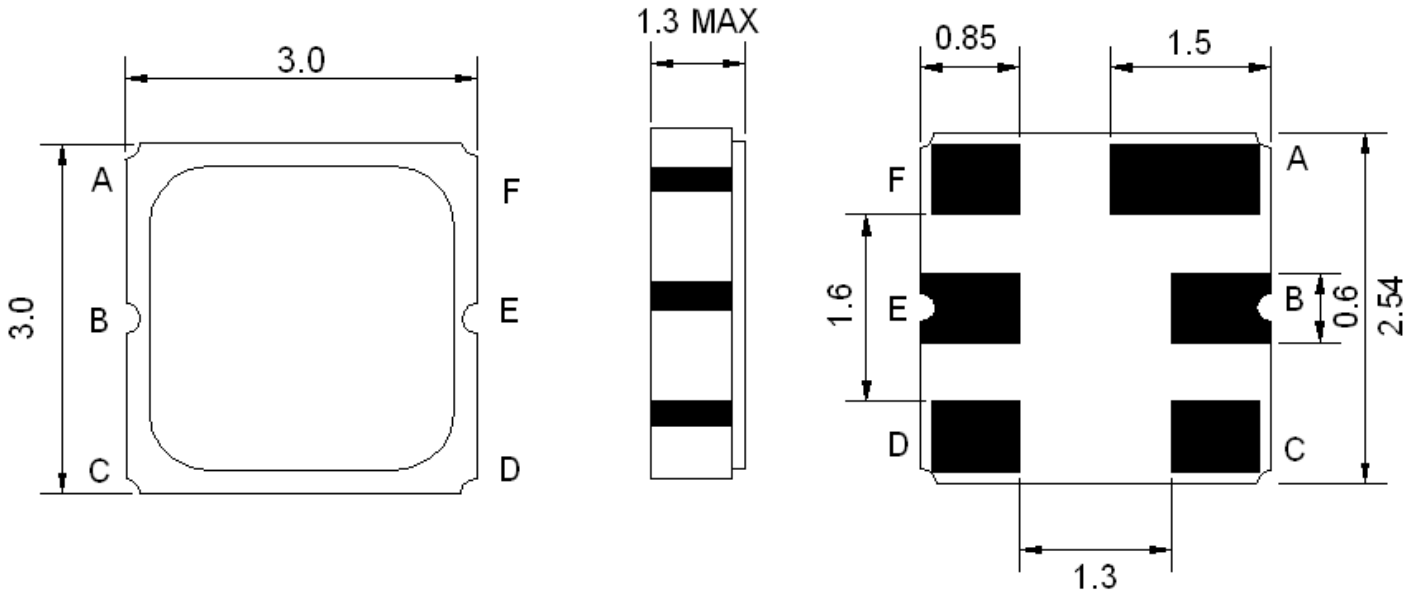

### Testing Environment:

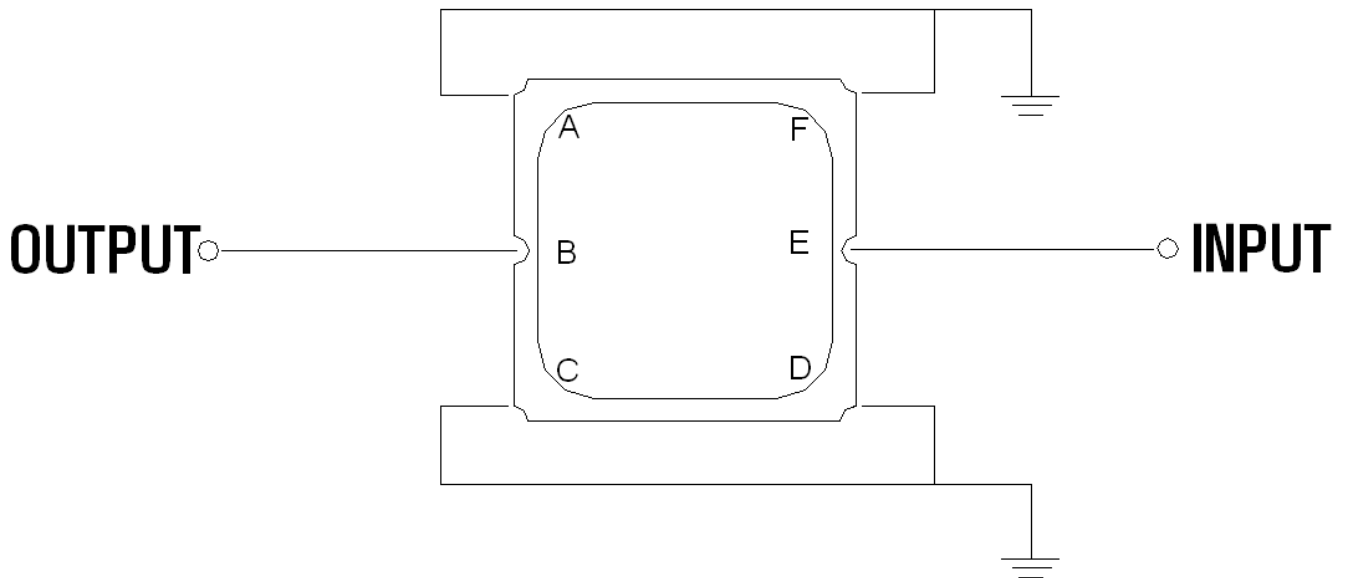

Source & Load Impedance: 50  $\Omega$



### Response Plot:

