



Electrical Specifications

Center Frequency: 10 MHz \pm 200 Hz
Insertion Loss: 3.0 dB Max @ CF \pm 2.5 kHz to
CF \pm 100 kHz
Ripple Variation: 1.0 dB P-P Max @ CF \pm 2.5 kHz
to CF \pm 100 kHz
Rejection: >60dB @ CF \pm 500 Hz


Mechanical

Connector Type: SMA (F)
Dimensions: 2.39 x 1.0 x 0.72 Inches

Environmental

Operating Temperature: -30 to +85° C
Storage Temperature: -40 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

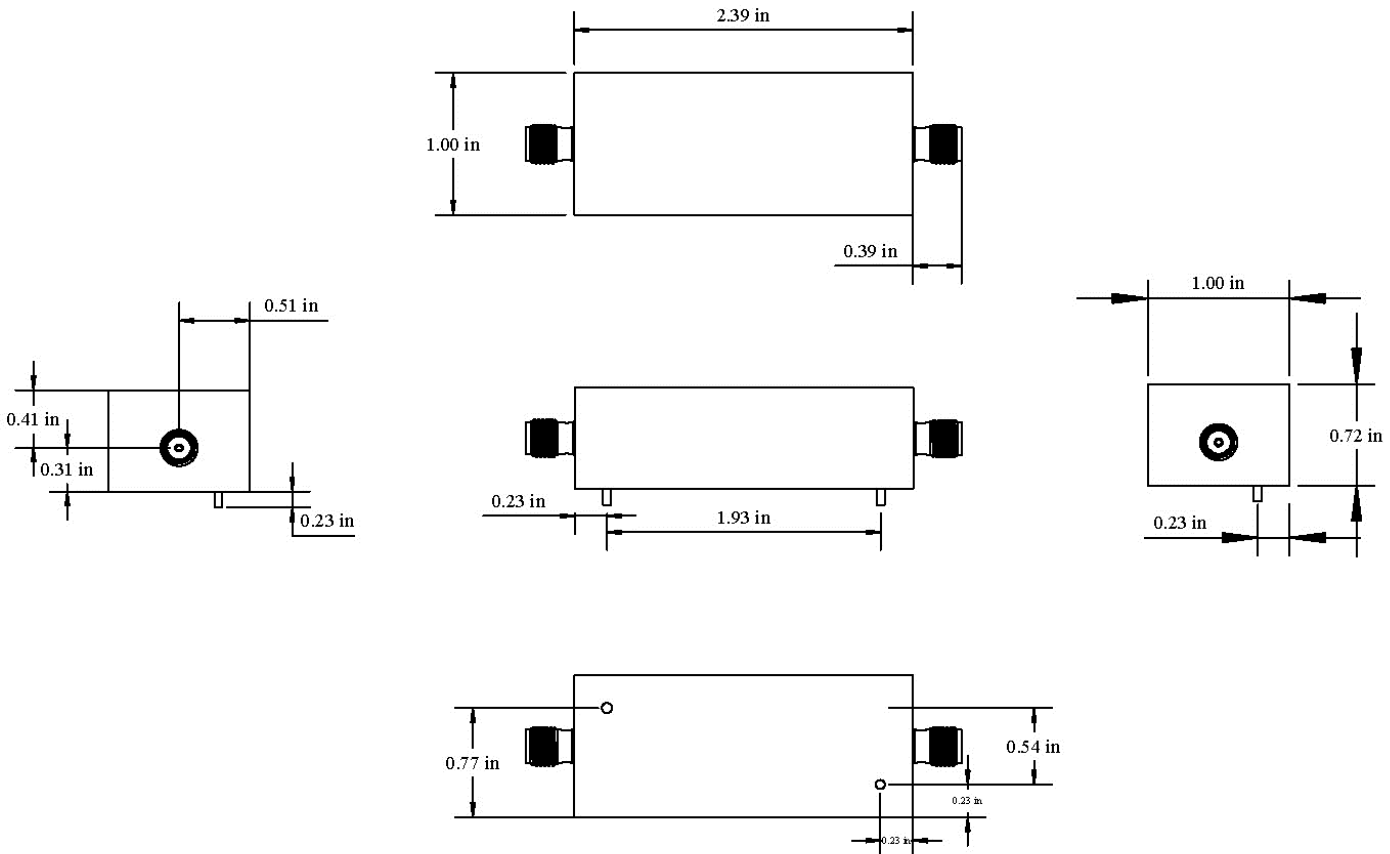



10 MHz Bandstop/Notch Crystal Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AS10N320



Response Plot:

