



Electrical specifications

Band 1: 1524-1560 MHz
Band 2: 1626-1660 MHz
Insertion Loss: 1.0 dB typ. 2.0 dB Max
Isolation: >40 dB
Return Loss: >16 dB
Power Handling: 20 W CW


Mechanical

Connector: SMA (F)
Dimensions: 5.98 x 3.23 x 1.89 inches

Environmental

Operating Temperature: -15 to +55 °C
Storage Temperature: -40 to +70 °C

Outline Drawing:

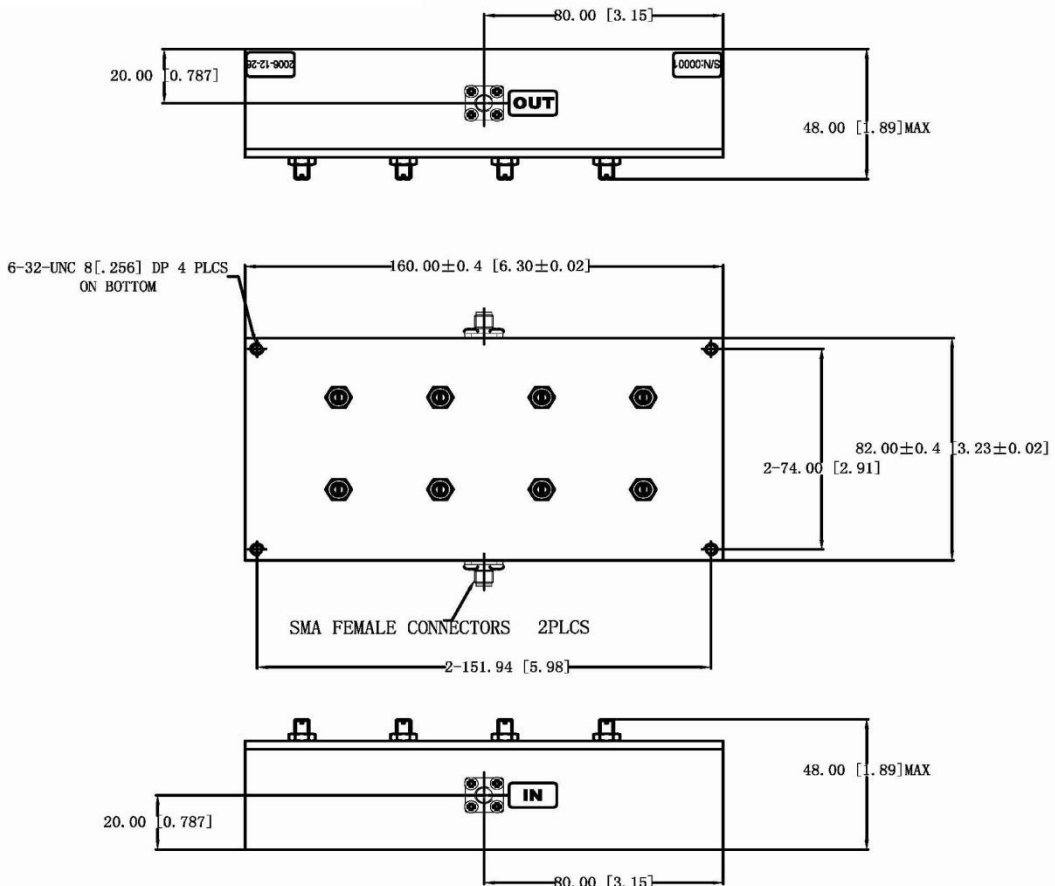



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

**1524-1560 / 1626-1660 MHz
Single In/Out Duplexer**

Part Number: DB5248



Plot:

