



31.1 GHz Cavity Bandpass Filter

Part Number: AB31000B1031



Electrical specifications

Center Frequency: 31 GHz
Bandwidth: 3.4 GHz
Input / Output Impedance: 50 Ohms
Passband: 29.4-32.8 GHz
Passband Insertion Loss: 1.0 dB Max
Passband Ripple: 0.2 Max
Passband Return Loss: 17 dB Min
Rejection: 50 dB @ 22.05 – 26 GHz
Rejection 2: 40 dB @ 36.75 – 48 GHz
Power Handling: 5 W


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: 2.92 mm Female
Dimensions (in): 1.575 x 0.630 x 0.433 in
Dimensions (mm): 40 x 16 x 11 mm

Environmental

Operating Temperature: -45 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

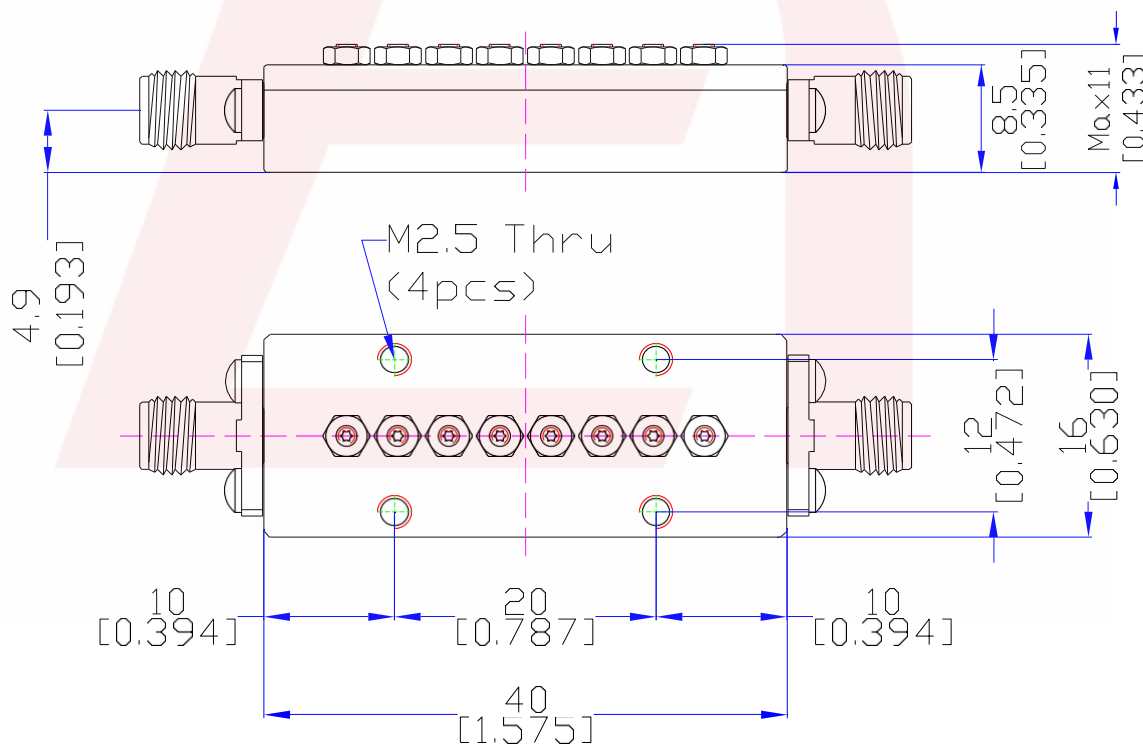

DS-B1031-07282020-Rev1




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

31.1 GHz Cavity Bandpass Filter

Part Number: AB31000B1031



Response Plot:

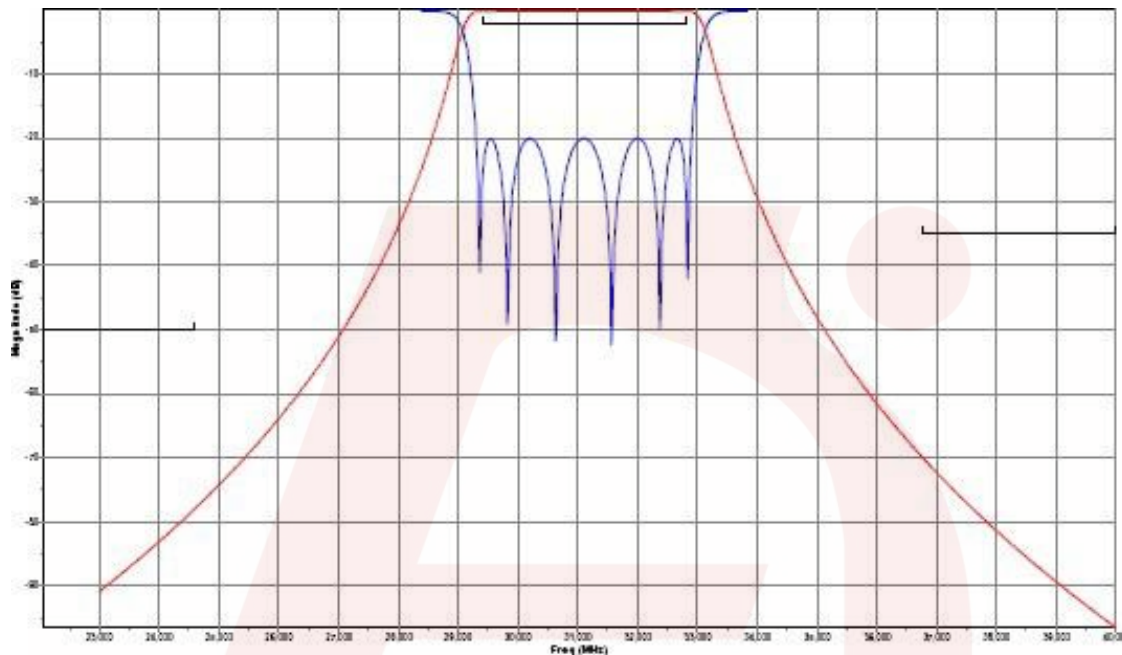

Overall performance

DS-B1031-07282020-Rev1