




36 MHz Crystal Notch Filter

P/N: AS36CN804

Center Frequency of Notch (F_0): 36 MHz
Stopband Width (SBW): 1000 Hz, 60 dB min
Low Side Passband (f_1 to f_2): -80 to -2 kHz, 3 dB
High Side Passband (f_3 to f_4): 2 to 80 kHz, 3 dB
Insertion Loss : 4 dB max
Ripple : 1 dB max
Impedance : 50 Ohm
Power Handling: 10 dBm max.
Package Style : SMA (F)

Dimensions:

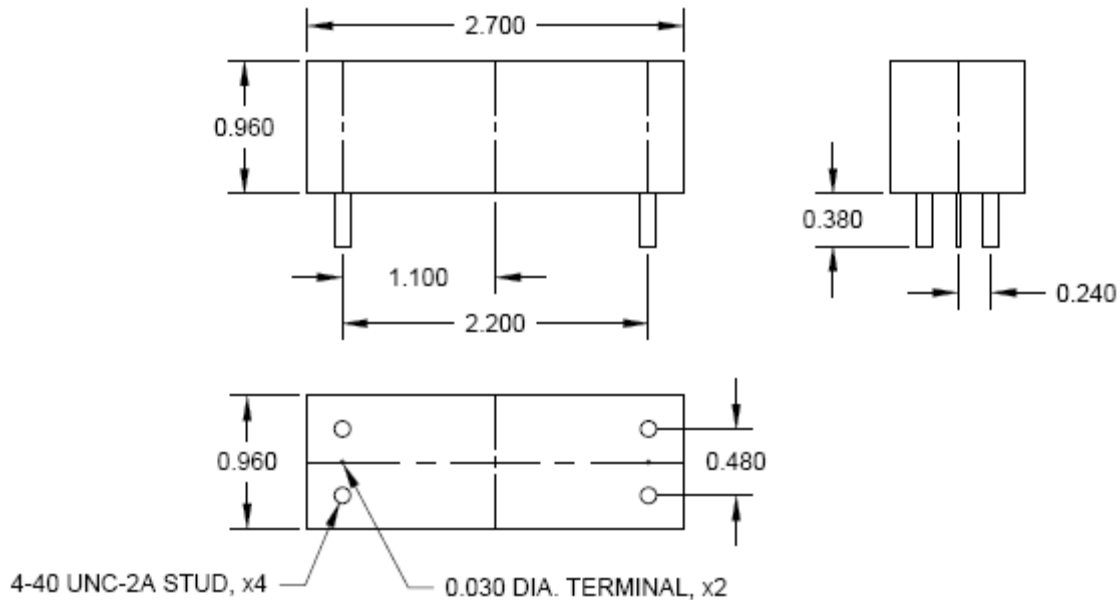



36 MHz Crystal Notch Filter

P/N: AS36CN804

