



160 MHz Saw Filter

Part Number: AM160S401



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	159.80	160.00	160.20
Insertion Loss at Fo	dB	-	24.00	25.50
Group Delay Variation	nsec	-	50	100
Absolute Delay at Fo	usec	-	1.56	-
Passband Ripple Variation	dB	-	0.75	1.00
Bandwidth at 3.0 dB	MHz	19.50	19.63	-
Bandwidth at 40.0 dB	MHz	-	21.65	21.80
Ultimate Rejection	dB	50	60	-
Substrate Material	128 LiNbO ₃			

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-




160 MHz Saw Filter

Part Number: AM160S401



Outline Drawing:

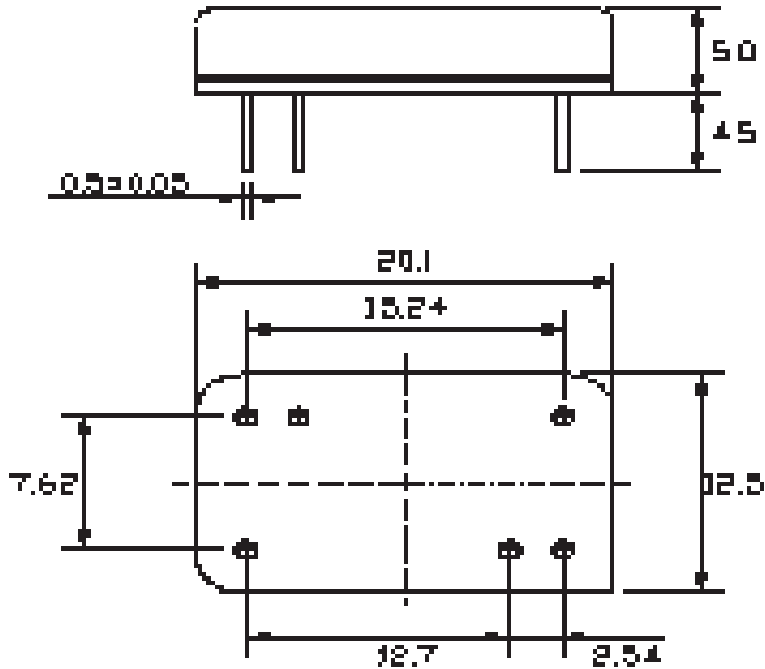

Testing Environment:



Bottom View

Source/Load Impedance = 50 Ω

Ambient Temperature = 25°C



160 MHz Saw Filter

Part Number: AM160S401



Frequency Response:

