



70.0 MHz Saw Filter
Part Number: AM70S225



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	69.62	70.00	70.08
Insertion Loss at Fo	dB	-	22.0	-
Passband Ripple Variation	dB	-	0.35	0.80
Group Delay Variation	nsec	-	80	150
Absolute Delay at Fo	µsec	-	2.45	-
Bandwidth at 3.0 dB	MHz	1.23	1.26	-
Bandwidth at 40.0 dB	MHz	-	2.15	2.40
Ultimate Rejection	dB	45	50	-
Substrate Material	Quartz			

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size	20.1 x 12.5 x 5.0 mm			




70.0 MHz Saw Filter


Part Number: AM70S225



Outline Drawing:

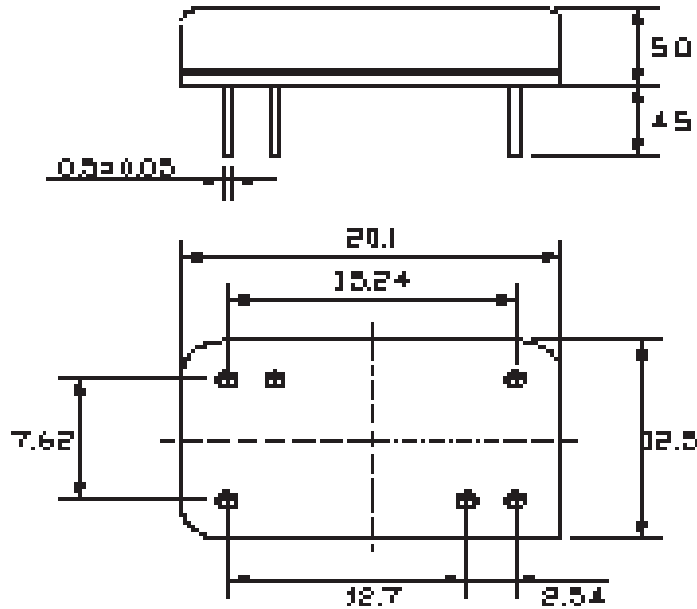

Matching Configuration:

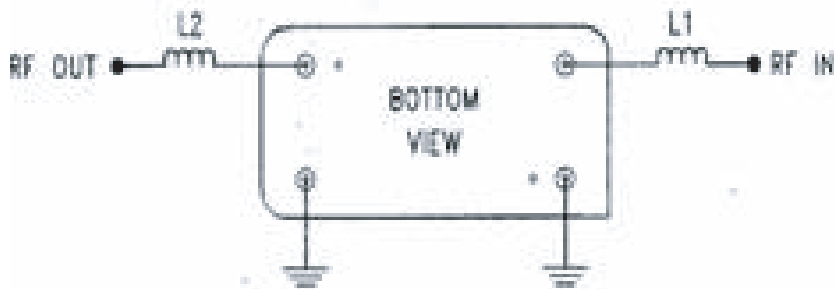

Bottom View

Source / Load Impedance = 50Ω
Ambient Temperature = 25°C



70.0 MHz Saw Filter

Part Number: AM70S225



Plot:

