



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

70.0 MHz Saw Filter

Part Number: AM70S281



Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	69.94	70.00	70.06
Insertion Loss at Fo	dB	-	30.0	32.0
Passband Ripple Variation	dB	-	0.7	1.0
Group Delay Variation	nsec	-	80	130
Absolute Delay at Fo	µsec	-	3.1	-
Bandwidth at 3.0 dB	MHz	14.50	14.65	-
Bandwidth at 40.0 dB	MHz	-	15.65	15.85
Ultimate Rejection	dB	50	55	-
Substrate Material	128 LiNbO ₃			

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size	36.0 x 12.8 x 5.0 mm			




70.0 MHz Saw Filter

Part Number: AM70S281



Outline Drawing:

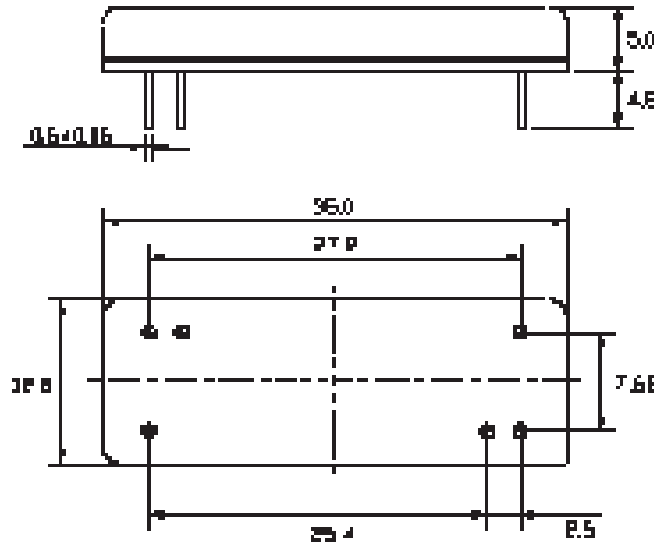

Matching Configuration:



Bottom View
Source/Load Impedance = 50
Ambient Temperature = 25°C



70.0 MHz Saw Filter

Part Number: AM70S281



Plot:

